


barbas .

User manual

BOX 35 35 70

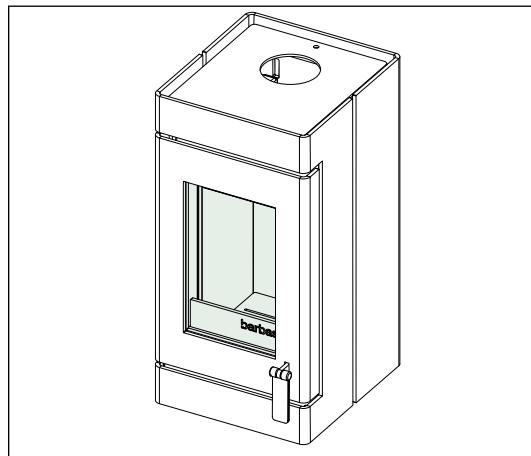

This product is not suitable for primary heating purposes



Version number: 357662 - 573-001
Date: 21-08-2025

Serial number:
Production date:

© Barbas BV

This document or parts thereof may not be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, nor otherwise, without the prior written permission of Barbas BV. This document could contain technical inaccuracies or typographical errors. Barbas BV reserves the right to revise this document from time to time in the contents thereof.

Contact information

Barbas BV

Hallenstraat 17, 5531 AB Bladel, The Netherlands

E-mail: info@barbas.com

www.barbas.com

Contents

| | | |
|-----------|--|-----------|
| 1 | Declaration of Performance..... | 5 |
| 1.1 | BOX 35 35 70 | 5 |
| 1.2 | BOX 35 35 70 with support frame..... | 6 |
| 2 | The Clean Air Act 1993 and Smoke Control Areas..... | 7 |
| 3 | About this document..... | 8 |
| 3.1 | How to work with this document..... | 8 |
| 3.2 | Warnings and cautions used in this document..... | 8 |
| 3.3 | Related documentation..... | 8 |
| 4 | Description..... | 9 |
| 4.1 | Overview of the front of the appliance..... | 9 |
| 4.2 | Intended use..... | 10 |
| 5 | Safety..... | 11 |
| 5.1 | Safety instructions for operation..... | 11 |
| 5.2 | Safety instructions with regard to the environment..... | 12 |
| 6 | Fuel..... | 13 |
| 6.1 | Fuel types..... | 13 |
| 6.2 | Fuel amount | 13 |
| 7 | Operation..... | 14 |
| 7.1 | Preparation before first use..... | 14 |
| 7.2 | First use of the appliance..... | 14 |
| 7.3 | Firing the appliance..... | 14 |
| 7.3.1 | First load and ignition..... | 14 |
| 7.3.2 | Reload with fuel..... | 16 |
| 7.3.3 | Control the burn process | 16 |
| 7.3.4 | General firing tips..... | 17 |
| 8 | Maintenance..... | 18 |
| 8.1 | Maintenance schedule..... | 18 |
| 8.2 | Remove the ashes..... | 18 |
| 8.3 | Clean the glass..... | 18 |
| 9 | Troubleshooting..... | 19 |
| 10 | Information on disposal of the appliance | 21 |

| | | |
|-----------|--|-----------|
| 11 | Technical data..... | 22 |
| 11.1 | Technical data..... | 22 |
| 11.2 | Product information according regulation (EU) 2015/1185..... | 24 |
| 11.3 | Explanation of used notations on typeshield..... | 25 |
| 12 | Warranty Terms..... | 26 |

1 Declaration of Performance

1.1 BOX 35 35 70

| barbas bellfires . Crafted to wonder | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------------------------------|--|--|-----------------------------------|--|-----------------------------|------------------------|--|-----------------------|--|----------------------------------|---|-----------------------|---------------------------|----------------------|--------------------------|-------|---|-------|---------------------------|--------|--|--|--|-------------------------------|------------------------|--------------------------|---|------------------------|------------------------|--|-----------------------|-----------------------|----------------------------------|----------------------|-----------------------|--|----------------------|----------------------|---|--|--|------------------------|---|-----------------------------|--------|----------------------|-------|--------------------|---------|--|----------------|--|--|--|------------------------|--|-------------------|--------|------------|--------|-----------------------------------|--------|-------------------------------|-----|-------------------------|---|--|--|--|------------------------|---------------------|-----------------------------------|-----|-----|-----|--|--|--|
| EU-declaration of conformity | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This EC declaration of conformity applies to the product described below and describes the conformity with the following directives: 2009/125/EC Directive for the setting of eco-design requirements for energy-related products (eco-design directive) Relevant Regulation: (EU) 2015/1185</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Declaration of Performance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| No. 2.305.080-0 - CPR-2013/07/01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Unique identification code of the product type: BOX 35 35 70 Intended use: Space heating in residential buildings Manufacturer: Barbas Bellfires BV; Hallenstraat 17; 5531 AB Bladel; The Netherlands | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| System of AVCP: 3 Harmonised technical specifications: EN 16510-2-1:2022 Notified body: No. 1639 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Essential characteristics <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><i>Mechanical resistance and stability</i></td> <td style="width: 40%; text-align: center;">Load bearing capacity</td> <td style="width: 30%; text-align: center;">120 kg</td> </tr> <tr> <td colspan="3"> Safety in case of fire - Protection of combustible materials <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Bottom (d₈):</td> <td style="width: 40%; text-align: center;">3 cm</td> </tr> <tr> <td>Floor in front (d₉):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Ceiling (d₁₀):</td> <td style="text-align: center;">50 cm</td> </tr> <tr> <td>Rear (d₁₁):</td> <td style="text-align: center;">20 cm</td> </tr> <tr> <td>Side (d₁₂):</td> <td style="text-align: center;">25 cm</td> </tr> <tr> <td>Side radiation area (d₁₃):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Front (d₁₄):</td> <td style="text-align: center;">100 cm</td> </tr> </table> </td> </tr> <tr> <td colspan="3"> Hygiene, health and the environment <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Carbon monoxide emission (CO)</td> <td style="width: 30%; text-align: center;">At nominal heat output</td> <td style="width: 40%; text-align: center;">At part load heat output</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td style="text-align: center;">1040 mg/m³</td> <td style="text-align: center;">1949 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td style="text-align: center;">102 mg/m³</td> <td style="text-align: center;">117 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td style="text-align: center;">59 mg/m³</td> <td style="text-align: center;">132 mg/m³</td> </tr> <tr> <td></td> <td style="text-align: center;">33 mg/m³</td> <td style="text-align: center;">30 mg/m³</td> </tr> </table> </td> </tr> <tr> <td colspan="3"> Safety and accessibility in use <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Data for installation to a chimney</td> </tr> <tr> <td>Flue gas outlet temperature</td> <td style="text-align: center;">312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td style="text-align: center;">12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td style="text-align: center;">4.3 g/s</td> </tr> <tr> <td>Fire safety of installation to the chimney</td> <td style="text-align: center;">T400 G minimum</td> </tr> </table> </td> </tr> <tr> <td colspan="3"> Energy economy and heat retention <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Appliance's thermal heat output and energy efficiency</td> </tr> <tr> <td>Space heat output</td> <td style="text-align: center;">3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td style="text-align: center;">76.9 %</td> </tr> <tr> <td>Seasonal space heating efficiency</td> <td style="text-align: center;">66.9 %</td> </tr> <tr> <td>Energy efficiency index (EEI)</td> <td style="text-align: center;">102</td> </tr> <tr> <td>Energy efficiency class</td> <td style="text-align: center;">A</td> </tr> </table> </td> </tr> <tr> <td colspan="3"> Sustainable use of natural resources <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 30%; text-align: center;">Standby mode</td> <td style="width: 40%; text-align: center;">Electric power consumption</td> </tr> <tr> <td>N/A</td> <td style="text-align: center;">N/A</td> <td style="text-align: center;">N/A</td> </tr> </table> </td> </tr> <tr> <td colspan="3"> <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> <p>Signed for and on behalf of the manufacturer by:</p> <p>Danny Baijens, CEO  Bladel, The Netherlands 08 July 2025</p> </td> </tr> </table> | | | <i>Mechanical resistance and stability</i> | Load bearing capacity | 120 kg | Safety in case of fire - Protection of combustible materials <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Bottom (d₈):</td> <td style="width: 40%; text-align: center;">3 cm</td> </tr> <tr> <td>Floor in front (d₉):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Ceiling (d₁₀):</td> <td style="text-align: center;">50 cm</td> </tr> <tr> <td>Rear (d₁₁):</td> <td style="text-align: center;">20 cm</td> </tr> <tr> <td>Side (d₁₂):</td> <td style="text-align: center;">25 cm</td> </tr> <tr> <td>Side radiation area (d₁₃):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Front (d₁₄):</td> <td style="text-align: center;">100 cm</td> </tr> </table> | | | Bottom (d ₈): | 3 cm | Floor in front (d ₉): | 40 cm | Ceiling (d ₁₀): | 50 cm | Rear (d ₁₁): | 20 cm | Side (d ₁₂): | 25 cm | Side radiation area (d ₁₃): | 40 cm | Front (d ₁₄): | 100 cm | Hygiene, health and the environment <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Carbon monoxide emission (CO)</td> <td style="width: 30%; text-align: center;">At nominal heat output</td> <td style="width: 40%; text-align: center;">At part load heat output</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td style="text-align: center;">1040 mg/m³</td> <td style="text-align: center;">1949 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td style="text-align: center;">102 mg/m³</td> <td style="text-align: center;">117 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td style="text-align: center;">59 mg/m³</td> <td style="text-align: center;">132 mg/m³</td> </tr> <tr> <td></td> <td style="text-align: center;">33 mg/m³</td> <td style="text-align: center;">30 mg/m³</td> </tr> </table> | | | Carbon monoxide emission (CO) | At nominal heat output | At part load heat output | Nitrogen oxides emission (NO _x) | 1040 mg/m ³ | 1949 mg/m ³ | Emission of organic gaseous carbon (OGC) | 102 mg/m ³ | 117 mg/m ³ | Particulate matter emission (PM) | 59 mg/m ³ | 132 mg/m ³ | | 33 mg/m ³ | 30 mg/m ³ | Safety and accessibility in use <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Data for installation to a chimney</td> </tr> <tr> <td>Flue gas outlet temperature</td> <td style="text-align: center;">312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td style="text-align: center;">12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td style="text-align: center;">4.3 g/s</td> </tr> <tr> <td>Fire safety of installation to the chimney</td> <td style="text-align: center;">T400 G minimum</td> </tr> </table> | | | At nominal heat output | Data for installation to a chimney | Flue gas outlet temperature | 312 °C | Minimum flue draught | 12 Pa | Flue gas mass flow | 4.3 g/s | Fire safety of installation to the chimney | T400 G minimum | Energy economy and heat retention <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Appliance's thermal heat output and energy efficiency</td> </tr> <tr> <td>Space heat output</td> <td style="text-align: center;">3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td style="text-align: center;">76.9 %</td> </tr> <tr> <td>Seasonal space heating efficiency</td> <td style="text-align: center;">66.9 %</td> </tr> <tr> <td>Energy efficiency index (EEI)</td> <td style="text-align: center;">102</td> </tr> <tr> <td>Energy efficiency class</td> <td style="text-align: center;">A</td> </tr> </table> | | | At nominal heat output | Appliance's thermal heat output and energy efficiency | Space heat output | 3.8 kW | Efficiency | 76.9 % | Seasonal space heating efficiency | 66.9 % | Energy efficiency index (EEI) | 102 | Energy efficiency class | A | Sustainable use of natural resources <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 30%; text-align: center;">Standby mode</td> <td style="width: 40%; text-align: center;">Electric power consumption</td> </tr> <tr> <td>N/A</td> <td style="text-align: center;">N/A</td> <td style="text-align: center;">N/A</td> </tr> </table> | | | At nominal heat output | Standby mode | Electric power consumption | N/A | N/A | N/A | <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> <p>Signed for and on behalf of the manufacturer by:</p> <p>Danny Baijens, CEO  Bladel, The Netherlands 08 July 2025</p> | | |
| <i>Mechanical resistance and stability</i> | Load bearing capacity | 120 kg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Safety in case of fire - Protection of combustible materials <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Bottom (d₈):</td> <td style="width: 40%; text-align: center;">3 cm</td> </tr> <tr> <td>Floor in front (d₉):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Ceiling (d₁₀):</td> <td style="text-align: center;">50 cm</td> </tr> <tr> <td>Rear (d₁₁):</td> <td style="text-align: center;">20 cm</td> </tr> <tr> <td>Side (d₁₂):</td> <td style="text-align: center;">25 cm</td> </tr> <tr> <td>Side radiation area (d₁₃):</td> <td style="text-align: center;">40 cm</td> </tr> <tr> <td>Front (d₁₄):</td> <td style="text-align: center;">100 cm</td> </tr> </table> | | | Bottom (d ₈): | 3 cm | Floor in front (d ₉): | 40 cm | Ceiling (d ₁₀): | 50 cm | Rear (d ₁₁): | 20 cm | Side (d ₁₂): | 25 cm | Side radiation area (d ₁₃): | 40 cm | Front (d ₁₄): | 100 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bottom (d ₈): | 3 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Floor in front (d ₉): | 40 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ceiling (d ₁₀): | 50 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rear (d ₁₁): | 20 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Side (d ₁₂): | 25 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Side radiation area (d ₁₃): | 40 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Front (d ₁₄): | 100 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hygiene, health and the environment <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Carbon monoxide emission (CO)</td> <td style="width: 30%; text-align: center;">At nominal heat output</td> <td style="width: 40%; text-align: center;">At part load heat output</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td style="text-align: center;">1040 mg/m³</td> <td style="text-align: center;">1949 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td style="text-align: center;">102 mg/m³</td> <td style="text-align: center;">117 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td style="text-align: center;">59 mg/m³</td> <td style="text-align: center;">132 mg/m³</td> </tr> <tr> <td></td> <td style="text-align: center;">33 mg/m³</td> <td style="text-align: center;">30 mg/m³</td> </tr> </table> | | | Carbon monoxide emission (CO) | At nominal heat output | At part load heat output | Nitrogen oxides emission (NO _x) | 1040 mg/m ³ | 1949 mg/m ³ | Emission of organic gaseous carbon (OGC) | 102 mg/m ³ | 117 mg/m ³ | Particulate matter emission (PM) | 59 mg/m ³ | 132 mg/m ³ | | 33 mg/m ³ | 30 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbon monoxide emission (CO) | At nominal heat output | At part load heat output | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nitrogen oxides emission (NO _x) | 1040 mg/m ³ | 1949 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Emission of organic gaseous carbon (OGC) | 102 mg/m ³ | 117 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Particulate matter emission (PM) | 59 mg/m ³ | 132 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 33 mg/m ³ | 30 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Safety and accessibility in use <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Data for installation to a chimney</td> </tr> <tr> <td>Flue gas outlet temperature</td> <td style="text-align: center;">312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td style="text-align: center;">12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td style="text-align: center;">4.3 g/s</td> </tr> <tr> <td>Fire safety of installation to the chimney</td> <td style="text-align: center;">T400 G minimum</td> </tr> </table> | | | At nominal heat output | Data for installation to a chimney | Flue gas outlet temperature | 312 °C | Minimum flue draught | 12 Pa | Flue gas mass flow | 4.3 g/s | Fire safety of installation to the chimney | T400 G minimum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | Data for installation to a chimney | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Flue gas outlet temperature | 312 °C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum flue draught | 12 Pa | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Flue gas mass flow | 4.3 g/s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire safety of installation to the chimney | T400 G minimum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy economy and heat retention <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 70%; text-align: center;">Appliance's thermal heat output and energy efficiency</td> </tr> <tr> <td>Space heat output</td> <td style="text-align: center;">3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td style="text-align: center;">76.9 %</td> </tr> <tr> <td>Seasonal space heating efficiency</td> <td style="text-align: center;">66.9 %</td> </tr> <tr> <td>Energy efficiency index (EEI)</td> <td style="text-align: center;">102</td> </tr> <tr> <td>Energy efficiency class</td> <td style="text-align: center;">A</td> </tr> </table> | | | At nominal heat output | Appliance's thermal heat output and energy efficiency | Space heat output | 3.8 kW | Efficiency | 76.9 % | Seasonal space heating efficiency | 66.9 % | Energy efficiency index (EEI) | 102 | Energy efficiency class | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | Appliance's thermal heat output and energy efficiency | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Space heat output | 3.8 kW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Efficiency | 76.9 % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Seasonal space heating efficiency | 66.9 % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy efficiency index (EEI) | 102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy efficiency class | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sustainable use of natural resources <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">At nominal heat output</td> <td style="width: 30%; text-align: center;">Standby mode</td> <td style="width: 40%; text-align: center;">Electric power consumption</td> </tr> <tr> <td>N/A</td> <td style="text-align: center;">N/A</td> <td style="text-align: center;">N/A</td> </tr> </table> | | | At nominal heat output | Standby mode | Electric power consumption | N/A | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | Standby mode | Electric power consumption | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N/A | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> <p>Signed for and on behalf of the manufacturer by:</p> <p>Danny Baijens, CEO  Bladel, The Netherlands 08 July 2025</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1.2

BOX 35 35 70 with support frame

| EU-declaration of conformity | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|---|---------------------------|-----------------------------------|-----------------------------------|--|----------------------------|---|-------------------------|----------------------------------|-------------------------|-----------------------------------|---|----------------------------|---------------------------|-------------------------|--------------------|-------------------------|-------|---|-------|---------------------------|--------|--|--|--|------------------------|--------------------------|-------------------------------|------------------------|---|-----------------------|--|----------------------|----------------------------------|----------------------|--|--|--|------------------------------------|--|------------------------|--------------------------|-----------------------------|--------|----------------------|-------|--------------------|---------|---|--|--|----------------|--|--|--|--|--|---|--|------------------------|--------------------------|-------------------|--------|------------|--------|---|--|--|--------------------------|--|-----------------------------------|--------|-------------------------------|-----|-------------------------|---|---|--|--|------------------------|--------------------------|--------------|----------------------------|-----|-----|--|--|--|------------------------------|-----|---|--|--|---|--|--|--------------------|---|---|
| <p>This EC declaration of conformity applies to the product described below and describes the conformity with the following directives: 2009/125/EC Directive for the setting of eco-design requirements for energy-related products (eco-design directive) Relevant Regulation: (EU) 2015/1185</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Declaration of Performance No. 2.305.082-0 - CPR-2013/07/01</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Unique identification code of the product type: BOX 35 35 70 with support frame Intended use: Space heating in residential buildings Manufacturer: Barbas Bellfires BV; Hallenstraat 17; 5531 AB Bladel; The Netherlands</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>System of AVCP: 3 Harmonised technical specifications: EN 16510-2-1:2022 Notified body: No. 1639</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Essential characteristics</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th colspan="2">Mechanical resistance and stability</th> </tr> <tr> <th>Load bearing capacity</th> <th>120 kg</th> </tr> </thead> <tbody> <tr> <td colspan="2"> Safety in case of fire - Protection of combustible materials <table border="1"> <thead> <tr> <th colspan="2">Minimum distance to combustible materials</th> </tr> <tr> <th>Bottom (d_u):</th> <th>3 cm</th> </tr> </thead> <tbody> <tr> <td>Floor in front (d_f):</td> <td>200 - 550</td> </tr> <tr> <td>Ceiling (d_c):</td> <td>50 cm</td> </tr> <tr> <td>Rear (d_r):</td> <td>non flammable wall</td> </tr> <tr> <td>Side (d_s):</td> <td>25 cm</td> </tr> <tr> <td>Side radiation area (d_{rs}):</td> <td>40 cm</td> </tr> <tr> <td>Front (d_{rf}):</td> <td>100 cm</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> Hygiene, health and the environment <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Carbon monoxide emission (CO)</td> <td>1040 mg/m³</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td>102 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td>59 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td>33 mg/m³</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> Safety and accessibility in use <table border="1"> <thead> <tr> <th colspan="2">Data for installation to a chimney</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Flue gas outlet temperature</td> <td>312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td>12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td>4.3 g/s</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> Fire safety of installation to the chimney <table border="1"> <thead> <tr> <th colspan="3">T400 G minimum</th> </tr> </thead> </table> </td> </tr> <tr> <td colspan="3"> Energy economy and heat retention <table border="1"> <thead> <tr> <th colspan="2">Appliance's thermal heat output and energy efficiency</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Space heat output</td> <td>3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td>76.9 %</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> <table border="1"> <thead> <tr> <th colspan="2">Space heating efficiency</th> </tr> <tr> <th>Seasonal space heating efficiency</th> <th>66.9 %</th> </tr> <tr> <th>Energy efficiency index (EEI)</th> <th>102</th> </tr> <tr> <th>Energy efficiency class</th> <th>A</th> </tr> </thead> </table> </td> </tr> <tr> <td colspan="3"> <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> <th>Standby mode</th> </tr> </thead> <tbody> <tr> <td>Electric power consumption</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> Sustainable use of natural resources <table border="1"> <thead> <tr> <th>Environmental sustainability</th> </tr> </thead> <tbody> <tr> <td>NPD</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="3"> <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> </td> </tr> <tr> <td colspan="3"> <p>Signed for and on behalf of the manufacturer by:</p> </td> </tr> <tr> <td>Danny Baijens, CEO</td> <td></td> <td>Bladel, The Netherlands 08 July 2025</td> </tr> </tbody> </table> | | | Mechanical resistance and stability | | Load bearing capacity | 120 kg | Safety in case of fire - Protection of combustible materials <table border="1"> <thead> <tr> <th colspan="2">Minimum distance to combustible materials</th> </tr> <tr> <th>Bottom (d_u):</th> <th>3 cm</th> </tr> </thead> <tbody> <tr> <td>Floor in front (d_f):</td> <td>200 - 550</td> </tr> <tr> <td>Ceiling (d_c):</td> <td>50 cm</td> </tr> <tr> <td>Rear (d_r):</td> <td>non flammable wall</td> </tr> <tr> <td>Side (d_s):</td> <td>25 cm</td> </tr> <tr> <td>Side radiation area (d_{rs}):</td> <td>40 cm</td> </tr> <tr> <td>Front (d_{rf}):</td> <td>100 cm</td> </tr> </tbody> </table> | | Minimum distance to combustible materials | | Bottom (d _u): | 3 cm | Floor in front (d _f): | 200 - 550 | Ceiling (d _c): | 50 cm | Rear (d _r): | non flammable wall | Side (d _s): | 25 cm | Side radiation area (d _{rs}): | 40 cm | Front (d _{rf}): | 100 cm | Hygiene, health and the environment <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Carbon monoxide emission (CO)</td> <td>1040 mg/m³</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td>102 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td>59 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td>33 mg/m³</td> </tr> </tbody> </table> | | | At nominal heat output | At part load heat output | Carbon monoxide emission (CO) | 1040 mg/m ³ | Nitrogen oxides emission (NO _x) | 102 mg/m ³ | Emission of organic gaseous carbon (OGC) | 59 mg/m ³ | Particulate matter emission (PM) | 33 mg/m ³ | Safety and accessibility in use <table border="1"> <thead> <tr> <th colspan="2">Data for installation to a chimney</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Flue gas outlet temperature</td> <td>312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td>12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td>4.3 g/s</td> </tr> </tbody> </table> | | | Data for installation to a chimney | | At nominal heat output | At part load heat output | Flue gas outlet temperature | 312 °C | Minimum flue draught | 12 Pa | Flue gas mass flow | 4.3 g/s | Fire safety of installation to the chimney <table border="1"> <thead> <tr> <th colspan="3">T400 G minimum</th> </tr> </thead> </table> | | | T400 G minimum | | | Energy economy and heat retention <table border="1"> <thead> <tr> <th colspan="2">Appliance's thermal heat output and energy efficiency</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Space heat output</td> <td>3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td>76.9 %</td> </tr> </tbody> </table> | | | Appliance's thermal heat output and energy efficiency | | At nominal heat output | At part load heat output | Space heat output | 3.8 kW | Efficiency | 76.9 % | <table border="1"> <thead> <tr> <th colspan="2">Space heating efficiency</th> </tr> <tr> <th>Seasonal space heating efficiency</th> <th>66.9 %</th> </tr> <tr> <th>Energy efficiency index (EEI)</th> <th>102</th> </tr> <tr> <th>Energy efficiency class</th> <th>A</th> </tr> </thead> </table> | | | Space heating efficiency | | Seasonal space heating efficiency | 66.9 % | Energy efficiency index (EEI) | 102 | Energy efficiency class | A | <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> <th>Standby mode</th> </tr> </thead> <tbody> <tr> <td>Electric power consumption</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> | | | At nominal heat output | At part load heat output | Standby mode | Electric power consumption | N/A | N/A | Sustainable use of natural resources <table border="1"> <thead> <tr> <th>Environmental sustainability</th> </tr> </thead> <tbody> <tr> <td>NPD</td> </tr> </tbody> </table> | | | Environmental sustainability | NPD | <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> | | | <p>Signed for and on behalf of the manufacturer by:</p> | | | Danny Baijens, CEO |  | Bladel, The Netherlands 08 July 2025 |
| Mechanical resistance and stability | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Load bearing capacity | 120 kg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Safety in case of fire - Protection of combustible materials <table border="1"> <thead> <tr> <th colspan="2">Minimum distance to combustible materials</th> </tr> <tr> <th>Bottom (d_u):</th> <th>3 cm</th> </tr> </thead> <tbody> <tr> <td>Floor in front (d_f):</td> <td>200 - 550</td> </tr> <tr> <td>Ceiling (d_c):</td> <td>50 cm</td> </tr> <tr> <td>Rear (d_r):</td> <td>non flammable wall</td> </tr> <tr> <td>Side (d_s):</td> <td>25 cm</td> </tr> <tr> <td>Side radiation area (d_{rs}):</td> <td>40 cm</td> </tr> <tr> <td>Front (d_{rf}):</td> <td>100 cm</td> </tr> </tbody> </table> | | Minimum distance to combustible materials | | Bottom (d _u): | 3 cm | Floor in front (d _f): | 200 - 550 | Ceiling (d _c): | 50 cm | Rear (d _r): | non flammable wall | Side (d _s): | 25 cm | Side radiation area (d _{rs}): | 40 cm | Front (d _{rf}): | 100 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum distance to combustible materials | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bottom (d _u): | 3 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Floor in front (d _f): | 200 - 550 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ceiling (d _c): | 50 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rear (d _r): | non flammable wall | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Side (d _s): | 25 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Side radiation area (d _{rs}): | 40 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Front (d _{rf}): | 100 cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hygiene, health and the environment <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Carbon monoxide emission (CO)</td> <td>1040 mg/m³</td> </tr> <tr> <td>Nitrogen oxides emission (NO_x)</td> <td>102 mg/m³</td> </tr> <tr> <td>Emission of organic gaseous carbon (OGC)</td> <td>59 mg/m³</td> </tr> <tr> <td>Particulate matter emission (PM)</td> <td>33 mg/m³</td> </tr> </tbody> </table> | | | At nominal heat output | At part load heat output | Carbon monoxide emission (CO) | 1040 mg/m ³ | Nitrogen oxides emission (NO _x) | 102 mg/m ³ | Emission of organic gaseous carbon (OGC) | 59 mg/m ³ | Particulate matter emission (PM) | 33 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | At part load heat output | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carbon monoxide emission (CO) | 1040 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nitrogen oxides emission (NO _x) | 102 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Emission of organic gaseous carbon (OGC) | 59 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Particulate matter emission (PM) | 33 mg/m ³ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Safety and accessibility in use <table border="1"> <thead> <tr> <th colspan="2">Data for installation to a chimney</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Flue gas outlet temperature</td> <td>312 °C</td> </tr> <tr> <td>Minimum flue draught</td> <td>12 Pa</td> </tr> <tr> <td>Flue gas mass flow</td> <td>4.3 g/s</td> </tr> </tbody> </table> | | | Data for installation to a chimney | | At nominal heat output | At part load heat output | Flue gas outlet temperature | 312 °C | Minimum flue draught | 12 Pa | Flue gas mass flow | 4.3 g/s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Data for installation to a chimney | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | At part load heat output | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Flue gas outlet temperature | 312 °C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum flue draught | 12 Pa | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Flue gas mass flow | 4.3 g/s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire safety of installation to the chimney <table border="1"> <thead> <tr> <th colspan="3">T400 G minimum</th> </tr> </thead> </table> | | | T400 G minimum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T400 G minimum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy economy and heat retention <table border="1"> <thead> <tr> <th colspan="2">Appliance's thermal heat output and energy efficiency</th> </tr> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> </tr> </thead> <tbody> <tr> <td>Space heat output</td> <td>3.8 kW</td> </tr> <tr> <td>Efficiency</td> <td>76.9 %</td> </tr> </tbody> </table> | | | Appliance's thermal heat output and energy efficiency | | At nominal heat output | At part load heat output | Space heat output | 3.8 kW | Efficiency | 76.9 % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Appliance's thermal heat output and energy efficiency | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | At part load heat output | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Space heat output | 3.8 kW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Efficiency | 76.9 % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th colspan="2">Space heating efficiency</th> </tr> <tr> <th>Seasonal space heating efficiency</th> <th>66.9 %</th> </tr> <tr> <th>Energy efficiency index (EEI)</th> <th>102</th> </tr> <tr> <th>Energy efficiency class</th> <th>A</th> </tr> </thead> </table> | | | Space heating efficiency | | Seasonal space heating efficiency | 66.9 % | Energy efficiency index (EEI) | 102 | Energy efficiency class | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Space heating efficiency | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Seasonal space heating efficiency | 66.9 % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy efficiency index (EEI) | 102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Energy efficiency class | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>At nominal heat output</th> <th>At part load heat output</th> <th>Standby mode</th> </tr> </thead> <tbody> <tr> <td>Electric power consumption</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> | | | At nominal heat output | At part load heat output | Standby mode | Electric power consumption | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| At nominal heat output | At part load heat output | Standby mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Electric power consumption | N/A | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sustainable use of natural resources <table border="1"> <thead> <tr> <th>Environmental sustainability</th> </tr> </thead> <tbody> <tr> <td>NPD</td> </tr> </tbody> </table> | | | Environmental sustainability | NPD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Environmental sustainability | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Signed for and on behalf of the manufacturer by:</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Danny Baijens, CEO |  | Bladel, The Netherlands 08 July 2025 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

2 The Clean Air Act 1993 and Smoke Control Areas

The following Barbas BOX 35 35 70 appliances have been exempted or recommended for exemption under section 21 of the Clean Air Act 1993 and can be used in accordance with the intended use as described in this manual in smoke control areas in the UK.

- Barbas BOX 35 35 70
- Barbas BOX 35 35 70 with support frame

The appliances incorporate a factory-fitted modified air control.

Under the Clean Air Act local authorities may declare the whole or part of the district of the authority to be a smoke control area. It is an offence to emit smoke from a chimney of a building, from a furnace or from any fixed boiler if located in a designated smoke control area. It is also an offence to acquire an "unauthorised fuel" for use within a smoke control area unless it is used in an "exempt" appliance ("exempted" from the controls which generally apply in the smoke control area).

In England appliances are exempted by publication on a list by the Secretary of State in accordance with changes made to sections 20 and 21 of the Clean Air Act 1993 by section 15 of the Deregulation Act 2015. In Scotland appliances are exempted by publication on a list by Scottish Ministers under section 50 of the Regulatory Reform (Scotland) Act 2014. Similarly, In Northern Ireland appliances are exempted by publication on a list by the Department of Agriculture, Environment and Rural Affairs under Section 16 of the Environmental Better regulation Act (Northern Ireland) 2016. In Wales appliances are exempted by regulations made by Welsh Ministers.

Further information on the requirements of the Clean Air Act can be found here: <https://www.gov.uk/smoke-control-area-rules> .

Your local authority is responsible for implementing the Clean Air Act 1993 including designation and supervision of smoke control areas and you can contact them for details of the Clean Air Act requirements.

3 About this document

This document shows the necessary information to do these tasks on the BOX 35 35 70:

- Operate the appliance
- Do basic maintenance

This document refers to the BOX 35 35 70 as 'the appliance'. This document is an essential part of your appliance. Read it carefully before you do work on the appliance. Keep it in a safe place.

The original instructions of the document are in English. All other language versions of the document are translations of the original instructions. It is not always possible to provide a detailed illustration of every single item of the equipment. The illustrations in this document show a typical setup. The illustrations are for instructional use only.

3.1 How to work with this document

1. Make yourself familiar with the structure and content of the document.
2. Read the safety section in detail.
3. Make sure that you understand all the instructions.
4. Do the procedures completely and in the given sequence.

3.2 Warnings and cautions used in this document

Warning

If you do not obey these instructions, there is a risk that can cause personal injury or death.

Caution

If you do not obey these instructions, there is a risk of damage to the appliance, installation or to property.

Note

A note shows more information.


| Symbol | Description |
|---|------------------------------------|
|  | Visual sign that there is a hazard |
|  | Visual sign that there is a notice |

3.3 Related documentation

- Installation and maintenance manual
- User manual

4 Description

4.1 Overview of the front of the appliance

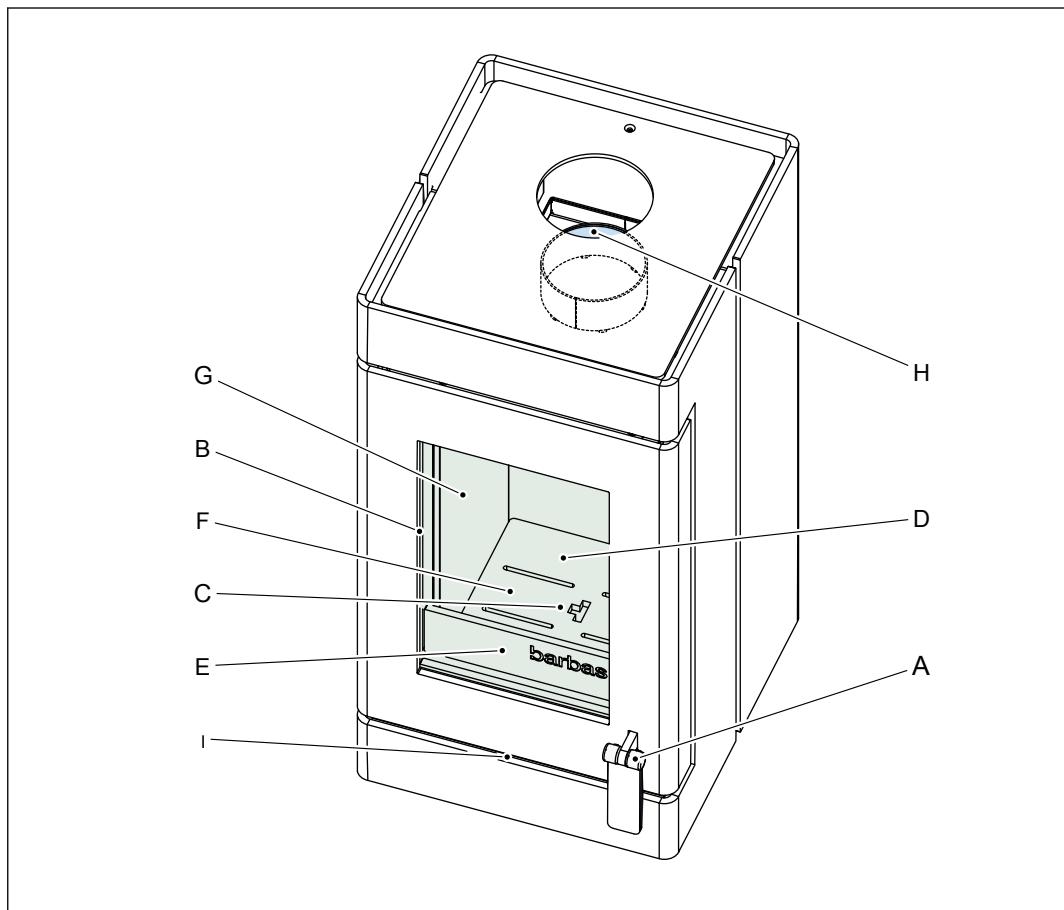

| | | | |
|---|-------------------|---|---|
| A | Door handle | F | Ash tray (under the grate) |
| B | Glass | G | Combustion chamber panels |
| C | Primary air inlet | H | Flue connection |
| D | Grate | I | Steel base |
| E | Log guard | J | Control lever (not visible on the figure) |

4.2**Intended use**

The appliance is intended for indoor use to heat the room wherein it is installed. Do not use it for other purposes.

It is not allowed to use the appliance as primary heating appliance.

The appliance is intended for use with wood logs or wood briquettes as fuel. Do not use other fuels and waste.

The appliance is intended for use with the door closed.

The appliance may only be used at the location that meets the requirements for the installation of the appliance.

The appliance is intended for intermittent use and is not intended for continuous use.

It is not allowed to connect the appliance on a shared flue gas channel.

The appliance is intended to heat the room by direct heating. It is not allowed to connect the appliance to a central-heating installation.

5 Safety

5.1 Safety instructions for operation

Warning:



- Do not put objects on the top of the appliance.
- Do not let the appliance unattended when the fuel burns.
- Do not put flammable items within 100 cm from the front of the appliance.
- Do not put flammable items within 25 cm from the side of the appliance.
- If applicable, make sure the distance between the top of the wood log storage module and the wood logs in the storage module is minimum 10 cm. Make sure the wood logs in the storage do not touch the top of the wood log storage module.
- Do not use mineral fuel (example: coal, anthracite)
- Do not use liquid fuels.
- Do not use gasoline-type lantern fuel, kerosene, gasoline, kerosene, charcoal lighter fluid, alcohol, or similar liquids to start or re-ignite a fire in the appliance. Make sure to keep these liquids away from the appliance.
- Do not use the appliance with the door open. Smoke can escape from the appliance. Only open the appliance door for a short time to reload with fuel or to remove the ash.
- Make sure that children are supervised when they can reach the appliance.
- Make sure that there is sufficient ventilation in the room in which the appliance is installed.
- Do not use the appliance in case of visual glass damage.
- Do not use the appliance in case of damage of the door gaskets
- Make sure that the appliance is installed correctly. Refer to the Installation and Maintenance manual. You can find the manuals on www.barbasbellfires.com.
- The simultaneous use of an extractor fan (e.g. a cooker hood), can cause smoke escape from the appliance, when the appliance door is open.
- Wear the glove and use the operating hook or a poker when refilling the appliance
- Make sure that your clothing does not touch the appliance. Especially synthetic clothing ignites easily and burns intensely.
- Do not use the appliance when there is fog, haze or no wind.
- Do not make modifications to the appliance. Any modification will also make your warranty invalid.

Caution:

- Operation with the air control or appliance dampers open can cause excess smoke. The appliance must not be operated with air controls, appliance dampers or door left open except as directed in these instructions.
- Make sure to clean your chimney minimum every year to prevent a chimney fire.
- Do not use freshly cut wood.
- Do not use more wood per load than prescribed. Refer to section [6.2](#) for the recommended fuel amount.
- Do not burn waste in the appliance.
- Do not prepare food in the appliance. This causes damage to your appliance and chimney.

Note:

- Do inspect and clean the appliance, the chimney and the external combustion air supply by a Barbas dealer minimum every year.
- Do not use the appliance continuously. The intended use is as intermittent appliance.

5.2 Safety instructions with regard to the environment

- Dispose of the packing materials in an environmentally friendly way.
- Dispose of ceramic heat-resistant glass as household waste. Do not dispose of ceramic heat-resistant glass in a glass recycling container.
- Dispose of an obsolete appliance according to instructions of the authorities or the fitter.
- Obey the local regulations.

6 Fuel

6.1 Fuel types

Warning:



Do not use coal, anthracite, coal briquettes, liquid fuel or gel fuel. The appliance is not designed for these fuels. Use of these fuels is dangerous and can lead to bodily harm and to serious damage to the appliance.

Suitable fuels are:

- Hard wood (example: birch, beech, oak, ash).
- Soft wood (example: spruce, pine, poplar).
- Wood briquettes without binder.

Before use, wood must dry for minimum 2 years when freshly chopped. Kiln-dried wood must dry for an extra half year. Dried wood logs must have a moisture content of 10 - 20 %.

Unsuitable fuels are:

- Painted wood.
- Impregnated wood.
- MDF, chipboard.
- Any kind of combustible waste.
- Paraffin impregnated compressed wood logs
- Freshly chopped wood
- Coal, anthracite and other bituminous fuels
- Lignite , peat

Using unsuitable fuels cause excess smoke, black glass, combustible deposits in the chimney and can damage the appliance.

6.2 Fuel amount

Load the appliance with the amount of fuel as listed hereunder. For the amount of fuel for the first load see section [7.3.1](#) .

Caution:



The amount of fuel specified here should not be exceeded, overloading can cause excess smoke.

| | Wood logs | Wood briquettes |
|--------|---------------------------------|--------------------------------|
| Amount | 1 piece | 1 piece |
| Weight | Approximately 0.75 kg per piece | Approximately 0.7 kg per piece |
| Length | Approximately 15 cm | Approximately 15 cm |

The above listed amount burns for approximately 45 minutes. This time can be different, dependent on the chimney draught and the position of the combustion air valve.

7 Operation

7.1 Preparation before first use

Report any defects to your dealer immediately.

1. Make sure that the appliance is not damaged.
2. Make sure that the glass is not damaged.
3. Make sure that the door opens and closes completely.
4. Remove document and components from the combustion chamber.
5. Make sure that the control lever moves easy.
6. Make sure that the ash tray is empty.
7. Make sure that all package material, stickers, etc, has been removed from the vicinity of the appliance after installation.

7.2 First use of the appliance

Caution:



Make sure there is sufficient ventilation in the room in which the appliance is installed.

Note:



The appliance has a heat-resistant coating. When you use the appliance for the first time, the coating can cause an unpleasant, but harmless smell.

After first few times of use of the appliance, a light deposit on the inside of the glass may occur caused by curing of the paint. This can be removed with glass cleaner or ceramic hob cleaner.

7.3 Firing the appliance

7.3.1 First load and ignition

At the beginning the appliance and chimney are cold. It is important that both the appliance and chimney reach a temperature that guarantees a good functioning of the appliance. A too low temperature results in incomplete combustion and a poor chimney draught. To avoid this do the following:


Warning:




Do not use the appliance when there is fog or haze or no wind.

1. Put the control lever in the far right position.
2. When, present, open the valve in the external combustion air supply line.
3. When present, open the chimney valve completely.
4. Open the door of the appliance.


5. Put 2 wood logs on the floor of the combustion chamber.

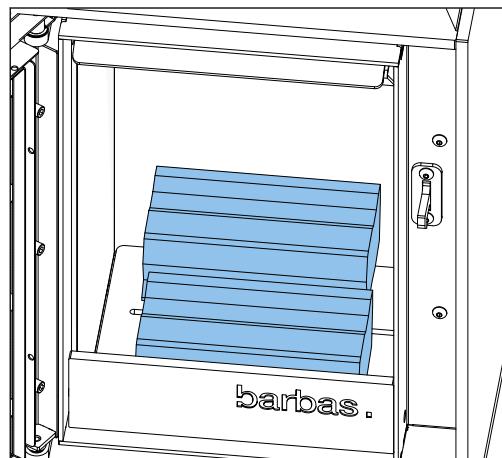

6. Put 2 wood logs on top of the wood logs.

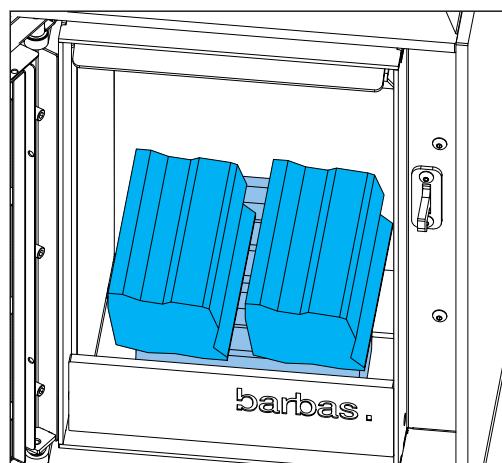

7. Put some kindling wood and a fire starter cube above the wood logs.

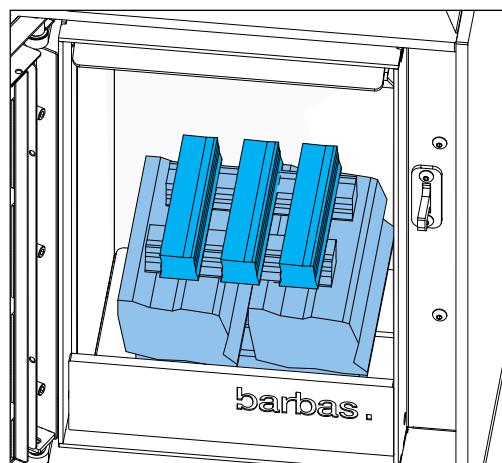

8. Light the firestarter cube with a lighter or a match.
9. Close the door of the appliance.

After approximately 20 minutes the wood logs burn. Dependent on the quality of the chimney the wood logs burn for approximately 1 hour. Do not open the door of the appliance before the last flames have almost disappeared.

7.3.2 Reload with fuel

Caution:




If there is insufficient burning material in the firebed to light a new fuel charge, excessive smoke emission can occur. Refueling must be done onto a sufficient quantity of glowing embers and ash to make sure that the new fuel charge will ignite in a reasonable period. If there are too few embers in the fire bed, add suitable kindling to prevent excessive smoke.



Note:

The procedure hereunder is a general description. The best reloading moment is dependent on the flue draught. A high flue draught requires reloading when the flames have completely disappeared. If the flue draught is low, reloading must be done when there are still flames.

1. Wait until the last flames have almost disappeared.
2. Set the control lever in the far right position.
3. Open the door.
4. Reload the appliance with the recommended amount of fuel. Refer to section [6.2](#).

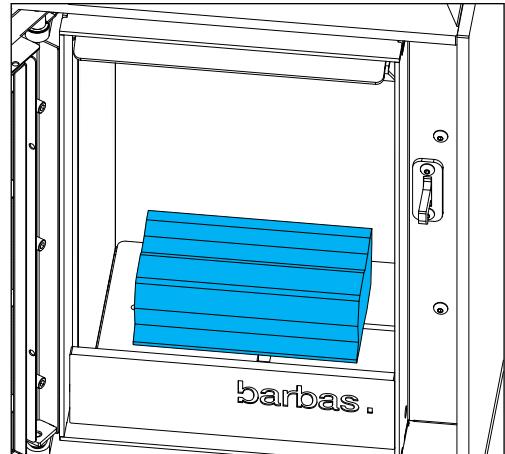

5. Close the door.
6. After ignition of the fuel, move the control lever to a position that gives a quiet burning fire.

7.3.3 Control the burn process

Control the burn process with the control lever. This lever controls the amount of primary combustion air and both the secondary combustion air and airwash amount.

Warning:




Setting the control lever in the far left position (all air inlets closed) when the fuel is burning leads to excessive emission of hazardous gasses (example: carbon monoxide) and soot deposit on the glass of the door and in the chimney. Never close the air inlets when the fuel is burning. Always keep the secondary air inlet and air wash inlet open by setting the control lever somewhere in-between the center position and the far left position.

Caution:



Continuous firing with the primary air inlet fully open (control lever in the far right position) causes a white-hot fire that can damage the appliance. Use the primary air only during the first fuel load and for ignition of a new fuel load.

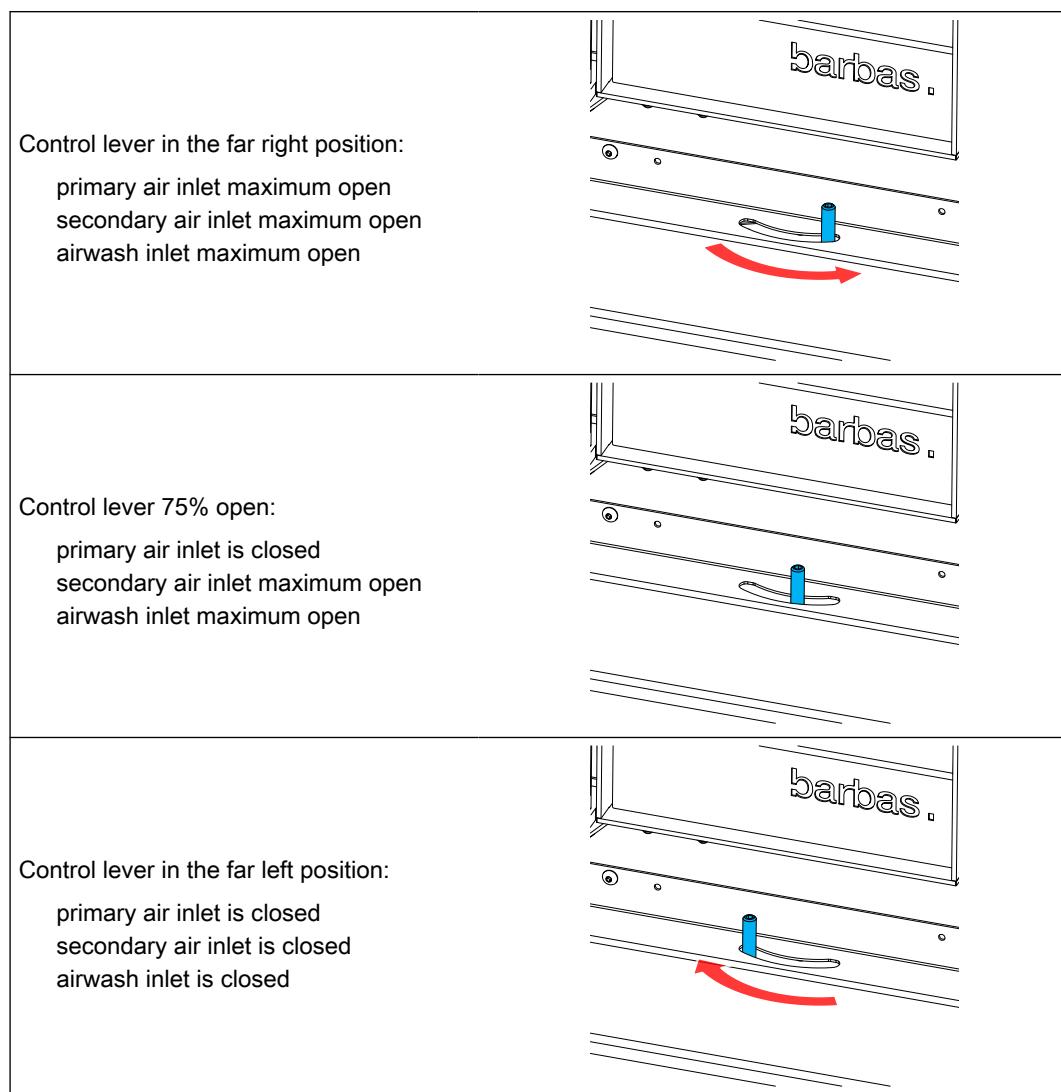

7.3.4 General firing tips

- The appliance works best when it has been heated up as described in section 7.3.1. Insufficient heating up leads to a low chimney draught, black deposits on the glass and incomplete combustion. Good combustion is recognized by bright orange flames, invisible smoke and no soot deposits on the glass. Use the control lever to get good combustion. Refer to section 6.1 for advice on the required fuel quality.
- Make sure the door of the appliance is closed when in use. Only open the door for ignition and to refuel.
- Do not remove all the ashes. An ash layer in the combustion chamber forms a heat insulating layer, that helps the fuel to ignite easy.
- Do not set the control lever in the far left position (all combustion air inlets closed) when the appliance is used. This will cause severe smoke development, soot formation and increases the chance of a chimney fire.
- After the first load, do not overload the appliance with fuel. Refer to section 6.2 for the recommended amount of fuel. Too much fuel leads to incomplete combustion, soot formation and a chance of a chimney fire.
- When the appliance is not in use and completely cooled down, put the control lever in the far left position to close the combustion air supply.

8 Maintenance

8.1 Maintenance schedule

Caution:



Clean the glass when it is dirty. If the glass is not cleaned when it is dirty the glass can become permanently dull.

| Task | Frequency | Procedure |
|----------------------------|---------------------------------------|--|
| Remove the ashes | When necessary | Refer to section 8.2 |
| Clean the glass | When necessary | Refer to section 8.3 |
| Maintenance by your fitter | Yearly | Refer to your dealer |
| Chimney sweep | Yearly (or more often when necessary) | Refer to the Installation and maintenance manual |
| Appliance inspection | Yearly | Refer to the Installation and maintenance manual |

8.2 Remove the ashes

1. Make sure that the appliance has cooled down and there are no glowing embers.
2. Remove the ashes with a small scoop.
3. Lift the grate with the operating hook and remove the grate.
4. Remove the ashtray and empty it.
5. Make sure there are no ashes in the space under the ash tray. Remove these ashes when necessary.
6. Put the ash tray back in the appliance.
7. Put the grate back in the appliance.

8.3 Clean the glass

1. Make sure the appliance has cooled down and there are no glowing embers in the combustion chamber.
2. To avoid any up swirl of ashes during cleaning, remove the ashes from the appliance.
3. Clean the glass on both sides with a soft cloth, a sponge or paper. Use glass cleaner or ceramic hob cleaner.
4. Make sure that the glass is dry. Water droplets can leave a mark on the glass.



Note:

Damaged or broken glass must be replaced before the appliance can be used again.

9 Troubleshooting

| Problem | Possible cause | Possible solution |
|---|---|--|
| Chimney fire (recognized by a roaring sound in the chimney) | Ignition of soot and tar deposits in the chimney. | <ul style="list-style-type: none">Set the control lever in the far left position.Call the emergency services. (112)Put out the fire in the appliance with sand. <p>Warning:</p>  <p>Never use water to put out the fire.</p> |
| The wood logs do not ignite | The moisture content of the wood logs is too high | <ul style="list-style-type: none">Use dried wood logs with a moisture content of 10 - 20 %.Use wood briquettes |
| | The combustion chamber is not warm enough | <ul style="list-style-type: none">Do the recommended ignition procedure. Refer to section 7.3.1.Use the recommended amount of fuel. Refer to section 6.2. |
| The wood logs burn too fast | Primary air inlet is open. | Close the primary air supply. Adjust the amount of secondary air and air wash with the control lever. Refer to section 7.3.3 . |
| | The chimney draught is too high | <ul style="list-style-type: none">Reduce the amount of secondary air and airwash with the control lever. Refer to section 7.3.3Contact your installer. |
| The temperature of the room does not rise sufficient | The fuel amount is too low | Use the recommended amount of fuel. Refer to section 6.2 . |
| | The chimney draught is too high | Contact your installer. |
| Excessive smoke escapes when the door of the combustion chamber is open | The chimney draught is too low | <ul style="list-style-type: none">Do the recommended ignition procedure. Refer to section 7.3.1.Contact your installer. |

| Problem | Possible cause | Possible solution |
|---|---|---|
| The glass becomes black | The combustion chamber is not hot enough | <ul style="list-style-type: none"> • Use the recommended amount of fuel. Refer to section 6.2. • Increase the amount of combustion air with the control lever. Refer to section 7.3.3. • Put the wood logs diagonally and as wide as possible on the combustion chamber floor. |
| | The moisture content of the wood logs is too high | <ul style="list-style-type: none"> • Use dried wood logs with a moisture content of 10 - 20 %. • Use wood briquettes |
| | The seal around the door is damaged | Contact your dealer. |
| Some cold air flows out from the front of the appliance when the appliance is not in use. | The valve in the external combustion air supply line is missing or is open. | Close the valve in the external combustion air supply line. |
| | The underpressure in the installation room is too high | Reduce the underpressure, for example by opening a ventilation opening in the installation room. |

10**Information on disposal of the appliance**

- Dispose of an obsolete appliance according to instructions of the authorities or the installer.
- The information in this section is informative. Always obey the national and local regulations on recycling and disposal of the appliance or parts of the appliance.
- Before disassembly and disposal of the appliance, remove ashes and unburnt fuel from the appliance. Dispose ashes as rest waste. Do not dispose ashes as organic waste.

| Appliance component | Material | Disassembly | Recycling / Disposal |
|---------------------------------------|----------------------------|---|--|
| Combustion chamber (walls and baffle) | Vermiculite | Refer to the Installation Manual | Vermiculite in contact with combustion gases cannot be re-used or recycled. Dispose as rest waste. |
| Combustion chamber (walls and baffle) | Heat resistant ceramic | Refer to the Installation Manual | Ceramic in contact with combustion gases cannot be re-used or recycled. Dispose as rest waste. |
| Combustion chamber (grate) | Steel | Refer to the Installation Manual | Dispose as metal waste |
| Glass | Ceramic glass | Remove glass holder with suitable tools. Remove gaskets and cord from the glass | Dispose as rest waste or ceramic waste. Do not dispose as glass waste. |
| Appliance body | Steel | Make sure to remove all components other than metal | Dispose as metal waste |
| Ash tray | Steel | Remove from appliance | Dispose as metal waste |
| Gaskets | Glass fibre cord or plates | Remove from appliance and components | Dispose as glass fibre (non-flammable waste) |

11 Technical data

11.1 Technical data

| | | |
|---|---|--------------------------|
| Name | Barbas | |
| Model | • BOX 35 35 70 • BOX 35 35 70 with support frame | |
| EPREL registration number | 2393794 | |
| Tested in accordance with | EN16510-2-1 | |
| Energy efficiency index | 102 | |
| Energy efficiency class | A | |
| Fuel | Wood logs, Wood briquettes | |
| Indirect heating function | No | |
| Room sealed | Yes | |
| Leak rate at 10 Pa | < 3 m ³ /h (at 273 K, 1013 hPa) | |
| Seasonal efficiency | 66.9 % | |
| | At nominal heat output | At part load heat output |
| Fuel load | 0.8 kg | 0.6 kg |
| Heat output (net) | 3.8 kW | 2.8 kW |
| Useful efficiency | 76.9 % | 77.6 % |
| Emissions (at 13 % O₂, 273 K, 1013 hPa) | | |
| • carbon monoxide (CO) | 1040 mg/Nm ³ | 1949 mg/Nm ³ |
| • particles (PM) | 33 mg/Nm ³ | 30 mg/Nm ³ |
| • organic gaseous compounds (OGC) | 59 mg/Nm ³ | 132 mg/Nm ³ |
| • nitrogen oxides (NO _x) | 102 mg/Nm ³ | 117 mg/Nm ³ |
| Flue gas mass flow | 4.3 g/s | 3.7 g/s |
| Flue gas outlet temperature | 312 °C | 259 °C |
| Flue gas temperature | 260 °C | 216 °C |
| Minimum chimney draught | 12 Pa | 8 Pa |
| Minimum temperature class of the chimney | T 400 | |
| Flue gas connection | Outer diameter 98 mm, suitable for a pipe with an inner diameter of 100 mm | |
| External combustion air connection | 80 mm | |
| Weight | | |
| • BOX 35 35 70 | • 113 kg | |
| • BOX 35 35 70 with support frame | • 125 kg | |
| Minimum distance to flammable materials | Refer to the installation manual for minimum distances to flammable materials | |
| Used materials | | |


| | |
|---|---|
| • Combustion chamber side and back panels | Vermiculite 750 kg/m ³ |
| • Combustion floor and grate | Steel |
| • Lower baffle | Vermiculite 750 kg/m ³ |
| • Upper baffle | Vermiculite 750 kg/m ³ |
| • Front glass | Heat resistant ceramic glass |
| The specific precautions that shall be taken when the local space heater is assembled, installed or maintained, are listed in the attached documents: | <ul style="list-style-type: none">• Installation and maintenance manual• User manual |
| Maximum capacity to carry a chimney | 120 kg *) |

| Additional information in order to achieve relevant test results for market surveillance | |
|--|------------------------|
| Mass of basic fire bed | 120 g |
| Criterion for the end of the test cycle | 5 vol% CO ₂ |

*) if the weight of the chimney or part of the chimney, being carried by the appliance, is more than indicated, the chimney must be supported with a wall bracket.

11.2

Product information according regulation (EU) 2015/1185

| Model identifier | BOX 35 35 70 | | | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------|---|------------------------|---|--|-------|---|---------------------|-----------------|------|-----|--|--|--|--|--|--|--|--|--|--|--|
| Equivalent models | BOX 35 35 70 with support frame | | | | | | | | | | | | | | | | | | | | | |
| Indirect heating function | No | | | | | | | | | | | | | | | | | | | | | |
| Direct heat output | 3.8 kW | | | | | | | | | | | | | | | | | | | | | |
| Indirect heat output | - kW | | | | | | | | | | | | | | | | | | | | | |
| Fuel | | Preferred fuel (only one) | Other suitable fuel(s) | Emissions at nominal heat output (*) [mg/Nm ³ (13 % O ₂)] | | | Emissions at minimum heat output (*) [mg/Nm ³ (13 % O ₂)] | | | | | | | | | | | | | | | |
| | | PM | OGC | CO | NO _x | PM | OGC | CO | NO _x | | | | | | | | | | | | | |
| Wood logs, moisture content < 25 % | | yes | no | 33 | 59 | 1040 | 102 | 30 | 132 | 1949 | 117 | | | | | | | | | | | |
| Compressed wood, moisture content < 12 % | | no | no | | | | | | | | | | | | | | | | | | | |
| Other woody biomass | | no | no | | | | | | | | | | | | | | | | | | | |
| Non-woody biomass | | no | no | | | | | | | | | | | | | | | | | | | |
| Anthracite and dry steam coal | | no | no | | | | | | | | | | | | | | | | | | | |
| Hard coke | | no | no | | | | | | | | | | | | | | | | | | | |
| Low temperature coke | | no | no | | | | | | | | | | | | | | | | | | | |
| Bituminous coal | | no | no | | | | | | | | | | | | | | | | | | | |
| Lignite briquettes | | no | no | | | | | | | | | | | | | | | | | | | |
| Peat briquettes | | no | no | | | | | | | | | | | | | | | | | | | |
| Blended fossil fuel briquettes | | no | no | | | | | | | | | | | | | | | | | | | |
| Other fossil fuel | | no | no | | | | | | | | | | | | | | | | | | | |
| Blended biomass and fossil fuel briquettes | | no | no | | | | | | | | | | | | | | | | | | | |
| Other blend of biomass and solid fuel | | no | no | | | | | | | | | | | | | | | | | | | |
| Characteristics when operating with the preferred fuel | | | | | | | | | | | | | | | | | | | | | | |
| Seasonal space heating efficiency η _s [%] | | 67 | | | | | | | | | | | | | | | | | | | | |
| Energy efficiency index (EEI) | | 102 | | | | | | | | | | | | | | | | | | | | |
| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit | | | | | | | | | | | | | | | |
| Heat output | | | | | | | | | | | | | | | | | | | | | | |
| Nominal heat output | | P _{nom} | 3.8 | kW | Useful efficiency at nominal heat output | | | η _{th,nom} | 76.9 | % | | | | | | | | | | | | |
| Minimum heat output (indicative) | | P _{min} | 2.8 | kW | Useful efficiency at minimum heat output (indicative) | | | η _{th,min} | 77.6 | % | | | | | | | | | | | | |
| Auxiliary power consumption | | | | Type of heat output/room temperature control (select one) | | | | | | | | | | | | | | | | | | |
| At nominal heat output | el _{max} | N.A. | kW | Single-stage heat output, no room temperature control | | | | | | | | yes | | | | | | | | | | |
| At minimum heat output | el _{min} | N.A. | kW | Two or more manual stages, no room temperature control | | | | | | | | no | | | | | | | | | | |
| In standby mode | el _{SB} | N.A. | kW | With mechanic thermostat room temperature control | | | | | | | | no | | | | | | | | | | |
| Permanent pilot flame power requirement | | | | | | | | | | | | no | | | | | | | | | | |
| Pilot flame power requirement (if applicable) | | P _{pilot} | N.A. | kW | With electronic room temperature control | | | | | | | | | | | | | | | | | |
| | | | | | With electronic room temperature control plus day timer | | | | | | | | | | | | | | | | | |
| | | | | | With electronic room temperature control plus week timer | | | | | | | | | | | | | | | | | |
| Other control options (multiple selection possible) | | | | | | | | | | | | | | | | | | | | | | |
| Room temperature control, with presence detection | | | | | | | | | | | | no | | | | | | | | | | |
| Room temperature control, with open window detection | | | | | | | | | | | | no | | | | | | | | | | |
| With distance control option | | | | | | | | | | | | no | | | | | | | | | | |
| Contact details | | Barbas Bellfires BV Hallenstraat 17 5531 AB BLADEL The Netherlands | | | | | www.barbas.com | | | | | | | | | | | | | | | |
| (*) PM = particulate matter, OGC = organic gaseous compounds, CO = carbon monoxide, NO _x = nitrogen oxides | | | | | | | | | | | | | | | | | | | | | | |
| (**) Only required if correction factors F(2) or F(3) are applied. | | | | | | | | | | | | | | | | | | | | | | |
| Signed for and on behalf of the manufacturer by: Danny Baijens, CEO Bladel; 19 June 2025 | | | | | | | | | | | |  | | | | | | | | | | |

11.3

Explanation of used notations on typeshield

| Notation | Description |
|---|---|
| m_{chim} | The maximum weight of a chimney the appliance may carry |
| d_B | The minimum distances below the bottom to combustible material |
| d_F | The minimum distances from the front to combustible material in the bottom front radiation area |
| d_C | The minimum distances from the top to combustible material |
| d_R | The minimum distances from the rear to combustible material |
| d_S | The minimum distances from the sides to combustible material |
| d_L | The minimum distances from the front to combustible material in the side front radiation area |
| d_P | The minimum distances from the front to combustible material |
| CO_{nom} | Carbon monoxide emission at nominal heat output |
| $\text{NO}_{x\text{nom}}$ | Nitrogen oxide emission at nominal heat output |
| OGC_{nom} | Hydrocarbons emission at nominal heat output |
| PM_{nom} | Particleemission at nominal heat output |
| CO_{part} | Carbon monoxide emission at part load heat output |
| $\text{NO}_{x\text{part}}$ | Nitrogen oxide emission at part load heat output |
| OGC_{part} | Hydrocarbons emission at part load heat output |
| PM_{part} | Particle emission at part load output |
| $T_{s\text{nom}}$ | The flue gas outlet temperature at nominal heat output |
| p_{nom} | Minimum flue draught at nominal heat output |
| $\Phi_{f,g \text{ nom}}$ | The flue gas mass flow at nominal heat output |
| $T_{s\text{part}}$ | The flue gas outlet temperature at part load heat output |
| p_{part} | Minimum flue draught at part load heat output |
| $\Phi_{f,g \text{ part}}$ | The flue gas mass flow at part load heat output |
| T_{class} | Temperature designation of the chimney |
| P_{nom} | The nominal heat output |
| η_{nom} | The appliance efficiency at nominal heat output |
| P_{part} | The part load heat output |
| η_{part} | The appliance efficiency at part load heat output |
| η_s | The appliance seasonal space heating efficiency at nominal heat output |
| EEI | The energy efficiency index |
| E_{class} | The energy efficiency class |
| INT | The appliance is capable of intermittent operation |
| CM | Room-sealed appliance with a manually closed and locked door |
| B | Non-room-sealed appliance |
|  | Read and follow the user operating instructions |

12**Warranty Terms**

To make a claim under the warranty, it is important to register the Barbas appliance after purchase via www.barbas.com.

Barbas Warranty Terms

Barbas B.V. guarantees the quality of the supplied Barbas appliance and the quality of the materials used. All Barbas appliances are developed and manufactured according to the highest possible quality standards. If, despite all this, something should prove amiss with the Barbas appliance you have purchased, Barbas B.V. offers the following manufacturer's warranty.

Article 1: Warranty

1. If Barbas B.V. determines that the Barbas appliance you have purchased is defective as a result of a flaw in the construction or material, Barbas B.V. guarantees to repair or replace the appliance free of charge, without charging any costs for labor or spare parts.
2. Repair or replacement of the Barbas appliance will be undertaken by Barbas B.V. or by a Barbas dealer as designated by Barbas B.V.
3. This warranty is supplementary to the existing legal national warranty of Barbas dealers and Barbas B.V. in the country of purchase and is not intended to restrict your rights and claims based on the applicable legal provisions.

Article 2: Warranty conditions

1. Should you wish to claim under the warranty, please contact your Barbas dealer.
2. Complaints should be reported as quickly as possible after they have manifested themselves.
3. Complaints will only be accepted if they are reported to the Barbas dealer, together with the serial number of the Barbas appliance which is stated on the enclosed documents.
4. In addition, the original receipt (invoice, receipt, cash receipt) showing the date of purchase must also be submitted.
5. Repairs and replacements during the warranty period do not give any entitlement to an extension of the warranty period. After a repair or replacement of warranty parts, the warranty period shall be deemed to have started on the date of purchasing the Barbas appliance.
6. If a certain part is eligible for the warranty and the original part is no longer available, Barbas B.V. shall ensure that an alternative part of at least the same quality shall be provided.

Article 3: Warranty exclusions

1. The warranty on the Barbas appliance ceases to be in effect if:
 - a. it is not installed according to the installation instructions, and to national and/or local regulations;
 - b. it has been installed, connected or repaired by a non-Barbas dealer;
 - c. it has not been used or maintained according to the instructions for use;

- d. it has been changed, neglected or roughly treated;
- e. it has been damaged as a result of external causes (outside the appliance itself), for example, lightning strike, water damage or fire;
- 2. In addition, the warranty lapses if the original purchase receipt shows any change, deletion, removal or if it is illegible.

Article 4: Warranty area

- 1. The warranty is only valid in those countries where Barbas appliances are sold through an official dealer network.

Article 5: Warranty period

- 1. This warranty will only be granted during the warranty period.
- 2. The body of the Barbas appliance is guaranteed for a period of 10 years against construction and/or material faults, starting from the moment of purchase.
- 3. For other parts of the Barbas appliance, a similar warranty applies from the moment of purchase for a period of two years.
- 4. For user parts such as glass, glass sealing cord and the interior of the combustion chamber, a similar guarantee is given until after the first burning.

Article 6: Liability

- 1. A claim granted by Barbas B.V. under this warranty does not automatically imply that Barbas B.V. also accepts liability for any possible damage. The liability of Barbas B.V. never extends further than that stated in these warranty conditions. Any liability of Barbas B.V. for consequential damage is expressly excluded.
- 2. That stated in this provision is not valid if and to the extent that it derives from a mandatory provision.
- 3. All agreements entered into by Barbas B.V. are, unless specifically stated otherwise in writing and to the extent that they are permitted based on applicable law, subject to the FME-CWM general sales and delivery conditions for the technology industry.

Barbas B.V.

Hallenstraat 17

5531 AB Bladel

The Netherlands

Email: info@Barbas.com

Carefully retain the enclosed documents; they show the serial number of the appliance. You will need this if you wish to claim under the warranty.

barbas .

Your Barbas dealer

21.08.2025 - 357662 - 573-001