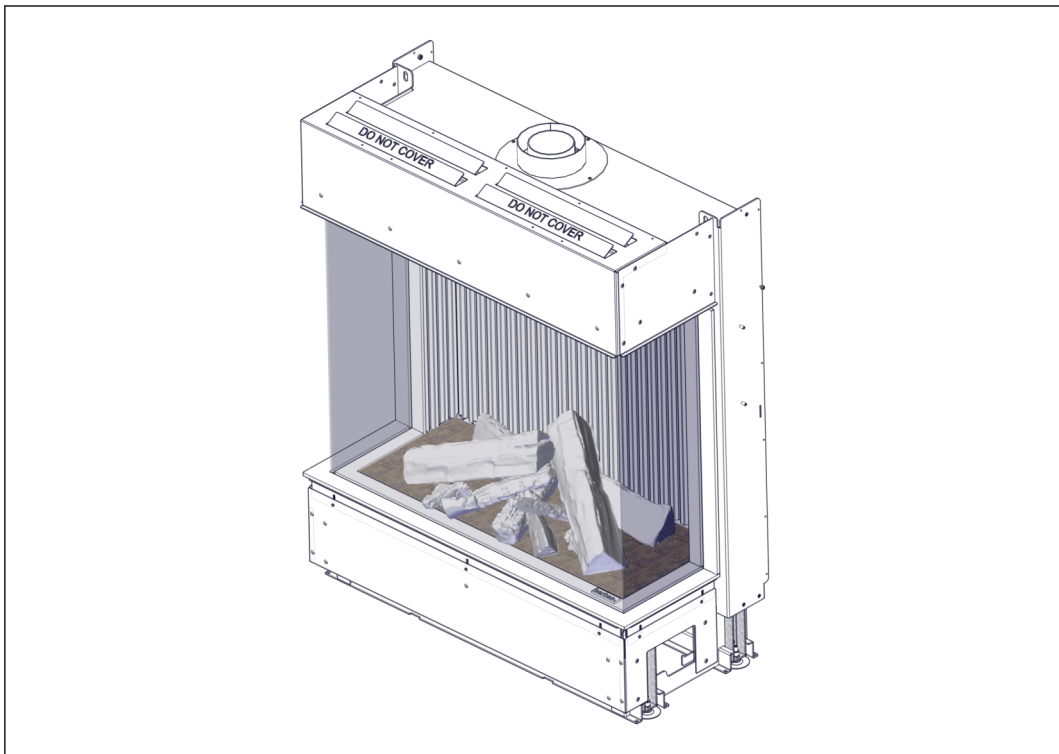


# barbas .

## Preparation manual

Gas Fire Panorama 90-70 PF2



Serial number:

Production date:

**© Barbas Bellfires BV**

This document or parts thereof may not be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, nor otherwise, without the prior written permission of Barbas Bellfires BV. This document could contain technical inaccuracies or typographical errors. Barbas Bellfires BV reserves the right to revise this document from time to time in the contents thereof.

**Contact information**

Barbas Bellfires BV

Hallenstraat 17, 5531 AB Bladel, The Netherlands

E-mail: [info@barbas.com](mailto:info@barbas.com)

[www.barbasbellfires.com](http://www.barbasbellfires.com)

## Contents

|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>About this document.....</b>                                         | <b>5</b>  |
| 1.1      | How to work with this document.....                                     | 5         |
| 1.2      | Warnings and cautions used in this document.....                        | 5         |
| 1.3      | Related documentation.....                                              | 5         |
| <b>2</b> | <b>Overview of the concentric flue system.....</b>                      | <b>6</b>  |
| <b>3</b> | <b>Safety.....</b>                                                      | <b>7</b>  |
| 3.1      | Safety instructions for installation.....                               | 7         |
| <b>4</b> | <b>Requirements.....</b>                                                | <b>8</b>  |
| 4.1      | Requirements on the location.....                                       | 8         |
| 4.2      | Requirements on the convection package (option).....                    | 8         |
| 4.3      | Other requirements.....                                                 | 8         |
| 4.4      | Requirements on the roof and wall outlet.....                           | 9         |
| 4.5      | Requirements on the concentric flue system.....                         | 11        |
| 4.5.1    | Possibilities for a concentric flue system with a roof outlet.....      | 12        |
| 4.5.2    | Possibilities for a concentric flue system with a wall outlet.....      | 18        |
| <b>5</b> | <b>Technical specification.....</b>                                     | <b>23</b> |
| 5.1      | Gas Fire Panorama 90-70 PF2 Frameless.....                              | 23        |
| 5.2      | Gas Fire Panorama 90-70 PF2 Frameless with convection casing.....       | 24        |
| 5.3      | Gas Fire Panorama 90-70 PF2 with 4 cm frame.....                        | 25        |
| 5.4      | Gas Fire Panorama 90-70 PF2 with 4 cm frame and convection casing.....  | 26        |
| 5.5      | Gas Fire Panorama 90-70 PF2 with 6 cm frame.....                        | 27        |
| 5.6      | Gas Fire Panorama 90-70 PF2 with 6 cm frame and convection casing.....  | 28        |
| 5.7      | Gas Fire Panorama 90-70 PF2 with 10 cm frame.....                       | 29        |
| 5.8      | Gas Fire Panorama 90-70 PF2 with 10 cm frame and convection casing..... | 30        |
| 5.9      | Gas Fire Panorama 90-70 PF2 with 10 cm frame and adjustable legs.....   | 31        |
| 5.10     | Operating unit.....                                                     | 32        |
| 5.11     | Dimensions of the restriction plate.....                                | 32        |

|          |                                                                                   |           |
|----------|-----------------------------------------------------------------------------------|-----------|
| <b>6</b> | <b>Available components for the concentric flue system - natural draught.....</b> | <b>33</b> |
| 6.1      | Appliance part list.....                                                          | 33        |
| 6.2      | Barbas - Muelink & Grol system Ø100 - Ø150.....                                   | 34        |
| 6.3      | Barbas - Muelink & Grol system Ø130 - Ø200.....                                   | 40        |
| 6.4      | Poujoulat - DUOGAS system Ø100 - Ø150.....                                        | 44        |
| 6.5      | Poujoulat - DUOGAS system Ø130 - Ø200.....                                        | 47        |
| 6.6      | Ontop - Metaloterm US system Ø100 - Ø150.....                                     | 49        |
| 6.7      | Ontop - Metaloterm US system Ø130 - Ø200.....                                     | 53        |
| 6.8      | Jeremias/STB - H-Twin system Ø100 - Ø150.....                                     | 58        |
| 6.9      | Jeremias/STB - H-Twin system Ø130 - Ø200.....                                     | 62        |
| 6.10     | Jeremias - TWIN-GAS system Ø100 - Ø150.....                                       | 65        |
| 6.11     | Jeremias - TWIN-GAS system Ø130 - Ø200.....                                       | 71        |
| 6.12     | Modinox - PLA system Ø100 - Ø153.....                                             | 77        |
| 6.13     | Modinox - PLA system Ø130 - Ø200.....                                             | 87        |

# 1 About this document

This document shows the necessary information to do these tasks on the Gas Fire Panorama 90-70 PF2:

- Preparation for installation

This document refers to the Gas Fire Panorama 90-70 PF2 as 'the appliance'. This document is an essential part of your appliance. Read it carefully before you do work on the appliance. Keep it in a safe place.

The original instructions of the document are in English. All other language versions of the document are translations of the original instructions. It is not always possible to provide a detailed illustration of every single item of the equipment. The illustrations in this document show a typical setup. The illustrations are for instructional use only.

## 1.1 How to work with this document

1. Make yourself familiar with the structure and content of the document.
2. Read the safety section in detail.
3. Make sure that you understand all the instructions.
4. Do the procedures completely and in the given sequence.

## 1.2 Warnings and cautions used in this document

### Warning

If you do not obey these instructions, there is a risk that can cause personal injury or death.

### Caution

If you do not obey these instructions, there is a risk of damage to the equipment or to property.

### Note

A note shows more information.

| Symbol                                                                              | Description                        |
|-------------------------------------------------------------------------------------|------------------------------------|
|  | Visual sign that there is a hazard |
|  | Visual sign that there is a notice |

## 1.3 Related documentation

- Preparation manual
- Installation and maintenance manual
- User manual
- Assembly instructions for concentric flue system

## 2 Overview of the concentric flue system

The concentric flue system provides the appliance with combustion air and removes the flue gases from the appliance. The concentric flue system is made of these items:

| Item                   | Description                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Concentric flue        | The concentric flue is a pipe with an inner pipe. The inner pipe is used as flue gas channel and the space between the inner pipe and the outer pipe is used as combustion air channel |
| Flue gas channel       | The flue gases from the appliance flow through the channel to the outlet by natural draught or, with the Opti-Vent installed, forced draught.                                          |
| Combustion air channel | Supplies the appliance with fresh air from the outlet through the channel                                                                                                              |
| Outlet/terminal        | Entry for the combustion air channel and exit for the flue gas channel                                                                                                                 |

## 3 Safety

### 3.1 Safety instructions for installation



**Caution:**

- The appliance must be installed as a 'room sealed system' appliance by a certified and registered gas installation engineer in accordance with the supplied installation instructions, and nationally and locally applicable regulations.
- If you have any questions regarding the installation, consult your local gas company.
- Before the installation starts, make sure that the details on the rating plate correspond with the gas type and supply pressure as intended for the appliance.
- Only use items in the installation that are specified in this manual and the related documents.
- Only use the following brands for the installation of the concentric flue system:

| Manufacturer                                         | System                        | Flue gas extraction |
|------------------------------------------------------|-------------------------------|---------------------|
| Barbas                                               | Muelink & Grol system         | Natural draught     |
| Poujoulat                                            | DUOGAS system                 | Natural draught     |
| Ontop                                                | Metaloterm US system          | Natural draught     |
| Jeremias/STB (STB = Schoorsteen Techniek-Brummen NL) | H-Twin system                 | Natural draught     |
| Jeremias                                             | TWIN-GAS system               | Natural draught     |
| Modinox                                              | PLA system                    | Natural draught     |
| Barbas                                               | Opti-Vent system <sup>1</sup> | Forced draught      |

- Do not use a combination of parts from different brands for the installation of the concentric flue system.
- All concentric flue systems in this list can be installed with (prefabricated) building materials that are suitable for T400 or higher. (T400 as described in the standard: prEN 1856-1; Chimneys - Requirements for metal chimneys - Part 1: System chimney products ). Concerns building materials according to DIN 18160 Chimney systems.

<sup>1</sup> For installation and use of the Opti-Vent system refer to the Barbas manual "installation and maintenance manual Opti-Vent system."

## 4 Requirements

### 4.1 Requirements on the location

- Never use combustible building materials for the fireplace.
- Do not install the appliance against a flammable rear wall.
- Install a non-flammable insulation plate of at least 12 mm between the appliance and a non-flammable rear wall. The insulation plate must cover the entire area of the rear of the appliance.
- For details about the installation, minimum clearances to flammable materials, permitted insulation materials and air gaps, refer to the "installation and maintenance manual".
- If the fire burns in the appliance, make sure that the floor temperatures below and in front of the appliance cannot be higher than 85 °C .
- Make sure that the room where the appliance is installed is properly ventilated.

### 4.2 Requirements on the convection package (option)

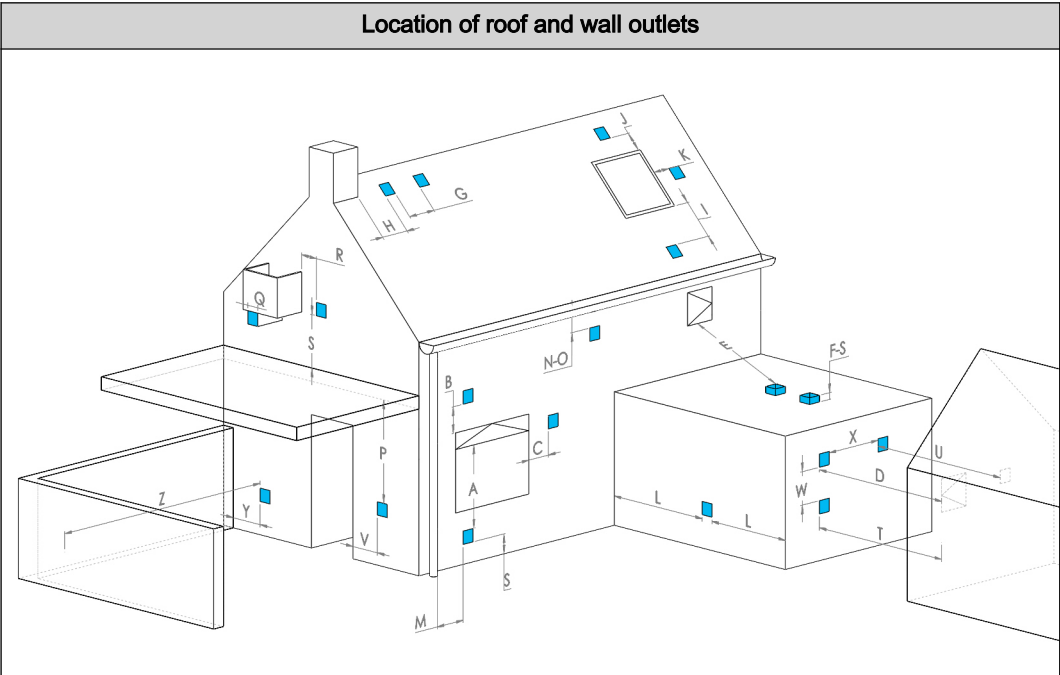
- The convection outlet opening must be at least 0,5 meter above the appliance.
- No flammable material is present within 10 cm on both sides and 20 cm above the convection outlet opening.
- The convection outlet opening must be at least 15 cm below the ceiling.

### 4.3 Other requirements

- The gas supply connection is near the operating unit for an easy connection.
- Only use gas piping of at least ½" and a shut-off valve to connect the gas supply to the gas regulator block of the appliance.
- Make sure that there is a wall socket with earth connection nearby the appliance. The socket must be accessible at all times. The power cable (+ 0.5 m) is coming from the rear of the appliance.
- Install the fireplace on a solid floor that can bear the weight of the appliance and the fireplace.
- If the floor is made of flammable material, take correct safety measures. Install a temperature protection plate made of nonflammable material between the appliance and the floor.
- Install the appliance as a built-in appliance in a new fireplace.
- If the concentric flue system is installed in an existing chimney that is used for wood or coal fire, clean the chimney.
- If you built a new fireplace, make sure that it is ventilated with vents at the bottom and top of the fireplace<sup>2</sup>. If the fireplace is not ventilated the temperature of the appliance can increase to dangerous temperatures and damage the fireplace.
- Keep a minimum distance between the appliance and flammable mantel pieces. Refer to the chapter "Mantel piece clearances" in the "installation and maintenance manual": for the correct minimum clearances.

<sup>2</sup> An operating unit installed at the bottom of the fireplace surround makes sure enough ventilation air flows into the fireplace surround and a separate vent at the bottom of the fireplace is not necessary.

4.4 Requirements on the roof and wall outlet



Refer to the table hereunder for explanation of the figure.



**Note:** All the minimum distances in the table are guidelines. Consult your national and local regulations for the exact minimum distances.

| Minimum separation distances for roof and wall outlet(terminal) in mm |                                                                            |                       |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------|
| Location                                                              |                                                                            | Minimum distance [mm] |
| A                                                                     | Below an opening <sup>3</sup> on the same wall/roof                        | 2000                  |
| B                                                                     | Above an opening <sup>3</sup> on the same wall/roof                        | 700                   |
| C                                                                     | Horizontally to an opening <sup>3</sup> on the same wall/roof              | 700                   |
| D                                                                     | Horizontally to a facing opening <sup>3</sup> in a opposite wall           | 2000                  |
| E                                                                     | From a roof terminal under an opening <sup>3</sup> in a nearby rising wall | 4000                  |
| F                                                                     | Above a flat or pitched roof                                               | 300                   |
| G                                                                     | Horizontally from a terminal on the same roof                              | 300                   |
| H                                                                     | From a structure (e.g. brick chimney) on the roof                          | 300                   |
| I                                                                     | Below a roof window in a pitched roof                                      | 2000                  |
| J                                                                     | Above a roof window in a pitched roof                                      | 600                   |
| K                                                                     | Horizontally to a roof window in a pitched roof                            | 600                   |
| L                                                                     | From an internal or external corner                                        | 500                   |
| M                                                                     | From a vertical drainpipe or soil pipe                                     | 300                   |
| N                                                                     | Below gutters, soil pipes or drainpipes, made of flammable materials       | 500                   |
|                                                                       | Below gutters, soil pipes or drainpipes, made of non-flammable materials   | 300                   |
| O                                                                     | Below eaves, made of flammable material                                    | 500                   |
|                                                                       | Below eaves, made of non-flammable material                                | 300                   |
| P                                                                     | Below balcony <sup>4</sup> or car port roof                                | 2000                  |
| Q                                                                     | Beyond the balcony <sup>4</sup> edge                                       | 0                     |
| R                                                                     | On either side of a balcony <sup>4</sup>                                   | 1500                  |
| S                                                                     | Above ground, roof or balcony <sup>4</sup> level                           | 300                   |
| T                                                                     | From a surface facing the terminal                                         | 500                   |
| U                                                                     | From a terminal facing the terminal (at the same height)                   | 600                   |
| V                                                                     | From an opening in the car port into the building                          | 1200                  |
| W                                                                     | Vertically from a terminal on the same wall                                | 1200                  |
| X                                                                     | Horizontally from a terminal on the same wall                              | 300                   |
| Y                                                                     | From a boundary alongside the terminal                                     | 1000                  |
| Z                                                                     | From a boundary facing the terminal                                        | 2000                  |

- If the outlet is installed less than 0.5 m horizontally and less than 2 m vertically from a public area, install an effective protector.
- Make sure that the mesh size of the guard does not effect the operation of the appliance.
- If the height of the outlet is less than 3 meter from the floor, the distance between the outlet and a garden or a terrace must be minimum 2 meter.

<sup>3</sup> An opening here means an element that is permanent open (example: an air vent) or that can open (example: a door or window). But, in addition, the distance between outlet and built-in elements (example: window, door) must be minimum 300 mm.

<sup>4</sup> Balcony or gallery of an apartment building.

4.5 Requirements on the concentric flue system

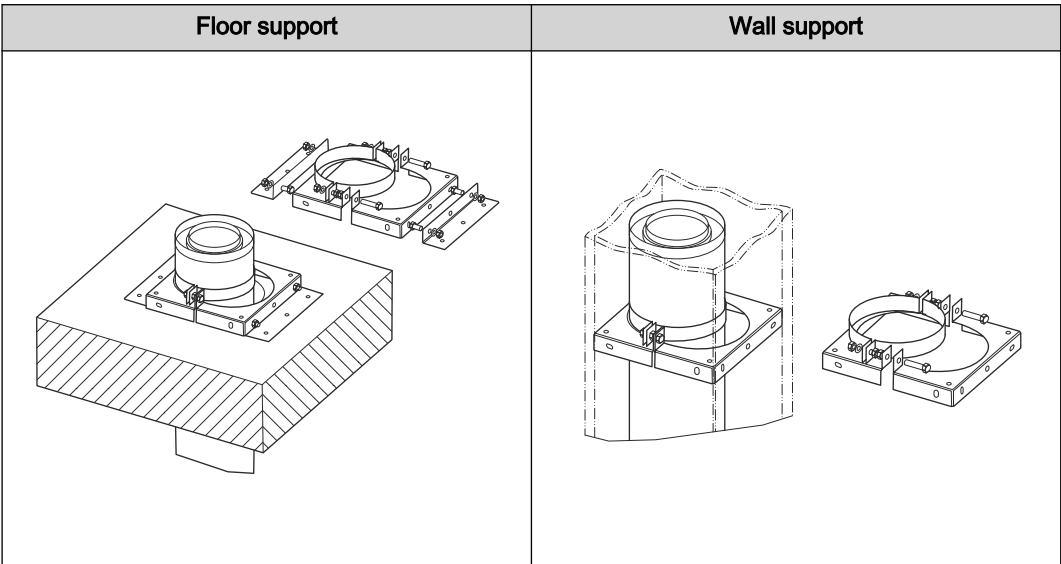


Caution:

- Make sure that no flammable materials are located close to the flue system. The outer walls of the flue system can be 150 °C.
- Make sure that the concentric flue system is in a casing.
  - Make sure that the casing is made of heat resistant material.
  - Make sure that air can flow in the casing. Use grates near the floor and near the ceiling. Do this for every floor where the casing is located.
- Do not insulate the concentric flue.

The parts that are required for the installation of the concentric flue system are numbered in the illustrations and refer to the part list in [6](#).

Use the universal wall/floor support (number 36 in the part list) to attach the concentric flue system to the casing and/or the floor.



Install a concentric flue system as described in this section.

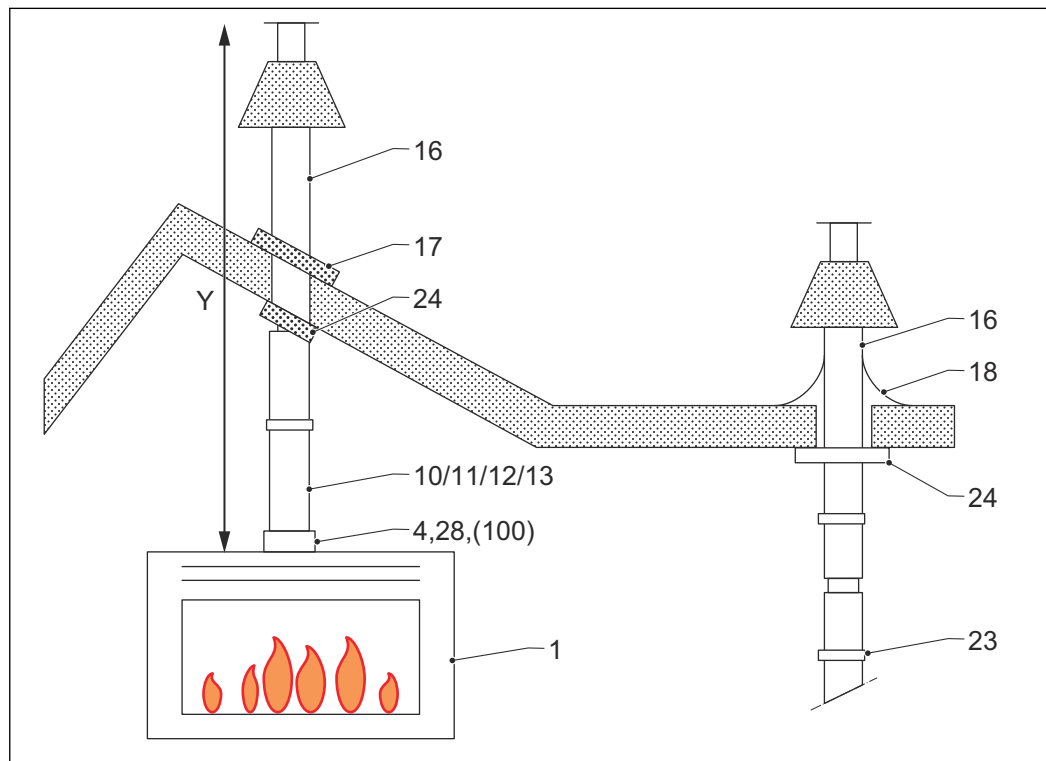
Some configurations of the concentric flue system require the installation of a flue restriction plate. Different sizes of the flue restriction plate are delivered with the appliance. Refer to the Installation and maintenance manual.

#### 4.5.1 Possibilities for a concentric flue system with a roof outlet

### Rigid concentric flue systems



**Note:** Refer to chapter 6 for a description of the numbers in the figures.



Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y<br>(min. - max.) | Flue gas restriction plate width                       |                                                        |
|--------------------|--------------------------------------------------------|--------------------------------------------------------|
|                    | Concentric connection on the appliance is Ø100-Ø150 mm | Concentric connection on the appliance is Ø130-Ø200 mm |
| 2.0 - 4.0 m        | 30 mm                                                  | 65 mm                                                  |
| 4.0 - 12.0 m       | 40 mm                                                  | 80 mm                                                  |



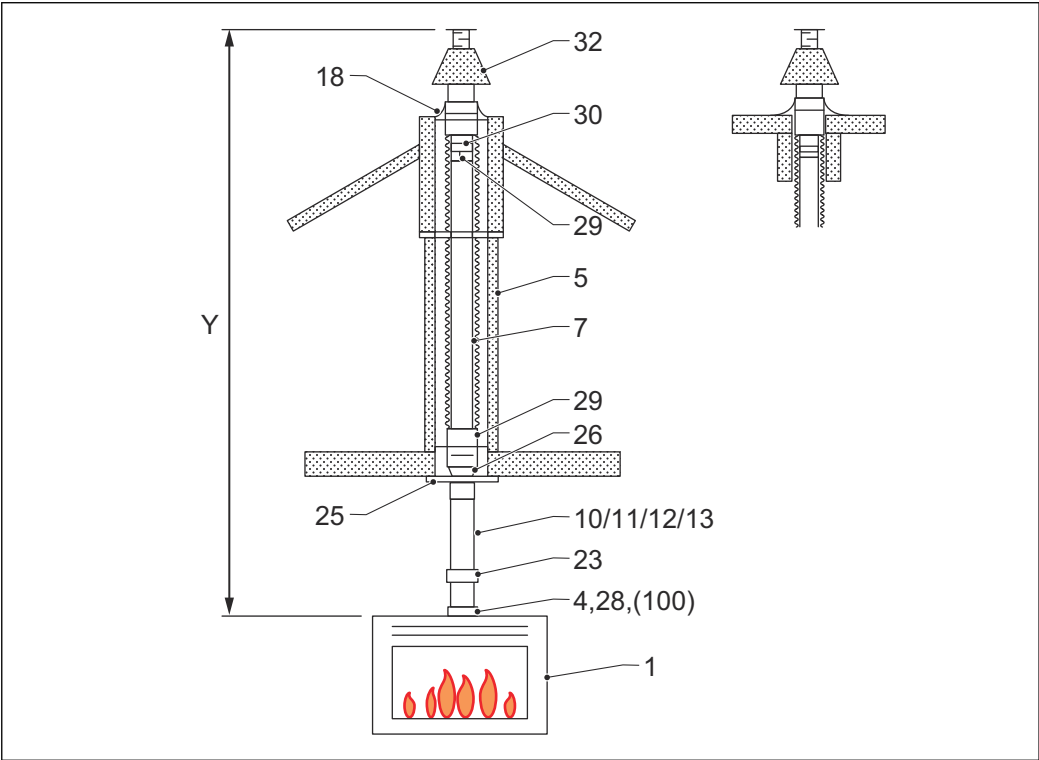
Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y <sub>1</sub><br>(min. - max.) | X<br>(min. - max.) | Y <sub>1</sub> + Y <sub>2</sub><br>(min. - max.) | Flue gas restriction plate width                             |                                                              |
|---------------------------------|--------------------|--------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
|                                 |                    |                                                  | Concentric connection<br>on the appliance is<br>Ø100-Ø150 mm | Concentric connection<br>on the appliance is<br>Ø130-Ø200 mm |
| 1.0 - 11.0 m                    | 0 - 3.0 m          | 2.0 - 11.0 m                                     | -                                                            | 40 mm                                                        |



**Caution:**  
Make sure that Y<sub>1</sub> + Y<sub>2</sub> is at least 2 times larger than X.

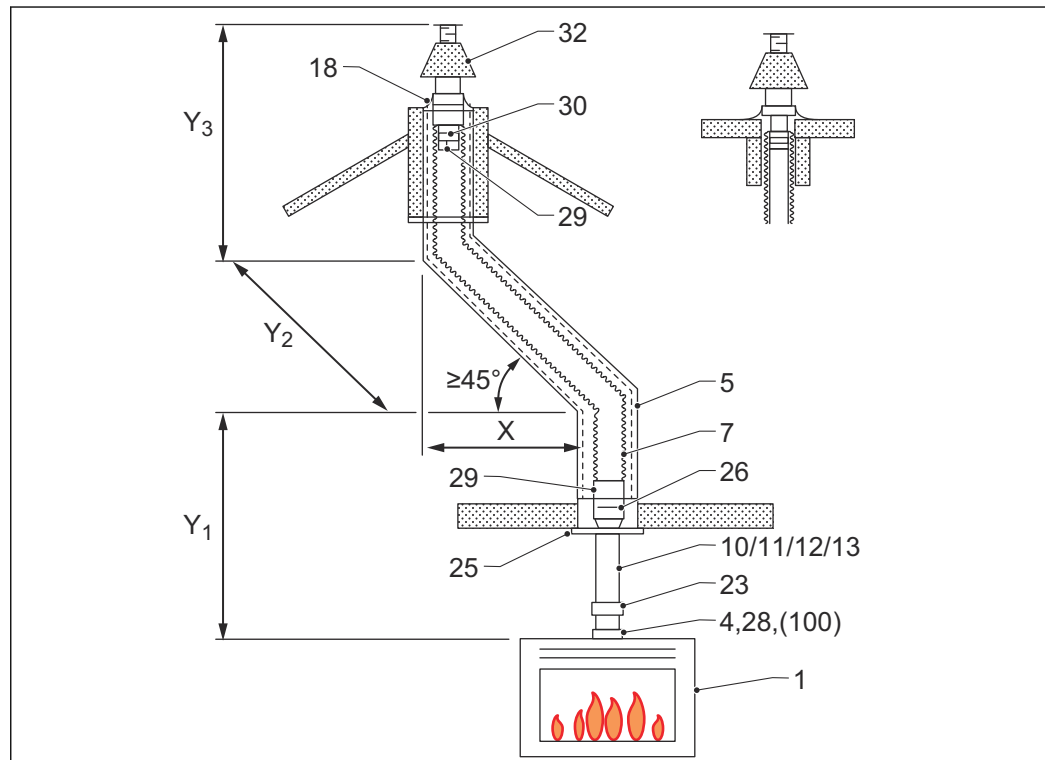
Flexible concentric flue systems



Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y<br>(min. - max.) | Flue gas restriction plate width                       |                                                        |
|--------------------|--------------------------------------------------------|--------------------------------------------------------|
|                    | Concentric connection on the appliance is Ø100-Ø150 mm | Concentric connection on the appliance is Ø130-Ø200 mm |
| 2.0 - 4.0 m        | 30 mm                                                  | 65 mm                                                  |
| 4.0 - 12.0 m       | 40 mm                                                  | 80 mm                                                  |

Roof outlet using an flexible Ø100 mm liner in an existing lined chimney.



Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

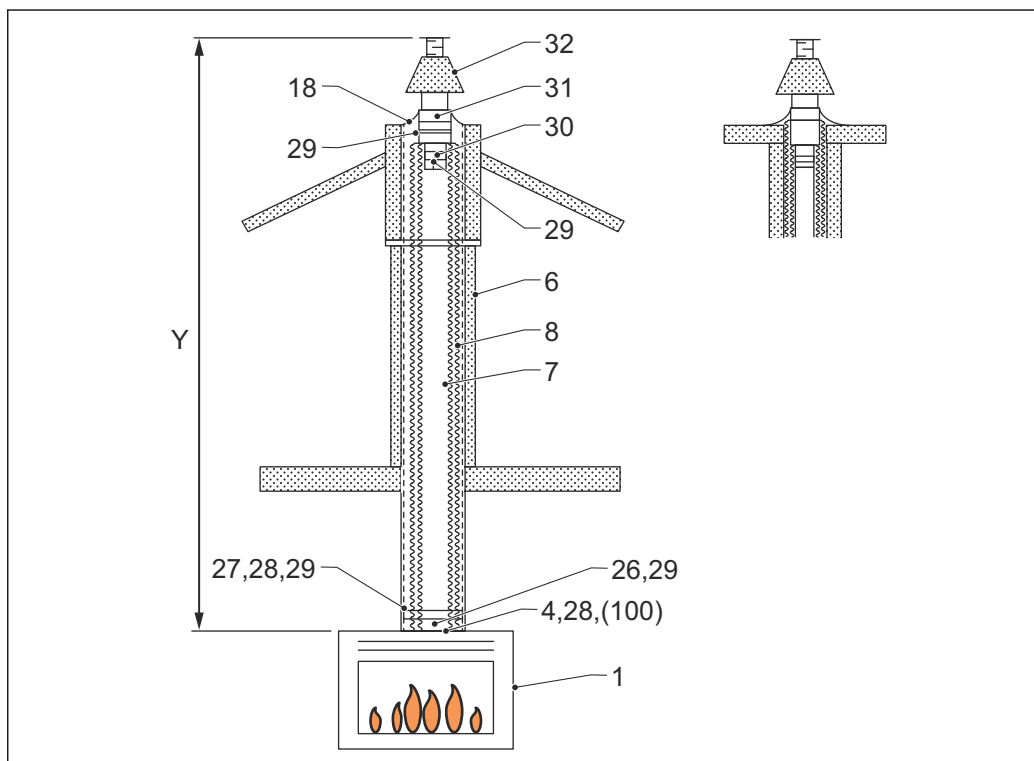
| Y <sub>1</sub><br>(min. - max.) | X<br>(min. - max.) | Y <sub>1</sub> + Y <sub>2</sub> + Y <sub>3</sub><br>(min. - max.) | Flue gas restriction plate width                             |                                                              |
|---------------------------------|--------------------|-------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
|                                 |                    |                                                                   | Concentric connection<br>on the appliance is<br>Ø100-Ø150 mm | Concentric connection<br>on the appliance is<br>Ø130-Ø200 mm |
| 1.0 - 11.0 m                    | 0 - 3.0 m          | 2.0 - 11.0 m                                                      | -                                                            | 40 mm                                                        |



**Caution:**

Make sure that  $Y_1 + Y_2 + Y_3$  is at least 2 times larger than  $X$ .

Roof outlet using an flexible Ø100 mm liner in an existing lined chimney.



Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y<br>(min. - max.) | Flue gas restriction plate width                       |                                                        |
|--------------------|--------------------------------------------------------|--------------------------------------------------------|
|                    | Concentric connection on the appliance is Ø100-Ø150 mm | Concentric connection on the appliance is Ø130-Ø200 mm |
| 2.0 - 4.0 m        | 30 mm                                                  | 65 mm                                                  |
| 4.0 - 12.0 m       | 40 mm                                                  | 80 mm                                                  |

Roof outlet using an flexible Ø100 mm liner and flexible Ø150 mm liner in an existing unsound lined chimney.



Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y <sub>1</sub><br>(min. - max.) | X<br>(min. - max.) | Y <sub>1</sub> + Y <sub>2</sub> + Y <sub>3</sub><br>(min. - max.) | Flue gas restriction plate width                             |                                                              |
|---------------------------------|--------------------|-------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
|                                 |                    |                                                                   | Concentric connection<br>on the appliance is<br>Ø100-Ø150 mm | Concentric connection<br>on the appliance is<br>Ø130-Ø200 mm |
| 1.0 - 11.0 m                    | 0 - 3.0 m          | 2.0 - 11.0 m                                                      | -                                                            | 40 mm                                                        |



**Caution:**  
Make sure that Y<sub>1</sub> + Y<sub>2</sub> + Y<sub>3</sub> is at least 2 times larger than X.

Roof outlet using an flexible Ø100 mm liner and flexible Ø150 mm liner in an existing unsound lined chimney.

4.5.2 Possibilities for a concentric flue system with a wall outlet

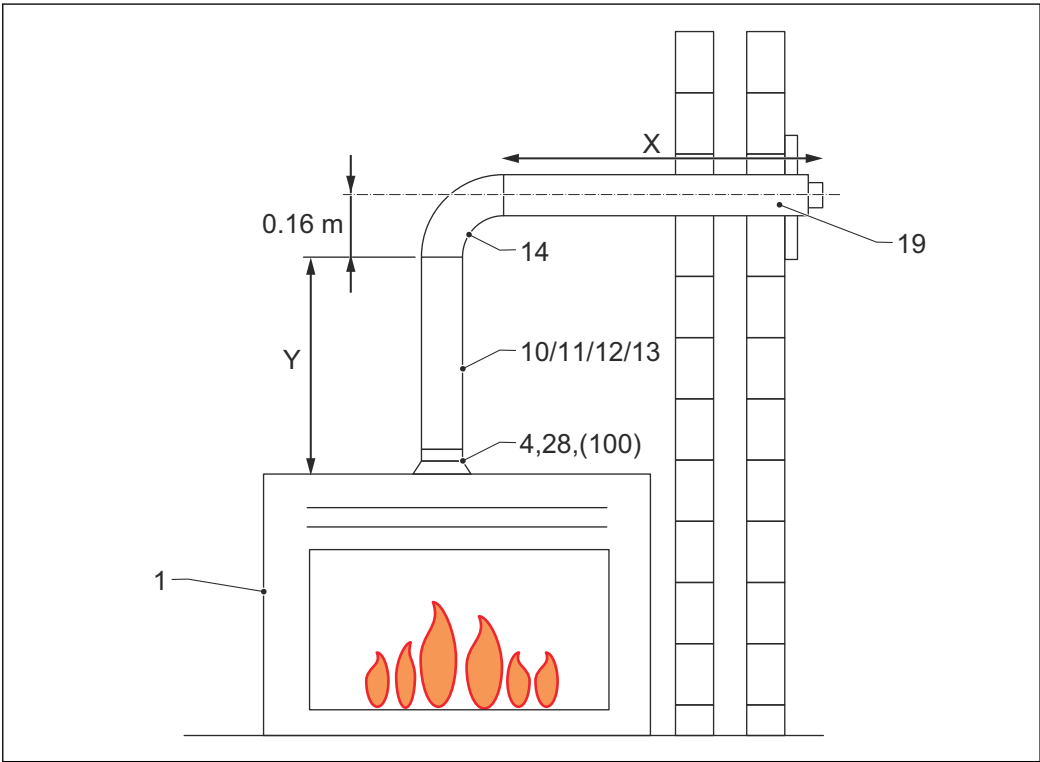


**Note:** Refer to chapter 6 for a description of the numbers in the figures.

Install the wall outlet in the correct position as shown in the figure. The centre of the inner pipe must be positioned above the centre of the outer pipe.

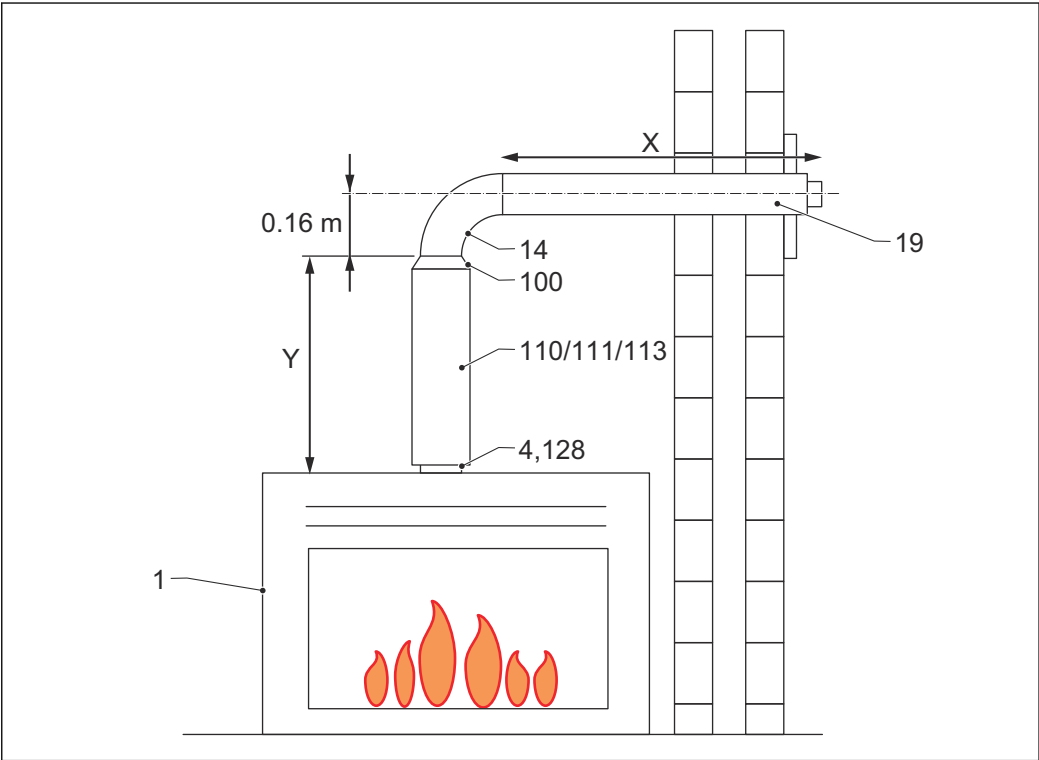


Rigid concentric flue systems



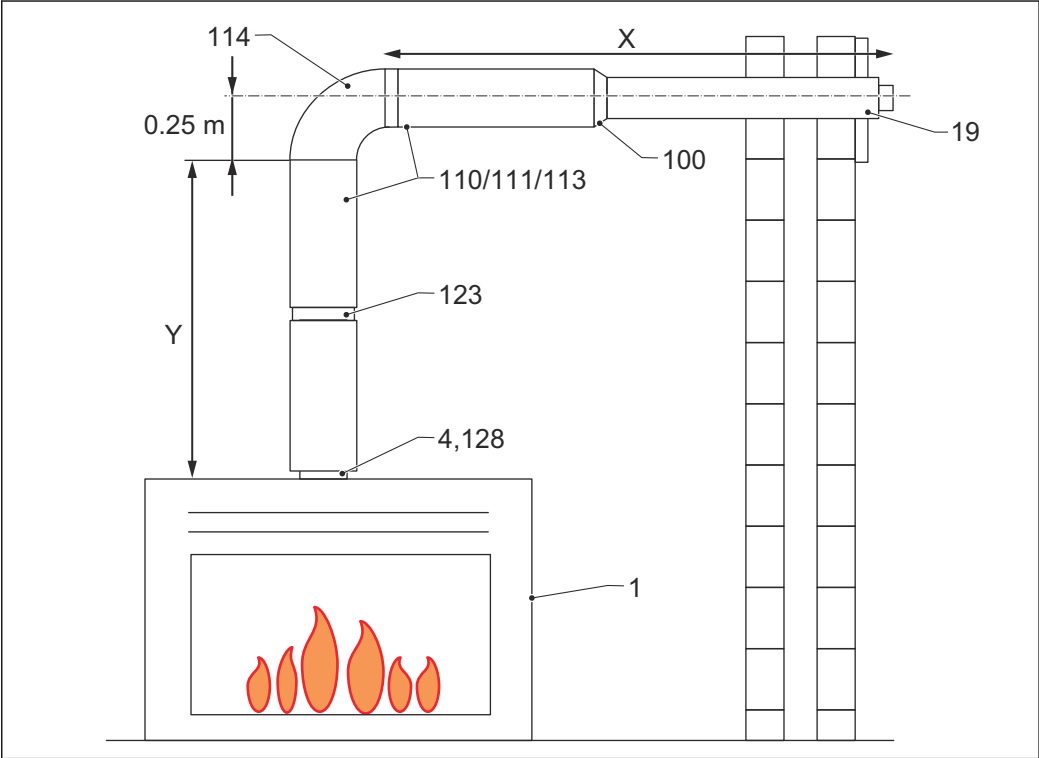
Concentric flue connection on appliance Ø100-Ø150 mm or Ø130-Ø200 mm

| Y<br>(min. - max.) | X<br>(min. - max.) | Flue gas restriction plate                                   |                                                               |
|--------------------|--------------------|--------------------------------------------------------------|---------------------------------------------------------------|
|                    |                    | Concentric connection<br>on the appliance is<br>Ø100-Ø150 mm | Concentric connection on<br>the appliance is Ø130-<br>Ø200 mm |
| 1.5 - 2.5 m        | 0 - 0.6 m          | -                                                            | -                                                             |
| 2.5 - 3.5 m        | 0 - 1.6 m          | -                                                            | -                                                             |



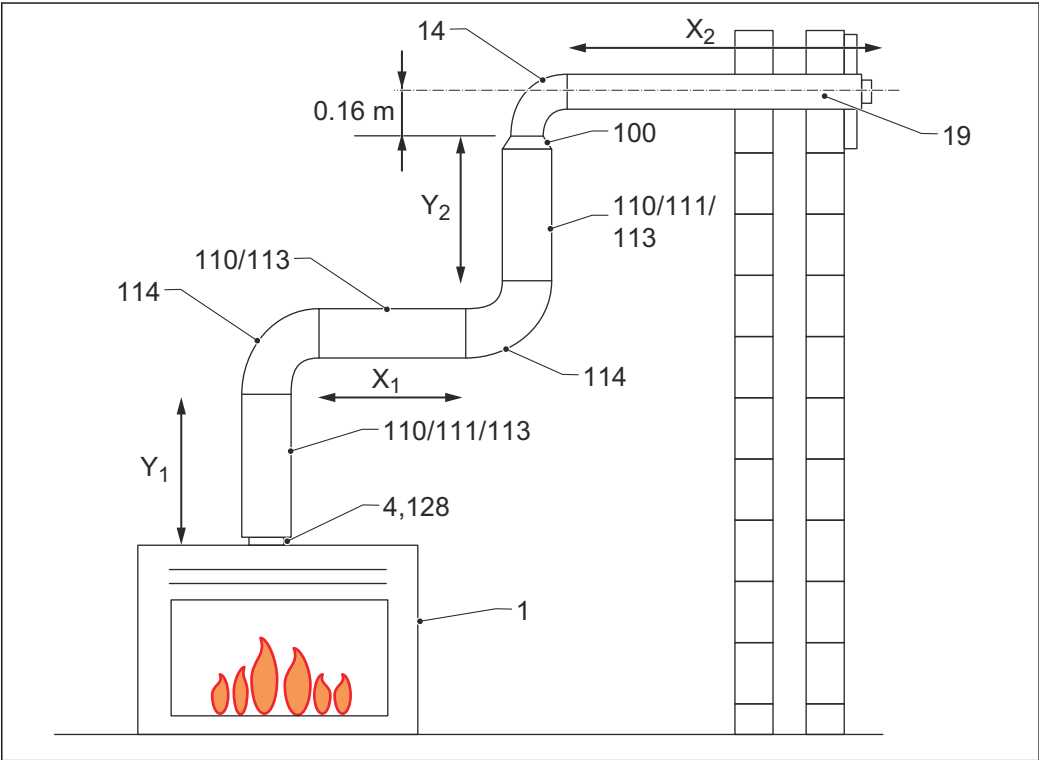
Concentric flue connection on appliance Ø130-Ø200 mm

| Y<br>(min. - max.) | X<br>(min. - max.) | Flue gas restriction plate width                       |
|--------------------|--------------------|--------------------------------------------------------|
|                    |                    | Concentric connection on the appliance is Ø130-Ø200 mm |
| 0.5 - 1.0 m        | 0 - 0.6 m          | -                                                      |
| 1.0 - 2.0 m        | 0 - 2.6 m          | -                                                      |



Concentric flue connection on appliance Ø130-Ø200 mm

| Y<br>(min. - max.) | X<br>(min. - max.) | Flue gas restriction plate width                          |
|--------------------|--------------------|-----------------------------------------------------------|
|                    |                    | Concentric connection on the appliance<br>is Ø130-Ø200 mm |
| 0.5 - 1.0 m        | 0 - 1.6 m          | -                                                         |
| 1.0 - 3.0 m        | 0 - 4.6 m          | -                                                         |



Concentric flue connection on appliance Ø130-Ø200 mm

| Y <sub>1</sub><br>(min. - max.) | X <sub>1</sub><br>(min. - max.) | Y <sub>2</sub><br>(min. - max.) | X <sub>2</sub><br>(min. - max.) | Flue gas restriction plate width                       |
|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------------------------------------------------|
|                                 |                                 |                                 |                                 | Concentric connection on the appliance is Ø130-Ø200 mm |
| 0 - 0.5 m                       | 0 - 0.5 m                       | 0.5 - 1.0 m                     | 0 - 0.6 m                       | -                                                      |
| 0.5 - 1.0 m                     | 0 - 0.5 m                       | 0 - 0.5 m                       | 0 - 0.6 m                       | -                                                      |
| 1.0 - 3.0 m                     | 0 - 1.0 m                       | 0.5 - 2.0 m                     | 0 - 0.6 m                       | -                                                      |
| 1.0 - 3.0 m                     | 0 - 3.0 m                       | 1.0 - 3.0 m                     | 0 - 0.6 m                       | -                                                      |

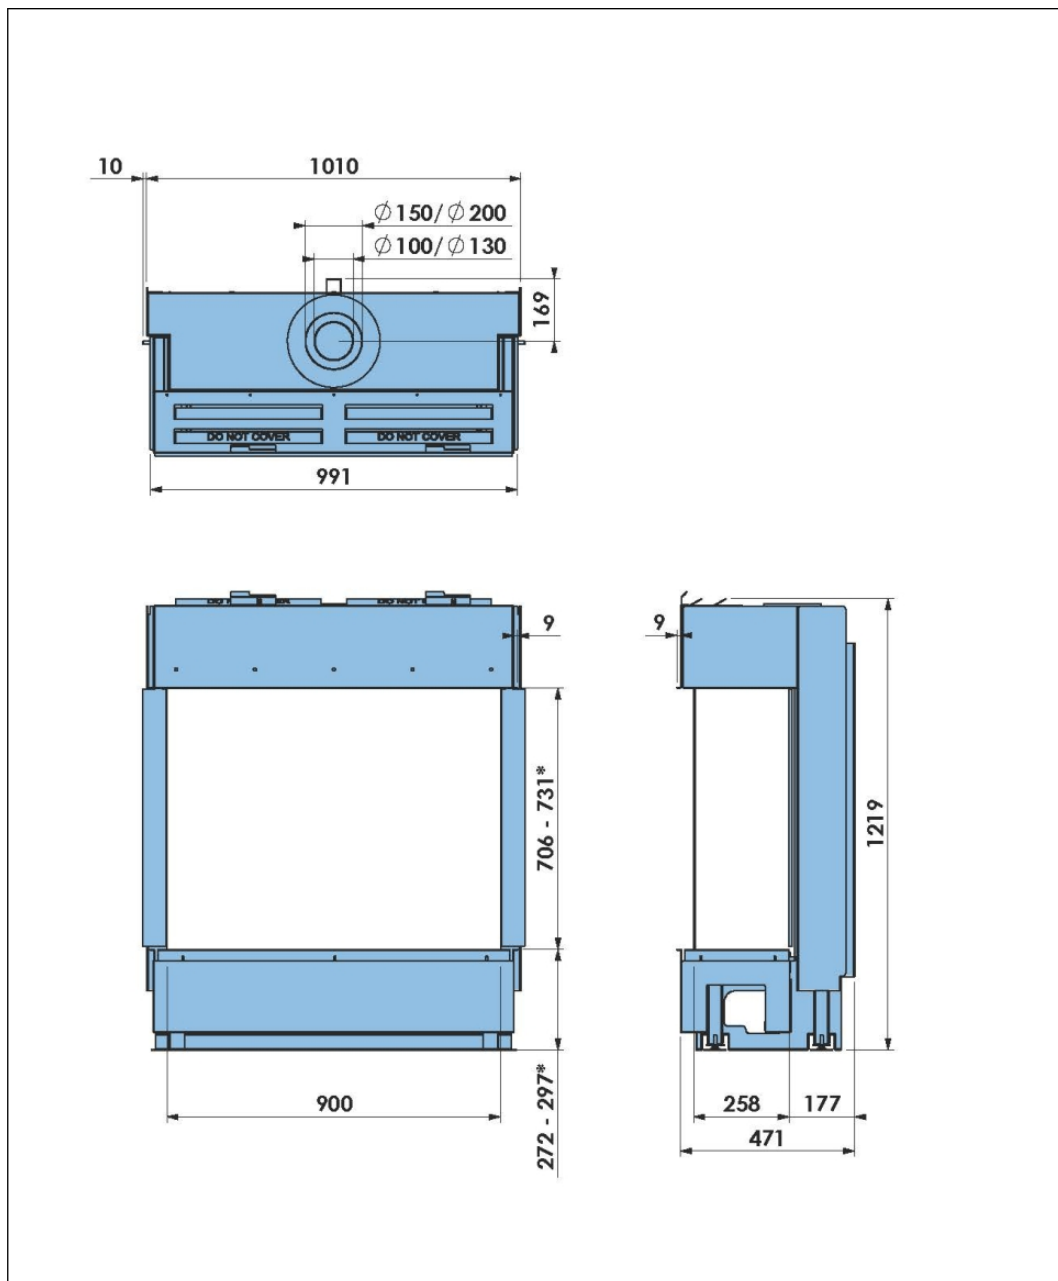


Concentric flue connection on appliance Ø130-Ø200 mm

| Y<br>(min. - max.) | X<br>(min. - max.) | Flue gas restriction plate width                          |
|--------------------|--------------------|-----------------------------------------------------------|
|                    |                    | Concentric connection on the appliance<br>is Ø130-Ø200 mm |
| 0 - 0.5 m          | 0 - 0.6 m          | -                                                         |
| 0.5 - 1.0 m        | 0 - 3.6 m          | -                                                         |
| 1.0 - 3.0 m        | 0 - 8.6 m          | -                                                         |

## 5 Technical specification

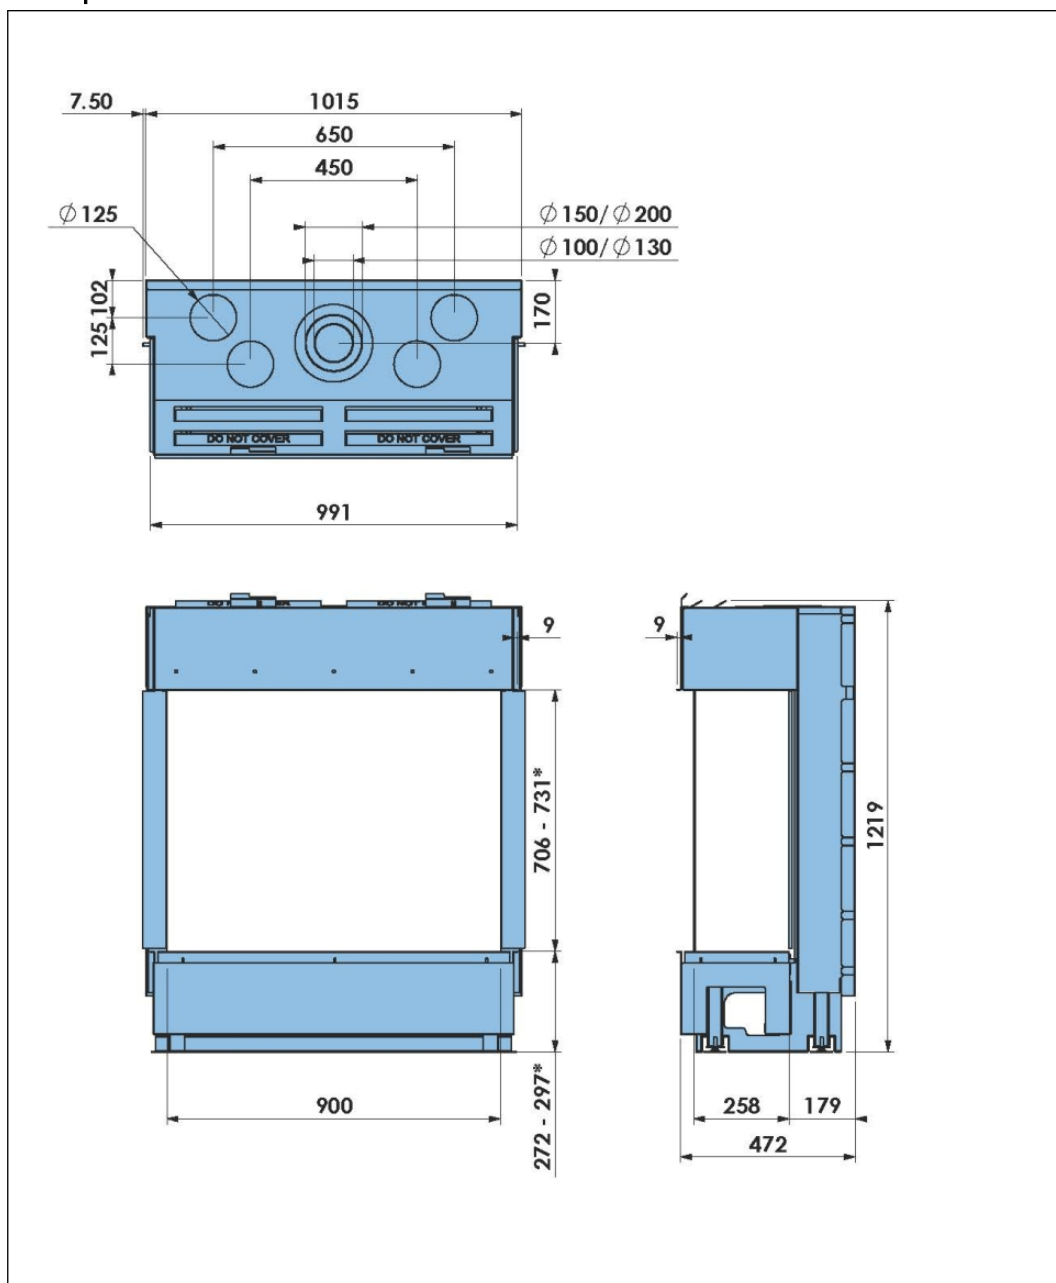
### 5.1 Gas Fire Panorama 90-70 PF2 Frameless



\* = Adjustable

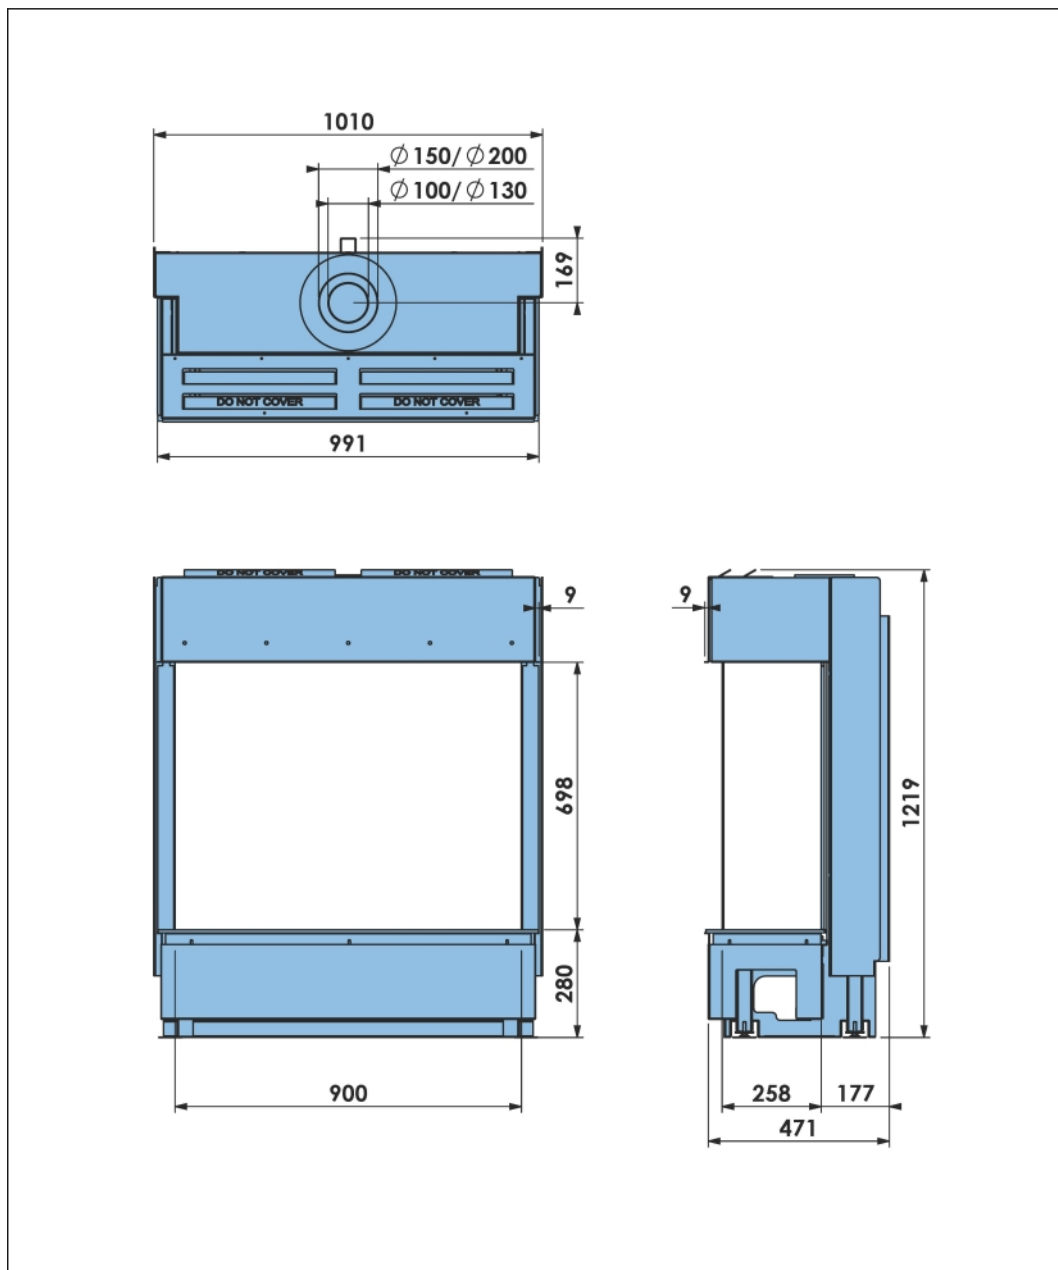
## 5.2 Gas Fire Panorama 90-70 PF2 Frameless with convection casing

With optional convection case



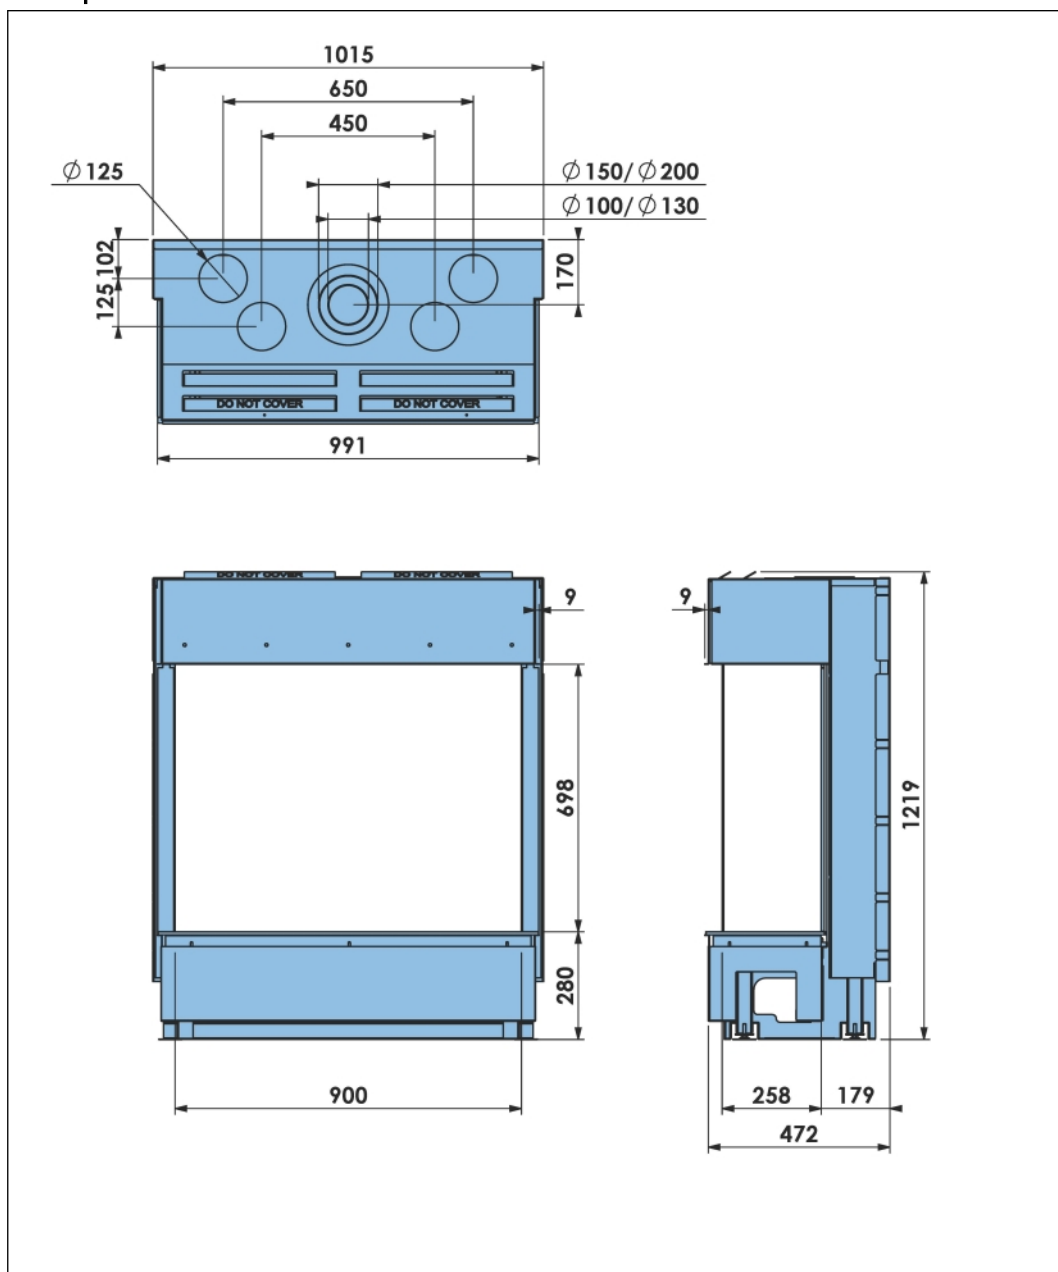
\* = Adjustable

## 5.3 Gas Fire Panorama 90-70 PF2 with 4 cm frame

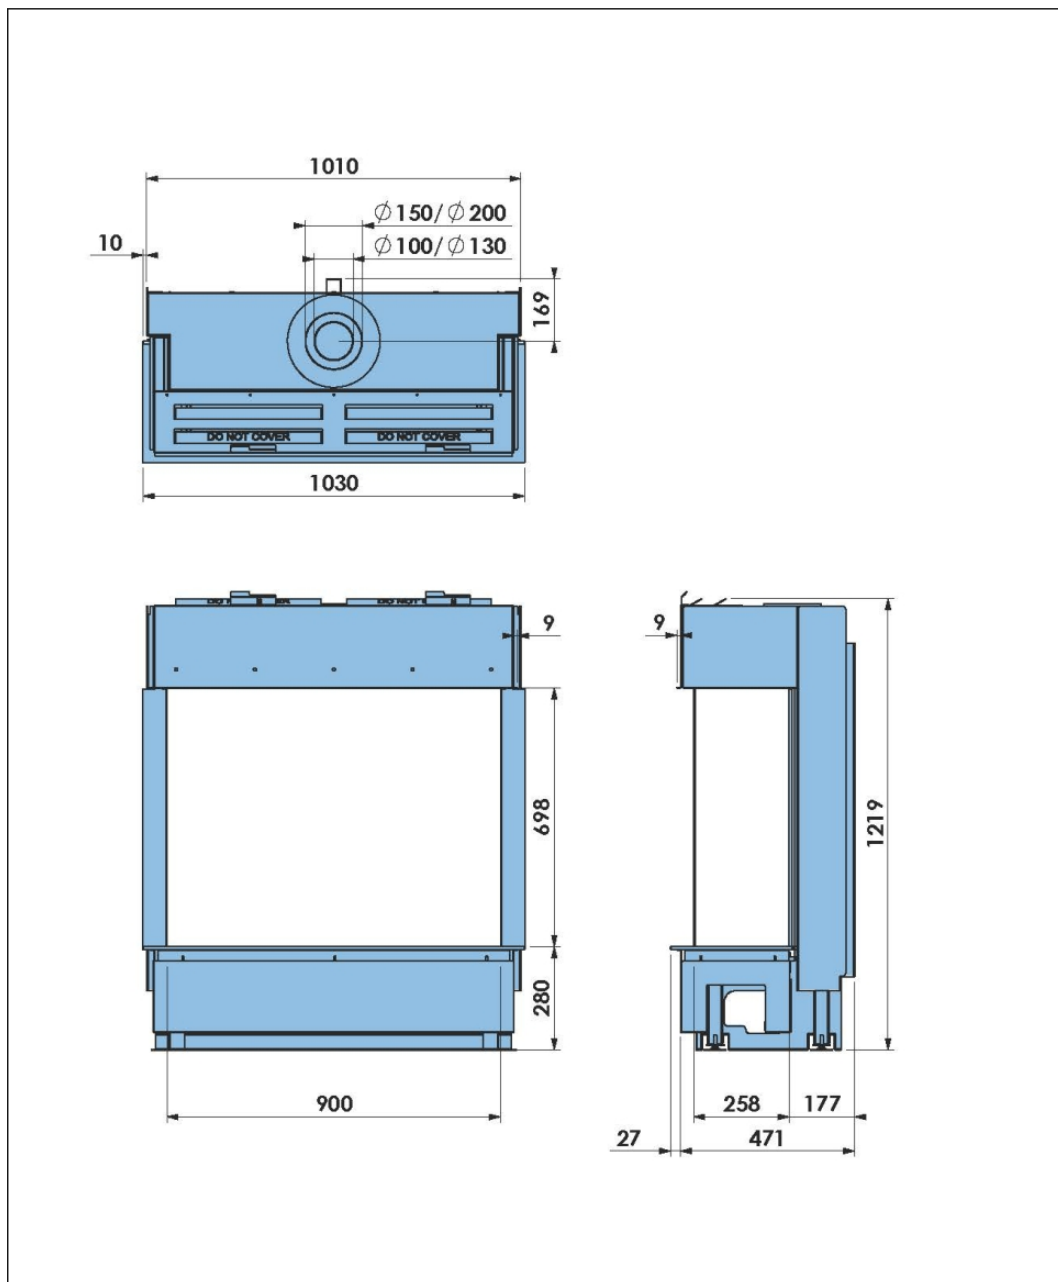


## 5.4 Gas Fire Panorama 90-70 PF2 with 4 cm frame and convection casing

With optional convection case

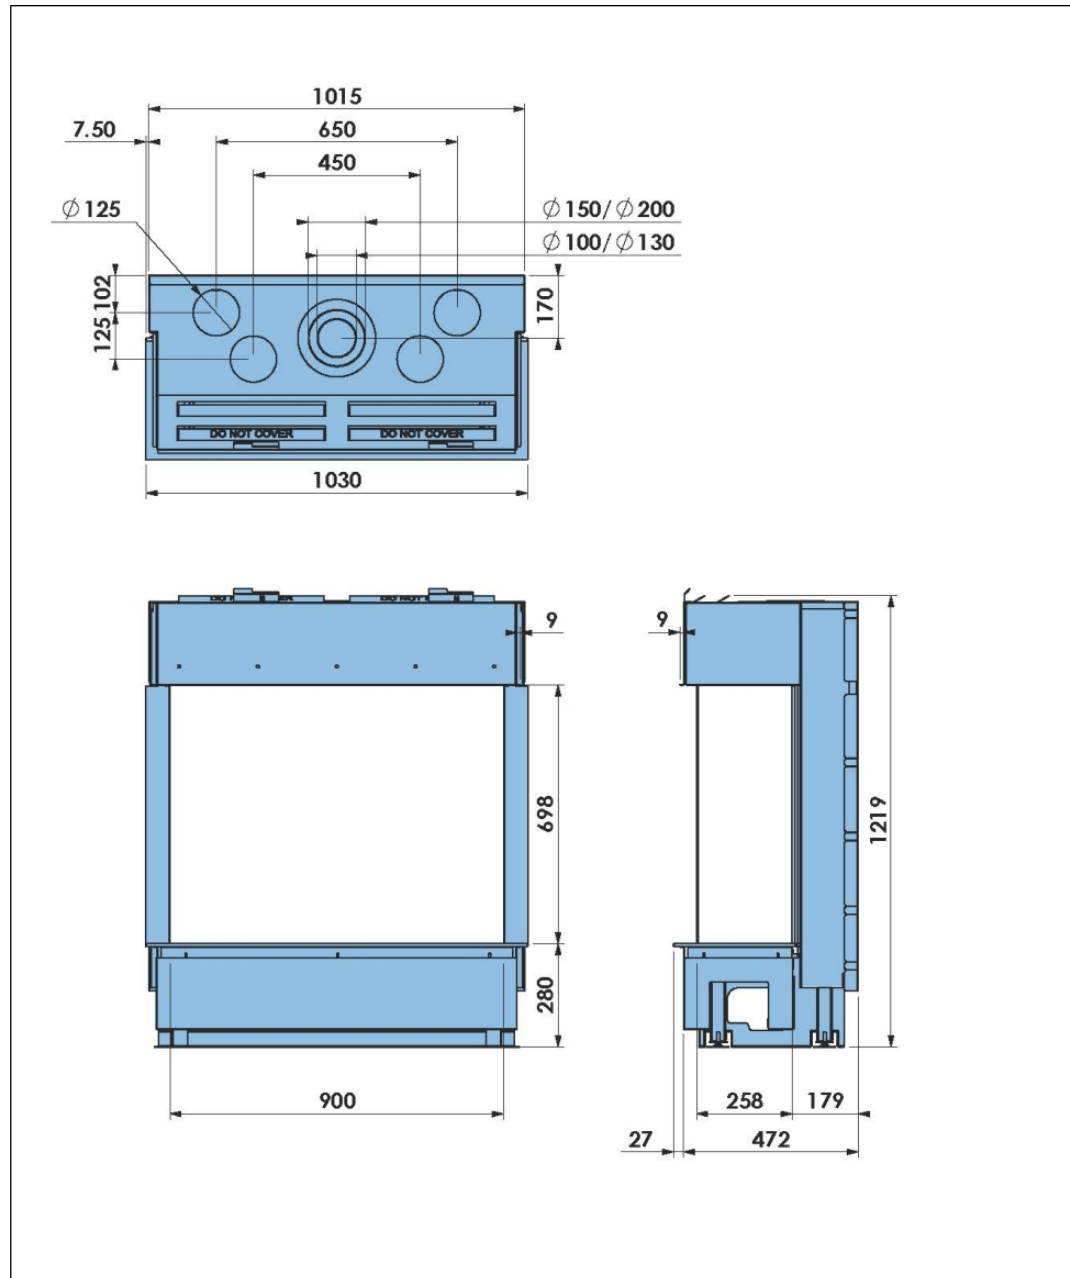


## 5.5 Gas Fire Panorama 90-70 PF2 with 6 cm frame

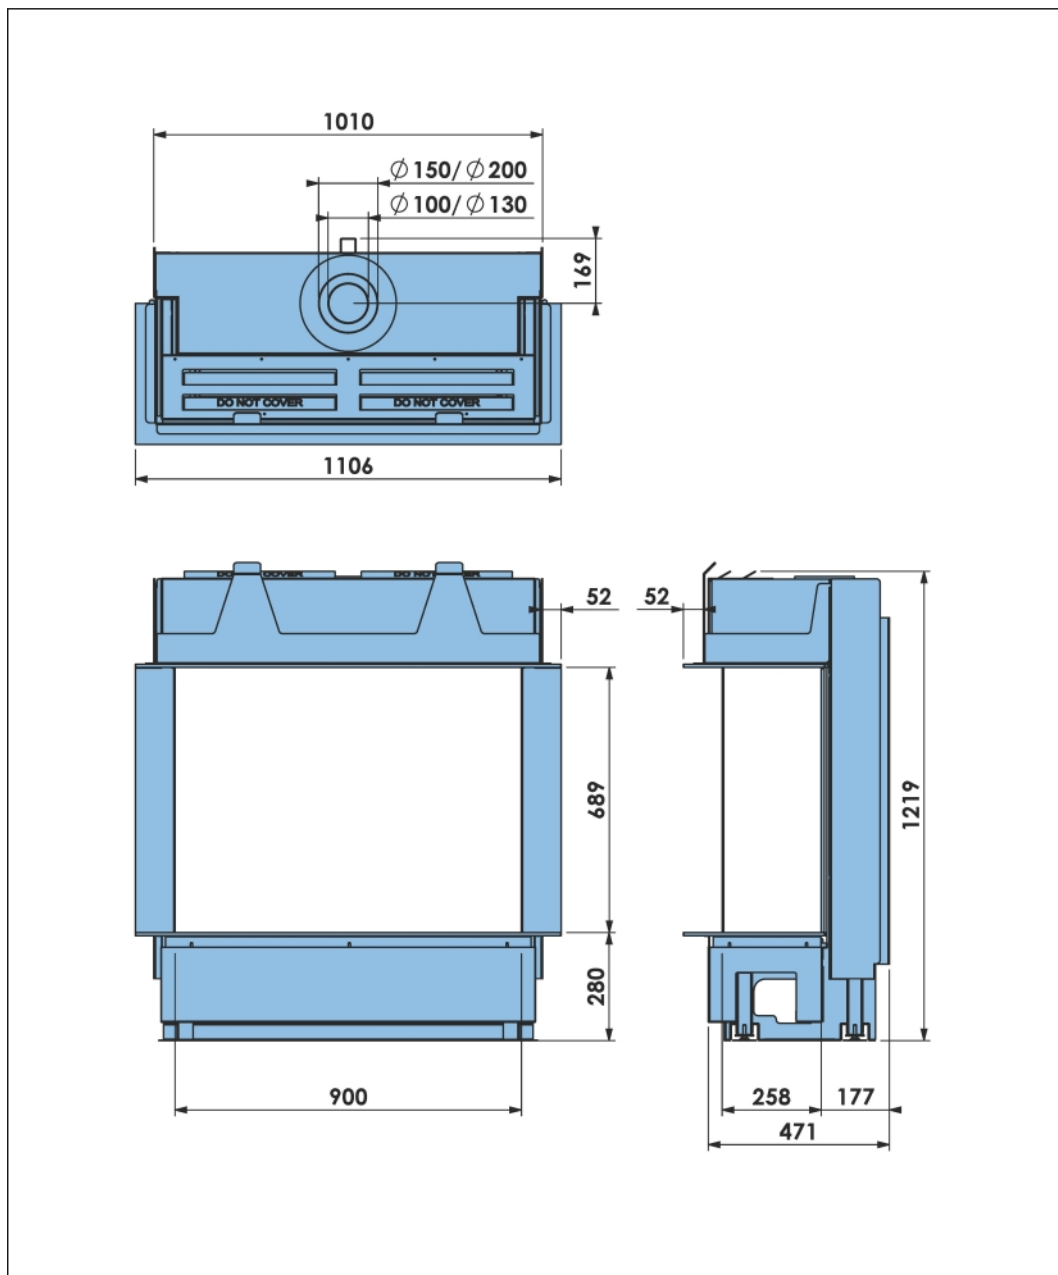


## 5.6 Gas Fire Panorama 90-70 PF2 with 6 cm frame and convection casing

### With optional convection case

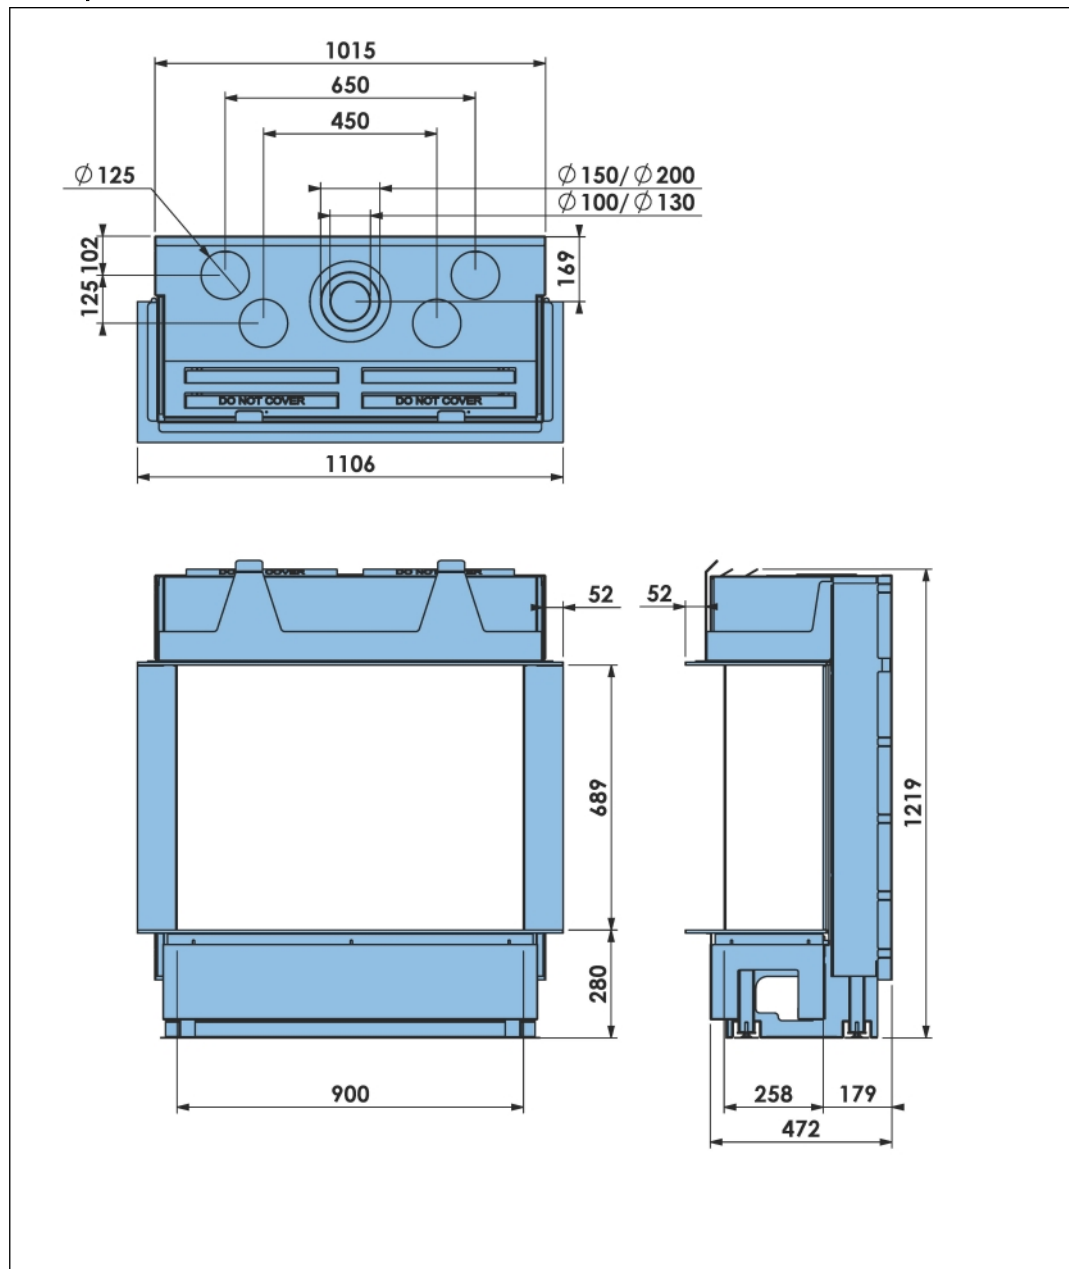


## 5.7 Gas Fire Panorama 90-70 PF2 with 10 cm frame

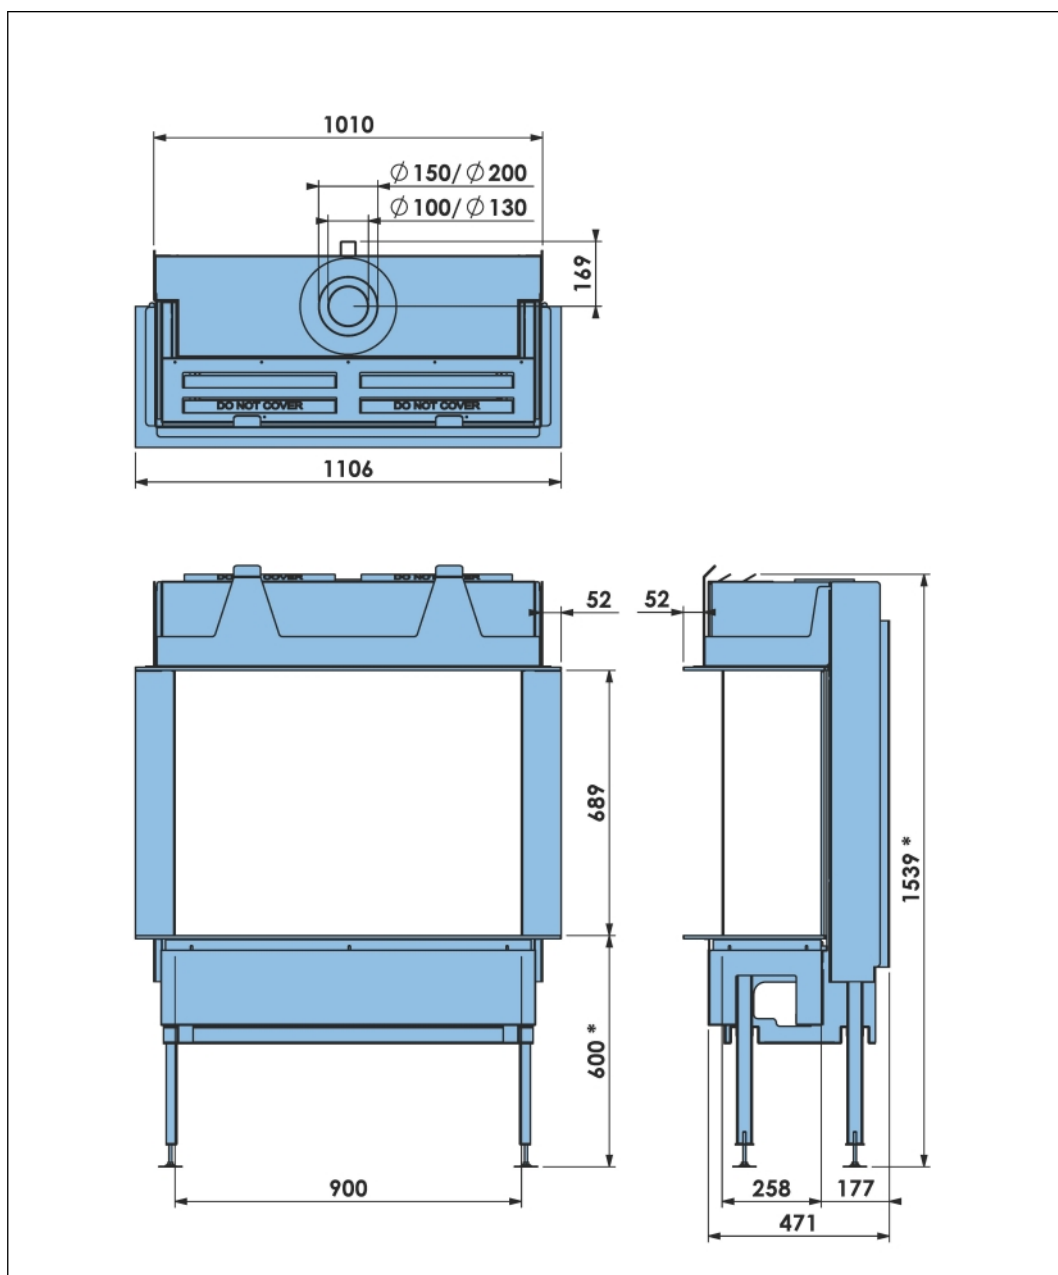


## 5.8 Gas Fire Panorama 90-70 PF2 with 10 cm frame and convection casing

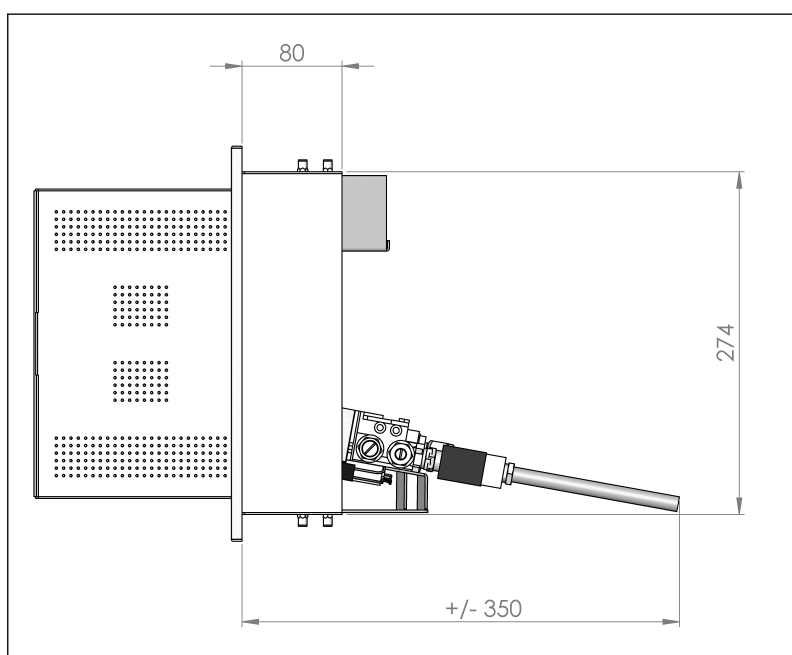
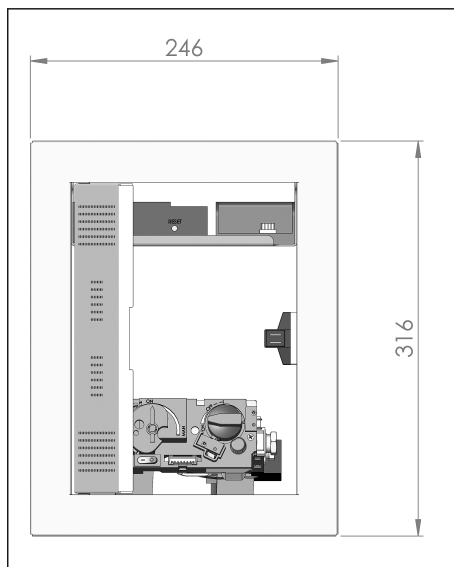
### With optional convection case



## 5.9 Gas Fire Panorama 90-70 PF2 with 10 cm frame and adjustable legs



## 5.10 Operating unit



## 5.11 Dimensions of the restriction plate

| Width of the delivered flue restriction plates in mm |                                        |
|------------------------------------------------------|----------------------------------------|
| Concentric flue connection Ø100 - Ø150               | Concentric flue connection Ø130 - Ø200 |
| Roof-mounted outlet                                  | Horizontal wall outlet                 |
| 30 mm                                                | 40 mm                                  |
| 40 mm                                                | 50 mm                                  |
| 50 mm                                                | 65 mm                                  |
| 65 mm                                                | 80 mm                                  |

## 6 Available components for the concentric flue system - natural draught



### Caution:

Observe the installation instructions that are supplied with the components of the concentric flue system.

The appliance with extraction of the flue gasses by natural draught, in combination with the concentric flue system [Ø100 mm - Ø150 mm] and/or [Ø130 mm - Ø200 mm] (rigid and/or flexible) for the brand types mentioned below, has been approved in accordance with the European CE-norm for gas appliances and may therefore be used only with these systems.

| Manufacturer                                         | system                |
|------------------------------------------------------|-----------------------|
| Barbas                                               | Muelink & Grol system |
| Poujolat                                             | DUOGAS system         |
| Ontop                                                | Metaloterm US system  |
| Jeremias/STB (STB = Schoorsteen Techniek-Brummen NL) | H-Twin system         |
| Jeremias                                             | TWIN-GAS system       |
| Modinox                                              | PLA system            |

The permitted components for these systems are listed in this chapter. The guarantee on the appliance lapses if it is installed, fully or partially, with other components or a different flue system. The concentric flue [Ø100 mm - Ø150 mm] and [Ø130 mm - Ø200 mm] systems can be used with either a newly-built or existing chimney.

Make sure that the wall or roof termination kit that is used for the installation of the concentric flue system is also listed in the available parts list.

### 6.1 Appliance part list

| Fig No. | Description                                                                                   |
|---------|-----------------------------------------------------------------------------------------------|
| 1       | Gas fire; Concentric flue connection Ø130/Ø200 mm or Ø100/Ø150 mm.                            |
| 2       | -                                                                                             |
| 3       | -                                                                                             |
| 4       | Restriction plate (The different sizes restriction plates are supplied with every appliance). |
| 5       | Chimney, min. Ø150 mm internal, totally gas tight.                                            |
| 6       | Chimney or fireproof sleeving. min. Ø160 mm internal.                                         |
| 7       | Ø100 mm internal flexible stainless steel gas vent chimney liner AISI 316Ti.                  |
| 8       | Ø150 mm internal flexible stainless steel gas vent chimney liner AISI 316Ti.                  |
| 9       | -                                                                                             |




## 6.2


### Barbas - Muelink & Grol system Ø100 - Ø150

| Fig. No. | Barbas Art./ Order No. | Description                                                          |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                      |                                                                                      | stainless steel | antr. | rigid       | flex |
| 10       | 302289                 | Twin-wall balanced flue pipe. L= 500 mm.                             |    | •               |       | •           |      |
|          | 346236                 | Twin-wall balanced flue pipe. L= 500 mm. BLACK                       |                                                                                      |                 | •     | •           |      |
| 11       | 302290                 | Twin-wall balanced flue pipe. L= 1000 mm.                            |   | •               |       | •           |      |
|          | 346234                 | Twin-wall balanced flue pipe. L= 1000 mm. BLACK                      |                                                                                      |                 | •     | •           |      |
| 12       | 302291                 | Telescopic twin-wall balanced flue pipe, L= min. 325 / max. 440 mm.  |  | •               |       | •           |      |
|          | 346511                 | Telescopic twin-wall balanced flue pipe, L= min. 965 / max. 1750 mm. |                                                                                      | •               |       | •           |      |
| 13       | 302292                 | Adjustable length twin-wall balanced flue pipe, L= 500 mm.           |  | •               |       | •           |      |
|          | 346237                 | Adjustable length twin-wall balanced flue pipe, L= 500 mm. BLACK     |                                                                                      |                 | •     | •           |      |
| 14       | 302299                 | Twin-wall balanced flue elbow 90°. (smooth)                          |  | •               |       | •           |      |
|          | 346238                 | Twin-wall balanced flue elbow 90°. (smooth), black                   |                                                                                      |                 | •     | •           |      |

| Fig. No. | Barbas Art./ Order No. | Description                                        |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                    |                                                                                      | stainless steel | antr. | rigid       | flex |
| 14       | 302297                 | Twin-wall balanced flue elbow 90°. (ribbed)        |    | •               |       | •           |      |
|          | 346239                 | Twin-wall balanced flue elbow 90°. (segment) BLACK |    |                 | •     | •           |      |
| 15       | 302298                 | Twin-wall balanced flue elbow 45°. (ribbed)        |   | •               |       | •           |      |
|          | 346240                 | Twin-wall balanced flue elbow 45°. (segment) BLACK |  |                 | •     | •           |      |
|          | 329514                 | Twin-wall balanced flue elbow 30°. (ribbed)        |  | •               |       | •           |      |
|          | 346507                 | Twin-wall balanced flue elbow 15°. (segment)       |  | •               |       | •           |      |

| Fig. No. | Barbas Art./ Order No. | Description                                                                                                              |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                                                                          |                                                                                      | stainless steel | antr. | rigid       | flex |
| 16       | 302295                 | Vertical (roof) termination kit, L= 1360 mm. ANTHRACITE                                                                  |    | •               | •     | •           | •    |
| 17       | 302212                 | Adjustable roof flashing. Roof pitch 20° - 45° (**), with lead flashing.                                                 |    | •               |       | •           | •    |
| 18       | 302213                 | Roof flashing for existing chimney or flat roof.                                                                         |   | •               |       | •           | •    |
| 19       | 302296                 | Horizontal (wall) termination kit, L= 600 mm (adjustable), including a set of wall spacer plates. ANTHRACITE             |  | •               | •     | •           | •    |
|          | 346241                 | Horizontal (wall) termination kit, L= 600 mm (adjustable), including a set of wall spacer plates. Stainless steel. BLACK |                                                                                      |                 | •     | •           | •    |
|          | 343949                 | Horizontal (wall) termination kit, L= 600 mm (adjustable), including a set of wall spacer plates. Stainless steel.       |                                                                                      | •               |       | •           | •    |
| 20       | 302293                 | Stainless steel locking band Ø150 mm, quick-fastening.                                                                   |  | •               |       | •           | •    |
| 21       | 302210                 | Silicone seal Ø150 mm.                                                                                                   |  |                 |       | •           | •    |

| Fig. No. | Barbas Art./ Order No. | Description                                                                                                                                                                           |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                                                                                                                                       |                                                                                      | stainless steel | antr. | rigid       | flex |
| 23       | 302215                 | Wall strap.                                                                                                                                                                           |    | •               |       | •           | •    |
| 24       | 302214                 | Set of ceiling finishing plates / Fire stops.                                                                                                                                         |    | •               |       | •           | •    |
| 25       | 302189                 | Ceiling plate for transition Ø100 mm / Ø150 mm rigid - Ø100 mm flex.).                                                                                                                |   | •               |       | •           | •    |
| 26       | 302278                 | Stainless steel adapter piece (100) from appliance to flexible, Ø100 mm external (rigid) x Ø107 mm internal (flex.). [appliance - Ø100 mm flex.] and [Ø100 mm rigid - Ø100 mm flex.]. |  | •               |       |             | •    |
| 27       | 302279                 | Stainless steel adapter piece (150) fire to flexible, Ø148 mm external (rigid) x Ø148 mm internal (flex.) [appliance - Ø150 mm flex.].                                                |  | •               |       |             | •    |
| 28       | 302217                 | Stainless steel locking band Ø150 mm. For adapter 150 [appliance - Ø150 mm (flex.)], Screw-fastening.                                                                                 |                                                                                      | •               |       | •           | •    |
| 29       | 303776                 | Stainless steel screws Ø3.5 mm x 9.5 mm. For securing the flexible concentric flue. (Minimum 3 screws per connection).                                                                |  | •               |       |             | •    |
| 30       | 304041                 | Hose clamp Ø100 mm. (Minimum 2 per connection).                                                                                                                                       |  | •               |       |             | •    |

| Fig. No. | Barbas Art./ Order No. | Description                                                                                  |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                                              |                                                                                      | stainless steel | antr. | rigid       | flex |
| 31       | 304042                 | Hose clamp Ø150 mm. (Minimum 2 per connection)                                               |    | •               |       |             | •    |
| 32       | 302307                 | Vertical (roof) termination kit, L = 610 mm. Suitable for a flexible flue system. ANTHRACITE |    | •               | •     | •           | •    |
| 33       | 302301                 | Concentric T-piece with gauging orifice.                                                     |   | •               |       | •           |      |
| 34       | 302302                 | Concentric pipe with gauging orifice, L = 165 mm.                                            |  | •               |       | •           |      |
| 35       | 302303                 | 90° concentric bend with inspection panel.                                                   |  | •               |       | •           |      |
| 36       | 321948                 | Universal wall / floor support Ø150 mm                                                       |  | •               |       | •           |      |

(\*)Color

- Stainless steel, polished
- antr. : Anthracite or Black color lacquer, matt

(\*\*) Adjustable roof flashing for a slope > 45° can be supplied on request.


When installing a balanced-flue “closed” gas appliance in an existing chimney, ensure stainless steel flexible liners (Ø100 mm or Ø130 mm) conforming with EN 1856-2 are




used to extract the flue gasses. The temperature classification of the flexible pipe must be at least T450.

## 6.3

### Barbas - Muelink & Grol system Ø130 - Ø200

| Fig. No. | Barbas Art./ Order No. | Description                                                          |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                      |                                                                                      | stainless steel | antr. | rigid       | flex |
| 100      | 302319                 | Concentric reduction of Ø130 / Ø200 to Ø100 / Ø150                   |    | •               |       | •           | •    |
| 110      | 302308                 | Twin-wall balanced flue pipe. L= 500 mm.                             |    | •               |       | •           |      |
| 111      | 302309                 | Twin-wall balanced flue pipe. L= 1000 mm.                            |   | •               |       | •           |      |
| 112      | 346509                 | Telescopic twin-wall balanced flue pipe, L= min. 325 / max. 440 mm.  |  | •               |       | •           |      |
|          | 346512                 | Telescopic twin-wall balanced flue pipe, L= min. 965 / max. 1750 mm. |                                                                                      | •               |       | •           |      |
| 113      | 302310                 | Adjustable length twin-wall balanced flue pipe, L= 500 mm.           |  | •               |       | •           |      |

| Fig. No. | Barbas Art./ Order No. | Description                                                                                                        |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                                                                    |                                                                                      | stainless steel | antr. | rigid       | flex |
| 114      | 302314                 | Twin-wall balanced flue elbow 90°. (ribbed)                                                                        |    | •               |       | •           |      |
| 115      | 302315                 | Twin-wall balanced flue elbow 45°. (ribbed)                                                                        |    | •               |       | •           |      |
|          | 346510                 | Twin-wall balanced flue elbow 30°. (ribbed)                                                                        |   | •               |       | •           |      |
|          | 346508                 | Twin-wall balanced flue elbow 15°. (segment)                                                                       |  | •               |       | •           |      |
| 119      | 302313                 | Horizontal (wall) termination kit, L= 600 mm (adjustable), including a set of wall spacer plates. ANTHRACITE       |  | •               | •     | •           |      |
|          | 343950                 | Horizontal (wall) termination kit, L= 600 mm (adjustable), including a set of wall spacer plates. Stainless steel. |                                                                                      | •               |       | •           |      |
| 120      | 302311                 | Stainless steel locking band Ø200 mm, quick-fastening.                                                             |  | •               |       | •           | •    |

| Fig. No. | Barbas Art./ Order No. | Description                                                                                                                                                                           |                                                                                      | Color (*)       |       | Application |      |
|----------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                                                                                                                                                       |                                                                                      | stainless steel | antr. | rigid       | flex |
| 121      | 302248                 | Silicone seal Ø200 mm.                                                                                                                                                                |    |                 |       | •           | •    |
| 123      | 302251                 | Wall strap.                                                                                                                                                                           |    |                 |       | •           | •    |
| 124      | 302250                 | Set of ceiling finishing plates / Fire stops.                                                                                                                                         |    | •               |       | •           | •    |
| 126      | 302281                 | Stainless steel adapter piece (130) from appliance to flexible, Ø130 mm external (rigid) x Ø137 mm internal (flex.). [appliance - Ø130 mm flex.] and [Ø130 mm rigid - Ø130 mm flex.]. |  | •               |       |             | •    |
| 127      | 302282                 | Stainless steel adapter piece (200) appliance to flexible, Ø198 mm external (rigid) x Ø198 mm internal (flex.) [appliance - Ø200 mm flex.].                                           |  | •               |       |             | •    |
| 128      | 302257                 | Stainless steel locking band Ø200 mm. For adapter 200 [appliance - Ø2050 mm (flex.)], Screw-fastening.                                                                                |  | •               |       | •           | •    |
| 129      | 303776                 | Stainless steel screws Ø3.5 mm x 9.5 mm. For securing the flexible concentric flue. (Minimum 3 screws per connection).                                                                |  | •               |       |             | •    |

| Fig. No. | Barbas Art./ Order No. | Description                                     |                                                                                    | Color (*)       |       | Application |      |
|----------|------------------------|-------------------------------------------------|------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                        |                                                 |                                                                                    | stainless steel | antr. | rigid       | flex |
| 130      | 304045                 | Hose clamp Ø130 mm. (Minimum 2 per connection). |  | •               |       |             | •    |
| 131      | 304046                 | Hose clamp Ø200 mm. (Minimum 2 per connection)  |  | •               |       |             | •    |

(\*)Color


- Stainless steel, polished
- antr. : Anthracite or Black color lacquer, matt








(\*\*) Adjustable roof flashing for a slope > 45° can be supplied on request.





When installing a balanced-flue “closed” gas appliance in an existing chimney, ensure stainless steel flexible liners (Ø100 mm or Ø130 mm) conforming with EN 1856-2 are used to extract the flue gasses. The temperature classification of the flexible pipe must be at least T450.

## 6.4

### Poujoulat - DUOGAS system Ø100 - Ø150


| Fig No. | Poujoulat Art./ Order No. | Description                                                         |                                                                                       |
|---------|---------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|         | 34100403                  | Twin-wall balanced flue pipe, L= 250 mm.                            |    |
| 10      | 34100404                  | Twin-wall balanced flue pipe. L= 450 mm.                            |    |
| 11      | 34100405                  | Twin-wall balanced flue pipe. L= 950 mm.                            |   |
| 12      | 34100429                  | Telescopic twin-wall balanced flue pipe, L= min. 390 / max. 640 mm. |  |
| 14      | 34100441                  | Twin-wall balanced flue elbow 90°.                                  |  |
| 15      | 34100421                  | Twin-wall balanced flue elbow 45°.                                  |  |
| 15      | 34100411                  | Twin-wall balanced flue elbow 30°.                                  |  |
| 15      | 34100401                  | Twin-wall balanced flue elbow 15°.                                  |  |


| Fig No. | Poujolat Art./ Order No. | Description                                                              |                                                                                       |
|---------|--------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 16      | 34100654                 | Vertical (roof) termination kit, L= 140 mm .                             |    |
| 17      | 45150171                 | Roof flashing, suitable for a brick roof, with a roof pitch of 15°- 30°. |    |
| 17      | 45150170                 | Roof flashing, suitable for a tiled roof, with a roof pitch of 15°- 30°. |   |
| 17      | 45150172                 | Roof flashing, suitable for a brick roof, with a roof pitch of 30°- 45°. |  |
| 17      | 45150173                 | Roof flashing, suitable for a tiled roof, with a roof pitch of 30°- 45°. |  |
| 18      | 45150169                 | Roof flashing for existing chimney or flat roof.                         |  |
| 19      | 34100610                 | Horizontal (wall) termination kit, L= min. 365 mm / max. 585 mm.         |  |
| 20      | 45150076                 | Stainless steel locking band Ø150 mm, quick-fastening.                   |  |
| 23      | 45150072                 | Wall strap, Ø150 mm.                                                     |  |

| Fig No. | Poujoulat Art./ Order No. | Description                                                                                               |                                                                                       |
|---------|---------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 24      | 37100442                  | Ceiling/wall plate with spacers and ventilation grooves.                                                  |    |
| 24      | 37100425                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 0°- 10°.                       |    |
| 24      | 37100426                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 10°- 30°.                      |    |
| 24      | 37100427                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 30°- 40°.                      |    |
| 24      | 37100428                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 40°- 50°.                      |    |
| 34      | 34100407                  | Concentric pipe with inspection opening, L= 250 mm.                                                       |   |
| 36      | 45150165                  | Roof support, (universal) Ø150 mm.                                                                        |  |
| 36      | 45150081                  | Floor support, (universal) Ø150 mm.                                                                       |  |
| 37      | 34100611                  | Adapter: Barbas Ø100-150 mm → Poujoulat DUOGAS Ø100-150 mm (Appliance 100/150 → Poujoulat DUOGAS 100/150) |  |
| 100     | 34100614                  | Adapter: Barbas Ø130-200 mm → Poujoulat DUOGAS Ø100-150 mm (Appliance 130/200 → Poujoulat DUOGAS 100/150) |  |
| 101     | 34100613                  | Concentric reduction of Poujoulat DUOGAS Ø130-200 mm → Poujoulat DUOGAS Ø100-150 mm                       |  |

## 6.5






### Poujoulat - DUOGAS system Ø130 - Ø200








| Fig No. | Poujoulat Art./ Order No. | Description                                                         |                                                                                       |
|---------|---------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|         | 34130403                  | Twin-wall balanced flue pipe, L= 250 mm.                            |    |
| 110     | 34130404                  | Twin-wall balanced flue pipe. L= 450 mm.                            |    |
| 111     | 34130405                  | Twin-wall balanced flue pipe. L= 950 mm.                            |   |
| 112     | 34130429                  | Telescopic twin-wall balanced flue pipe, L= min. 390 / max. 640 mm. |  |
| 114     | 34130441                  | Twin-wall balanced flue elbow 90°.                                  |  |
| 115     | 34130421                  | Twin-wall balanced flue elbow 45°.                                  |  |
| 115     | 34130411                  | Twin-wall balanced flue elbow 30°.                                  |  |
| 115     | 34130401                  | Twin-wall balanced flue elbow 15°.                                  |  |









| Fig No. | Poujoulat Art./ Order No. | Description                                                                                                |                                                                                       |
|---------|---------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 119     | 34130610                  | Horizontal (wall) termination kit, L= min. 365 mm / max. 585 mm.                                           |    |
| 120     | 45200076                  | Stainless steel locking band Ø200 mm, quick-fastening.                                                     |    |
| 123     | 45200072                  | Wall strap, Ø200 mm.                                                                                       |    |
| 124     | 37130442                  | Ceiling/wall plate with spacers and ventilation grooves.                                                   |    |
| 124     | 37130425                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 0° - 10°.                       |   |
|         | 37130426                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 10° - 30°.                      |                                                                                       |
|         | 37130427                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 30° - 40°.                      |                                                                                       |
|         | 37130428                  | Set of ceiling finishing plates / Fire stops, suitable for a roof pitch of 40° - 50°.                      |                                                                                       |
| 134     | 34130407                  | Concentric pipe with inspection opening, L= 250 mm.                                                        |  |
| 136     | 45200165                  | Roof support, (universal) Ø200 mm.                                                                         |  |
| 136     | 45200081                  | Floor support, (universal) Ø200 mm.                                                                        |  |
| 137     | 34130615                  | Adapter: Barbas Ø130-200 mm → Poujoulat DUOGAS Ø130-200 mm (Appliance 1300/200 → Poujoulat DUOGAS 130/200) |  |





## 6.6

### Ontop - Metaloterm US system Ø100 - Ø150

| Fig. No. | Ontop Art. / Order No. | Description                                                            |                                                                                       |
|----------|------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          | USA 10                 | Adapter for Barbas appliances with Ø100-Ø150 mm concentric connection. |    |
|          | US 25 10               | Twin-wall balanced flue pipe, L = 250 mm.                              |    |
| 10       | US 50 10               | Twin-wall balanced flue pipe. L= 500 mm.                               |                                                                                       |
| 11       | US 100 10              | Twin-wall balanced flue pipe. L= 1000 mm.                              |   |
| 12       | USPP 10                | Telescopic twin-wall balanced flue pipe, L= min. 60 / max. 250 mm.     |  |
| 14       | USB 90 10              | Twin-wall balanced flue elbow 90°.                                     |  |
| 15       | USB 45 10              | Twin-wall balanced flue elbow 45°.                                     |  |
| 15       | USB 30 10              | Twin-wall balanced flue elbow 30°.                                     |  |



| Fig. No. | Ontop Art. / Order No. | Description                                                         |                                                                                       |
|----------|------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 15       | USB 15 10              | Twin-wall balanced flue elbow 15°.                                  |    |
| 16       | USDVC2 10              | Vertical (roof) termination kit, L= 375 mm.                         |    |
| 16       | USSR 10                | Storm collar Ø150 mm.                                               |    |
| 17       | USLS 10                | Adjustable roof flashing. Roof pitch 20° - 45°, with lead flashing. |  |
| 17       | USDH 10                | Roof flashing plate for roof pitch 5° - 30°.                        |  |
| 18       | USDP 10                | Roof flashing for existing chimney or flat roof.                    |  |
| 18       | USDPAL 10              | Roof flashing - Aluminum - For existing chimney or flat roof.       |  |
| 19       | USDHC5 10              | Horizontal (wall) termination kit, L= 475 mm (adjustable).          |  |
| 20       | USKB 10                | Locking band, quick-fastening.                                      |  |









| Fig. No. | Ontop Art. / Order No. | Description                                                     |                                                                                       |
|----------|------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 21       | USAB 10                | Cover band, screw-fastening.                                    |    |
| 23       | USMB 10                | Wall strap, adjustable.                                         |    |
| 23       | USEB 10                | Fitting bracket.                                                |    |
| 24       | USCP 10                | Set of ceiling finishing plates / Fire stops /Centering plates. |   |
| 24       | USDQ 10                | Roof support.                                                   |  |
| 25       | USSAN 10               | Renovation set.                                                 |  |
| 25       | USSAN1 10              | Top of renovation set.                                          |  |
| 25       | USSAN2 10              | Bottom renovation set.                                          |  |





| Fig. No. | Ontop Art. / Order No. | Description                                          |                                                                                       |
|----------|------------------------|------------------------------------------------------|---------------------------------------------------------------------------------------|
| 28       | USKBS 10               | Locking band, screw-fastening.                       |    |
|          | USI 10                 | Concentric pipe with inspection panel, L= 250 mm.    |    |
| 34       | USEM 10                | Concentric pipe with gauging orifice, L= 150 mm.     |    |
| 35       | USBI 10                | 90° concentric bend with inspection panel.           |   |
|          | USR 10                 | Rosette smooth Ø150 mm.                              |  |
|          | USMPG 10               | Wall plate large Ø150 mm, square 300 mm.             |  |
|          | USAH 10                | Spacer bracket.                                      |  |
|          | USVG 10 13             | Concentric reduction of Ø100-Ø150 mm → Ø130-Ø200 mm. |  |



## 6.7

### Ontop - Metaloterm US system Ø130 - Ø200

| Fig. No. | Ontop Art. / Order No. | Description                                                            |                                                                                       |
|----------|------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          | USA 13                 | Adapter for Barbas appliances with Ø130-Ø200 mm concentric connection. |    |
|          | US 25 13               | Twin-wall balanced flue pipe, L = 250 mm.                              |    |
| 110      | US 50 13               | Twin-wall balanced flue pipe. L= 500 mm.                               |                                                                                       |
| 111      | US 100 13              | Twin-wall balanced flue pipe. L= 1000 mm.                              |   |
| 112      | USPP 13                | Telescopic twin-wall balanced flue pipe, L= min. 60 / max. 250 mm.     |  |
| 114      | USB 90 13              | Twin-wall balanced flue elbow 90°.                                     |  |
| 115      | USB 45 13              | Twin-wall balanced flue elbow 45°.                                     |  |
| 115      | USB 30 13              | Twin-wall balanced flue elbow 30°.                                     |  |

| Fig. No. | Ontop Art. / Order No. | Description                                                         |                                                                                       |
|----------|------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 115      | USB 15 13              | Twin-wall balanced flue elbow 15°.                                  |    |
| 116      | USDVC2 13              | Vertical (roof) termination kit, L= 375 mm.                         |    |
| 116      | USSR 13                | Storm collar Ø150 mm.                                               |    |
| 117      | USLS 13                | Adjustable roof flashing. Roof pitch 20° - 45°, with lead flashing. |  |
| 117      | USDH 13                | Roof flashing plate for roof pitch 5° - 30°.                        |  |
| 118      | USDP 13                | Roof flashing for existing chimney or flat roof.                    |  |
| 118      | USDPAL 13              | Roof flashing - Aluminum - For existing chimney or flat roof.       |  |
| 119      | USDHC4 13              | Horizontal (wall) termination kit, L= 475 mm (adjustable).          |  |
| 120      | USKB 13                | Locking band, quick-fastening.                                      |  |

| Fig. No. | Ontop Art. / Order No. | Description                                                     |                                                                                       |
|----------|------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 121      | USAB 13                | Cover band, screw-fastening.                                    |    |
| 123      | USMB 13                | Wall strap, adjustable.                                         |    |
| 123      | USEB 13                | Fitting bracket.                                                |    |
| 124      | USCP 13                | Set of ceiling finishing plates / Fire stops /Centering plates. |   |
| 124      | USDQ 13                | Roof support.                                                   |  |
| 125      | USSAN 13               | Renovation set.                                                 |  |
| 125      | USSAN1 13              | Top of renovation set.                                          |  |
| 125      | USSAN1 13              | Bottom renovation set.                                          |  |

| Fig. No. | Ontop Art. / Order No. | Description                                       |                                                                                       |
|----------|------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------|
| 128      | USKBS 13               | Locking band, screw-fastening.                    |    |
|          | USI 13                 | Concentric pipe with inspection panel, L= 250 mm. |    |
| 134      | USEM 13                | Concentric pipe with gauging orifice, L= 150 mm.  |    |
| 135      | USBI 13                | 90° concentric bend with inspection panel.        |   |
|          | USR 13                 | Rosette smooth Ø200 mm.                           |  |
|          | USMPG 13               | Wall plate large Ø200 mm, square 350 mm.          |  |




| Fig. No. | Ontop Art. / Order No. | Description                                          |                                                                                     |
|----------|------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------|
|          | USAH 13                | Spacer bracket.                                      |  |
|          | USVG 13 10             | Concentric reduction of Ø130-Ø200 mm → Ø100-Ø150 mm. |  |



## 6.8

### Jeremias/STB - H-Twin system Ø100 - Ø150

| Fig. No. | Jeremias Art. / Order No. | Description                                                           |                                                                                       |
|----------|---------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 11       | ATWINL 13100-150          | Twin-wall balanced flue pipe. L= 1000 mm.                             |    |
| 10       | ATWINL 14100-150          | Twin-wall balanced flue pipe. L= 500 mm.                              |   |
| 10       | ATWINL 15100-150          | Twin-wall balanced flue pipe. L= 250 mm.                              |  |
| 12       | H-TWIN 742100-150         | Telescopic twin-wall balanced flue pipe, L= min. 1100 / max. 1400 mm. |  |
| 12       | H-TWIN 467100-150         | Telescopic twin-wall balanced flue pipe, L= min. 1100 / max. 1900 mm. |                                                                                       |
| 12       | ATWIN 197100-150          | Telescopic twin-wall balanced flue pipe, L= min. 600 / max. 900 mm.   |  |
| 15       | ATWIN 16 100-150          | Twin-wall balanced flue elbow 15°.                                    |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                 |                                                                                       |
|----------|---------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 15       | ATWIN 17<br>100-150       | Twin-wall balanced flue elbow 30°.                                                          |    |
| 15       | ATWIN 18<br>100-150       | Twin-wall balanced flue elbow 45°.                                                          |    |
| 14       | ATWIN<br>60100-150        | Twin-wall balanced flue elbow 90°.                                                          |   |
| 14       | ATWIN<br>60F100-150       | Twin-wall balanced flue elbow 90° - Short. Especially for connection to a wall termination. |  |
| 16       | A<br>463100-150           | Roof termination - long, with pipe, L = 1080 mm, Vertical.                                  |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                              |                                                                                       |
|----------|---------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 16       | ATWIN 92100-150           | Roof termination - short with pipe, L = 300 mm, Vertical.                                                |    |
| 32       | ATWIN 92pe100-150         | Roof termination, with pipe, L = 495 mm, Vertical, with roof flashing for existing chimney or flat roof. |    |
| 17       | ATWIN 45DD 100-150        | Roof flashing for roof pitch 30°, with lead flashing and storm collar.                                   |   |
| 17       | ATWIN 60DD 100-150        | Roof flashing for roof pitch 45°, with lead flashing and storm collar.                                   |  |
|          | ATWIN 307 100-150         | Storm collar.                                                                                            |  |
| 24       | ADBL-DW100-150            | Set of ceiling finishing plates / Fire stops.                                                            |  |
| 20       | ATWIN 45100-150           | Locking band, Screw-fastening (Standard on all components).                                              |  |
| 23       | ATWIN 22100-150           | Wall strap, adjustable.                                                                                  |  |
| 23       | ATWIN 23100-150           | Wall strap, distance adjustable 60-250 mm.                                                               |  |


| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                      |                                                                                       |
|----------|---------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 19       | A681100-150               | Horizontal (wall) termination kit, L= 495 mm (horizontally adjustable), including one set of wall spacer plates. |    |
| 33       | H-TWIN 752100-150         | Concentric T-piece with gauging orifice. Inspection panel with cover cap and condensation-opening.               |    |
|          | ATWIN 465 100-150         | Adapter: H-TWIN Ø100-150 → Flex Stainless steel ; Ø100 mm Incl. Ceiling plate 300x300 mm.                        |    |
|          | ATWIN 466100-150          | Adapter: Flex Stainless steel; Ø100 mm → H-TWIN Ø100-150 Incl. Chimney(ceiling)plate 300x300 mm.                 |   |
| 36       | ASDH2 100-150             | Universal wall / floor support Ø150 mm.                                                                          |  |
| 100      | A464 130                  | Concentric reduction of H-TWIN Ø130 / Ø200 mm → H-TWIN Ø100 / Ø150 mm.                                           |  |

## 6.9

### Jeremias/STB - H-Twin system Ø130 - Ø200

| Fig. No. | Jeremias Art. / Order No. | Description                                                           |                                                                                       |
|----------|---------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 111      | ATWINL 13130-200          | Twin-wall balanced flue pipe. L= 1000 mm.                             |    |
| 110      | ATWINL 14130-200          | Twin-wall balanced flue pipe. L= 500 mm.                              |   |
| 110      | ATWINL 15130-200          | Twin-wall balanced flue pipe. L= 250 mm.                              |  |
| 112      | H-TWIN 742130-200         | Telescopic twin-wall balanced flue pipe, L= min. 1100 / max. 1400 mm. |  |
| 112      | H-TWIN 467130-200         | Telescopic twin-wall balanced flue pipe, L= min. 1100 / max. 1900 mm. |                                                                                       |
| 112      | ATWIN 197130-200          | Telescopic twin-wall balanced flue pipe, L= min. 600 / max. 900 mm.   |  |
| 115      | ATWIN 16 130-200          | Twin-wall balanced flue elbow 15°.                                    |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                      |                                                                                       |
|----------|---------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 115      | ATWIN 17<br>130-200       | Twin-wall balanced flue elbow 30°.                                                                               |    |
| 115      | ATWIN 18<br>130-200       | Twin-wall balanced flue elbow 45°.                                                                               |    |
| 114      | ATWIN<br>60130-200        | Twin-wall balanced flue elbow 90°.                                                                               |   |
| 114      | ATWIN<br>60F130-200       | Twin-wall balanced flue elbow 90° - Short. Especially for connection to a wall termination.                      |  |
| 124      | ADBL-<br>DW130-200        | Set of ceiling finishing plates / Fire stops.                                                                    |  |
| 120      | ATWIN<br>45130-200        | Locking band, Screw-fastening (Standard on all components).                                                      |  |
| 123      | ATWIN<br>22130-200        | Wall strap, adjustable.                                                                                          |  |
| 123      | ATWIN<br>23130-200        | Wall strap, distance adjustable 60-250 mm.                                                                       |  |
| 119      | A681130-200               | Horizontal (wall) termination kit, L= 495 mm (horizontally adjustable), including one set of wall spacer plates. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                        |                                                                                       |
|----------|---------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 133      | H-TWIN<br>752130-200      | Concentric T-piece with gauging orifice. Inspection panel with cover cap and condensation-opening. |    |
|          | ATWIN 465<br>130-200      | Adapter: H-TWIN Ø130-200 → Flex Stainless steel ; Ø130 mm Incl. Ceiling plate 300x300 mm.          |    |
|          | ATWIN<br>466130-200       | Adapter: Flex Stainless steel; Ø130 mm → H-TWIN Ø130-200 Incl. Chimney(ceiling)plate 300x300 mm.   |    |
| 136      | ASDH2<br>130-200          | Universal wall / floor support Ø200 mm.                                                            |   |
| 100      | A464 130                  | Concentric reduction of H-TWIN Ø130 / Ø200 mm → H-TWIN Ø100 / Ø150 mm.                             |  |





## 6.10


### Jeremias - TWIN-GAS system Ø100 - Ø150




| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                                         |                                                                                       |
|----------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          | TWG163410-0-150           | Barbas Appliance connection / Adapter Barbas Ø100/150 mm → Jeremias TWIN-GAS Ø100/150 mm - L = 160 mm. Including locking band (2x). |    |
| 11       | TWG13100-150              | Twin-wall balanced flue pipe, L = 1000 mm. Including locking band.                                                                  |   |
| 10       | TWG14100-150              | Twin-wall balanced flue pipe, L = 500 mm. Including locking band.                                                                   |  |
| 10       | TWG15100-150              | Twin-wall balanced flue pipe, L = 250 mm. Including locking band.                                                                   |  |
|          | TWG180110-0-150           | Twin-wall balanced flue pipe, L = 1000 mm with 4 spacer brackets on the outside. Including locking band.                            |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                                             |                                                                                       |
|----------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 12       | TWG50100-150              | Telescopic twin-wall balanced flue pipe, L= min. 330 / max. 420 mm. Including locking band.                                             |    |
| 15       | TWG16100-150              | Twin-wall balanced flue elbow 15°. Including locking band.                                                                              |    |
| 15       | TWG17100-150              | Twin-wall balanced flue elbow 30°. Including locking band.                                                                              |    |
| 15       | TWG18100-150              | Twin-wall balanced flue elbow 45°. Including locking band.                                                                              |   |
| 14       | TWG60100-150              | Twin-wall balanced flue elbow 90°. Including locking band.                                                                              |  |
| 14       | TWG178610-0-150           | Twin-wall balanced flue elbow 90° - with support leg Including locking band and sealing cap under.                                      |  |
| 14       | TWG167610-0-150           | Twin-wall balanced flue elbow 90° - short - eccentric. Especially for connection to a wall termination TWG1619. Including locking band. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                   |                                                                                       |
|----------|---------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 16       | TWG272100-150             | Roof termination (vertical) L= 615 mm. Including locking band.                                                |    |
| 17       | TW53150                   | Roof flashing with a roof pitch of 5° - 15° with flex. alu-flashing and storm collar.                         |    |
| 17       | TW59 150                  | Roof flashing with a roof pitch of 16° - 25° with flex. alu-flashing and storm collar.                        |   |
| 17       | TW38 150                  | Roof flashing with a roof pitch of 26° - 35° with flex. alu-flashing and storm collar.                        |  |
| 17       | TW54 150                  | Roof flashing with a roof pitch of 36° - 45° with flex. alu-flashing and storm collar.                        |  |
| 18       | TW52150                   | Roof flashing for existing chimney or flat roof with storm collar.                                            |  |
|          | KL72150                   | Storm collar (spare part).                                                                                    |  |
| 19       | TWG161910 0-150           | Wall termination kit, L= 600 mm (horizontal)Adjustable. Incl. locking band and one set of wall spacer plates. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                  |                                                                                       |
|----------|---------------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 20       | TW45150                   | Locking band, screw-fastening (spare part).                                  |    |
| 21       | ALBI26150                 | Silicone sealing ring for outer pipe (spare part).                           |    |
| 23       | ZU-WA704150               | Wall strap. Distance to the wall: WA= 50 mm.                                 |    |
|          | ZU-WA891130               | Extension pieces for the wall strap ZUWA704, L= 130 mm.                      |    |
|          | ZU-WA891200               | Extension pieces for the wall strap ZUWA704, L= 200 mm.                      |   |
|          | ZU-WA891250               | Extension pieces for the wall strap ZUWA704, L= 250 mm.                      |  |
|          | ZUWA706                   | Extension pieces for the wall strap ZUWA704, L= 400 mm, WA = 50 - 360 mm.    |  |
| 24       | ZU-DA074150               | Set of ceiling finishing plates / Fire stops for a flat roof : 0°.           |  |
| 24       | ZU-DA99V150               | Set of ceiling finishing plates / Fire stops for a pitched roof : 0° - 30°.  |  |
| 24       | ZU-DA98V150               | Set of ceiling finishing plates / Fire stops for a pitched roof : 31° - 45°. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                            |                                                                                       |
|----------|---------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 24       | ZU-DA99VHL150             | Set of ceiling finishing plates / Fire stops with ventilation openings for a pitched roof : 0° - 30°.  |    |
| 24       | ZU-DA98VHL150             | Set of ceiling finishing plates / Fire stops with ventilation openings for a pitched roof : 31° - 45°. |    |
| 25       | FD08 100                  | Adapter: TWIN-GAS to FLEX. (only for the inner pipe Ø100 mm).                                          |    |
| 25       | TWG1276D 100-150          | Chimney-/flat roof-/ceiling - plate with adapter: FLEX to TWIN-GAS.                                    |   |
| 25       | ZU-WA1618100              | Adapter: TWIN-GAS to 'Schacht' (DE).                                                                   |  |
| 25       | TWG173210 0-150           | Chimney-/flat roof-/ceiling - plate with adapter: Ø100 rigid/flex. to TWIN-GAS .                       |  |
| 33       | TWG317100-150             | Concentric T-piece 90°. Including locking band.                                                        |  |
| 34       | TWG51100-150              | Concentric pipe with gauging orifice, L= 200 mm. Including locking band.                               |  |
| 35       | TWG10 100-150             | Concentric pipe, L= 300 mm with cleaning opening/inspection panel. Including locking band.             |  |
| 35       | TWG19100-150              | Concentric elbow 90° with cleaning opening/inspection panel. Including locking band.                   |  |
| 36       | TWG05100-150              | Base plate/Cover-under with 2x ½" gauging orifice, sealing cap and condensate drain at the bottom.     |  |




| Fig. No. | Jeremias Art. / Order No. | Description                                                                                              |                                                                                       |
|----------|---------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 36       | TWG07100-150              | Base plate / floor support.                                                                              |    |
|          | DW391                     | Wall support with transverse support Type I: 350 mm<br>- Distance to wall: WA= max. 50 mm.               |    |
|          | DW392                     | Wall support with transverse support Type II: 500 mm<br>- Distance to wall: WA= 50 - 150 mm.             |    |
|          | DW393                     | Wall support with transverse support Type III: 750 mm<br>- Distance to wall: WA= 150 - 250 mm.           |    |
|          | DW407                     | Wall support with transverse support Type IV: 1030 mm<br>- Distance to wall: WA= 250 - 360 mm.           |   |
| (17-24)  | LUX-ECO150                | Insulation roof flashing, L= Max. 500 mm (adjustable).<br>Wall thickness LUX-ECO Insulation: min. 25 mm. |  |
| (19)     | LUX-ECO150                | Insulation wall flashing, L= Max. 360 mm (adjustable).<br>Wall thickness LUX-ECO Insulation: min. 25 mm. |  |

## 6.11


### Jeremias - TWIN-GAS system Ø130 - Ø200

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                                        |                                                                                       |
|----------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          | TWG163413<br>0-200        | Barbas Appliance connection / Adapter Barbas Ø130/200 mm → Jeremias TWIN-GAS Ø130/200 mm. L = 160 mm. Including locking band (2x). |    |
| 111      | TWG13130-<br>200          | Twin-wall balanced flue pipe, L = 1000 mm. Including locking band.                                                                 |   |
| 110      | TWG14130-<br>200          | Twin-wall balanced flue pipe, L = 500 mm. Including locking band.                                                                  |  |
| 110      | TWG15130-<br>200          | Twin-wall balanced flue pipe, L = 250 mm. Including locking band.                                                                  |  |
|          | TWG180113<br>0-200        | Twin-wall balanced flue pipe, L = 1000 mm with 4 spacer brackets on the outside. Including locking band.                           |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                                             |                                                                                       |
|----------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 112      | TWG50130-200              | Telescopic twin-wall balanced flue pipe, L= min. 330 / max. 420 mm. Including locking band.                                             |    |
| 115      | TWG16130-200              | Twin-wall balanced flue elbow 15°. Including locking band.                                                                              |    |
| 115      | TWG17130-200              | Twin-wall balanced flue elbow 30°. Including locking band.                                                                              |    |
| 115      | TWG18130-200              | Twin-wall balanced flue elbow 45°. Including locking band.                                                                              |   |
| 114      | TWG60130-200              | Twin-wall balanced flue elbow 90°. Including locking band.                                                                              |  |
| 114      | TWG1786130-200            | Twin-wall balanced flue elbow 90° - with support leg Including locking band and sealing cap under.                                      |  |
| 114      | TWG1676130-200            | Twin-wall balanced flue elbow 90° - short - eccentric. Especially for connection to a wall termination TWG1619. Including locking band. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                                   |                                                                                       |
|----------|---------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 116      | TWG272130-200             | Roof termination (vertical) L= 615 mm. Including locking band.                                                |    |
| 117      | TW53200                   | Roof flashing with a roof pitch of 5° - 15° with flex. alu-flashing and storm collar.                         |    |
| 117      | TW59 200                  | Roof flashing with a roof pitch of 16° - 25° with flex. alu-flashing and storm collar.                        |   |
| 117      | TW38 200                  | Roof flashing with a roof pitch of 26° - 35° with flex. alu-flashing and storm collar.                        |  |
| 117      | TW54 200                  | Roof flashing with a roof pitch of 36° - 45° with flex. alu-flashing and storm collar.                        |  |
| 118      | TW52200                   | Roof flashing for existing chimney or flat roof with storm collar.                                            |  |
|          | KL72200                   | Storm collar (spare part).                                                                                    |  |
| 119      | TWG161913 0-200           | Wall termination kit, L= 600 mm (horizontal)Adjustable. Incl. locking band and one set of wall spacer plates. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                  |                                                                                       |
|----------|---------------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 120      | TW45200                   | Locking band, screw-fastening (spare part).                                  |    |
| 121      | ALBI26200                 | Silicone sealing ring for outer pipe (spare part).                           |    |
| 123      | ZU-WA704200               | Wall strap. Distance to the wall: WA= 50 mm.                                 |    |
|          | ZU-WA891130               | Extension pieces for the wall strap ZUWA704, L= 130 mm.                      |    |
|          | ZU-WA891200               | Extension pieces for the wall strap ZUWA704, L= 200 mm.                      |   |
|          | ZU-WA891250               | Extension pieces for the wall strap ZUWA704, L= 250 mm.                      |  |
|          | ZUWA706                   | Extension pieces for the wall strap ZUWA704, L= 400 mm, WA = 50 - 360 mm.    |  |
| 124      | ZU-DA074200               | Set of ceiling finishing plates / Fire stops for a flat roof : 0°.           |  |
| 124      | ZU-DA99V200               | Set of ceiling finishing plates / Fire stops for a pitched roof : 0° - 30°.  |  |
| 124      | ZU-DA98V200               | Set of ceiling finishing plates / Fire stops for a pitched roof : 31° - 45°. |  |

| Fig. No. | Jeremias Art. / Order No. | Description                                                                                            |                                                                                       |
|----------|---------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 124      | ZU-DA99VHL200             | Set of ceiling finishing plates / Fire stops with ventilation openings for a pitched roof : 0° - 30°.  |    |
| 124      | ZU-DA98VHL200             | Set of ceiling finishing plates / Fire stops with ventilation openings for a pitched roof : 31° - 45°. |    |
| 125      | FD08 130                  | Adapter: TWIN-GAS to FLEX. (only for the inner pipe Ø100 mm).                                          |    |
| 125      | TWG1276D 130-200          | Chimney-/flat roof-/ceiling - plate with adapter: FLEX to TWIN-GAS.                                    |   |
| 125      | ZU-WA1618130              | Adapter: TWIN-GAS to 'Schacht' (DE).                                                                   |  |
| 125      | TWG1732130-200            | Chimney-/flat roof-/ceiling - plate with adapter: Ø100 rigid/flex. to TWIN-GAS .                       |  |
| 133      | TWG317130-200             | Concentric T-piece 90°. Including locking band.                                                        |  |
| 134      | TWG51130-200              | Concentric pipe with gauging orifice, L= 200 mm. Including locking band.                               |  |
| 135      | TWG10 130-200             | Concentric pipe, L= 300 mm with cleaning opening/inspection panel. Including locking band.             |  |
| 135      | TWG19130-200              | Concentric elbow 90° with cleaning opening/inspection panel. Including locking band.                   |  |
| 136      | TWG05130-200              | Base plate/Cover-under with 2x ½" gauging orifice, sealing cap and condensate drain at the bottom.     |  |





| Fig. No. | Jeremias Art. / Order No. | Description                                                                                              |                                                                                       |
|----------|---------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 136      | TWG07130-200              | Base plate / floor support.                                                                              |    |
|          | DW391                     | Wall support with transverse support Type I: 350 mm<br>- Distance to wall: WA= max. 50 mm.               |    |
|          | DW392                     | Wall support with transverse support Type II: 500 mm<br>- Distance to wall: WA= 50 - 150 mm.             |    |
|          | DW393                     | Wall support with transverse support Type III: 750 mm<br>- Distance to wall: WA= 150 - 250 mm.           |    |
|          | DW407                     | Wall support with transverse support Type IV: 1030 mm<br>- Distance to wall: WA= 250 - 360 mm.           |   |
| 100      | TWGR                      | Concentric reduction Jeremias TWIN-GAS Ø130/Ø200<br>→ Jeremias TWIN-GAS Ø100/Ø150                        |  |
|          | LUX-ECO200                | Insulation roof flashing, L= Max. 500 mm (adjustable).<br>Wall thickness LUX-ECO Insulation: min. 25 mm. |  |
| (119)    | LUX-ECO200                | Insulation wall flashing, L= Max. 360 mm(adjustable).<br>Wall thickness LUX-ECO Insulation: min. 25 mm.  |  |




## 6.12





## Modinox - PLA system Ø100 - Ø153



| Fig. No. | Modinox Art./ Order No. | Description                                                                                                |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                            |                                                                                      | stainless steel | antr. | rigid       | flex |
|          | 2PLAMAFM100BEL          | Barbas appliance connection: Adapter Barbas Ø100/150 mm → Modinox PLA Ø100/153 mm. L= 230 mm. INOX         |    | •               |       | •           |      |
|          | 2PLAMAFM100BELNO        | Barbas appliance connection: Adapter Barbas Ø100/150 mm → Modinox PLA Ø100/153 mm. L= 230 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 10       | 2PLAELDR100250          | Twin-wall balanced flue pipe, L= 250 mm., INOX                                                             |  | •               |       | •           |      |
|          | 2PLAELDR100250NO        | Twin-wall balanced flue pipe, L= 250 mm., INOX - BLACK                                                     |                                                                                      |                 | •     | •           |      |
| 10       | 2PLAELDR100330          | Twin-wall balanced flue pipe, L= 330 mm., INOX                                                             |  | •               |       | •           |      |
|          | 2PLAELDR100330NO        | Twin-wall balanced flue pipe, L= 330 mm., INOX - BLACK                                                     |                                                                                      |                 | •     | •           |      |
| 10       | 2PLAELDR100500          | Twin-wall balanced flue pipe, L= 500 mm., INOX                                                             |  | •               |       | •           |      |
|          | 2PLAELDR100500NO        | Twin-wall balanced flue pipe, L= 500 mm., INOX - BLACK                                                     |                                                                                      |                 | •     | •           |      |



| Fig. No. | Modinox Art./ Order No. | Description                                                                       |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                   |                                                                                      | stainless steel | antr. | rigid       | flex |
| 11       | 2PLAELDR1001000         | Twin-wall balanced flue pipe, L= 1000 mm., INOX                                   |    | •               |       | •           |      |
|          | 2PLAELDR1001000NO       | Twin-wall balanced flue pipe, L= 1000 mm., INOX - BLACK                           |                                                                                      |                 | •     | •           |      |
| 12       | 2PLAELRE100500          | Telescopic twin-wall balanced flue pipe, L= min. 300 / max. 500 mm., INOX         |   | •               |       | •           |      |
|          | 2PLAELRE100500NO        | Telescopic twin-wall balanced flue pipe, L= min. 300 / max. 500 mm., INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 14       | 2PLACO90100             | Twin-wall balanced flue elbow 90°, INOX                                           |  | •               |       | •           |      |
|          | 2PLACO90100NO           | Twin-wall balanced flue elbow 90°, INOX - BLACK                                   |                                                                                      |                 | •     | •           |      |
| 15       | 2PLACO45100             | Twin-wall balanced flue elbow 45°, INOX                                           |  | •               |       | •           |      |
|          | 2PLACO45100NO           | Twin-wall balanced flue elbow 45°, INOX - BLACK                                   |                                                                                      |                 | •     | •           |      |
| 15       | 2PLACO30100             | Twin-wall balanced flue elbow 30°, INOX                                           |  | •               |       | •           |      |
|          | 2PLACO30100NO           | Twin-wall balanced flue elbow 30°, INOX - BLACK                                   |                                                                                      |                 | •     | •           |      |




| Fig. No. | Modinox Art./ Order No. | Description                                              |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                          |                                                                                      | stainless steel | antr. | rigid       | flex |
| 15       | 2PLACO15100             | Twin-wall balanced flue elbow 15°, IN-OX                 |    | •               |       | •           |      |
|          | 2PLACO15100NO           | Twin-wall balanced flue elbow 15°, IN-OX - BLACK         |                                                                                      |                 | •     | •           |      |
| 16       | 2PLACHAR100             | Vertical (roof) termination cap, L= 360 mm, INOX         |    | •               |       | •           |      |
|          | 2PLACHAR100NO           | Vertical (roof) termination cap, L= 360 mm, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 17       | 2DIVS5IN150             | Roof flashing for a roof pitch of 5°- 30°, IN-OX         |   | •               |       | •           |      |
|          | 2DIVS5IN150NO           | Roof flashing for a roof pitch of 5°- 30°, IN-OX - BLACK |                                                                                      |                 | •     | •           |      |
| 17       | 2DIVS3IN150             | Roof flashing for a roof pitch of 31°- 45°, INOX         |  | •               |       | •           |      |
|          | 2DIVS3IN150NO           | Roof flashing for a roof pitch of 31°- 45°, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 17       | 2DIVRTS1                | Roof tile fitting for roof flashing                      |  |                 | •     | •           |      |
| 17       | 2DIVCSOL153             | Collar for roof flashing, IN-OX                          |  | •               |       | •           |      |
|          | 2DIVCSOL153NO           | Collar for roof flashing, IN-OX - BLACK                  |                                                                                      | •               |       | •           |      |
|          | 2DIVJOCO155             | Sealing ring for collar roof flashing                    |                                                                                      |                 |       | •           |      |



| Fig. No. | Modinox Art./ Order No. | Description                                                                                       |                                                                                      | Color (*)      |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------|-------|-------------|------|
|          |                         |                                                                                                   |                                                                                      | stainles steel | antr. | rigid       | flex |
| 17       | 2DIVS5PS160             | Roof flashing, standard model, lead: 0,6mm thick, for a roof pitch of 5° - 30°, with INOX cone    |    | •              |       | •           |      |
|          | 2DIVS5PR160             | Roof flashing, large tile model, lead: 1,0mm thick, for a roof pitch of 5° - 30°, with INOX cone  |                                                                                      | •              |       | •           |      |
|          | 2DIVS3PS160             | Roof flashing, standard model, lead: 0,6mm thick, for a roof pitch of 31° - 45°, with INOX cone   |                                                                                      | •              |       | •           |      |
|          | 2DIVS3PR160             | Roof flashing, large tile model, lead: 1,0mm thick, for a roof pitch of 31° - 45°, with INOX cone |                                                                                      | •              |       | •           |      |
| 17       | 2DIVC5LA153NO           | Cone cover for roof flashing, lead, for a roof pitch of 5° - 30°, INOX - BLACK                    |  |                | •     | •           |      |
|          | 2DIVC3LA153NO           | Cone cover for roof flashing, lead, for a roof pitch of 31° - 45°, INOX - BLACK                   |                                                                                      |                | •     | •           |      |
| 18       | 2DIVSOIN150             | Roof flashing for existing chimney or flat roof, INOX                                             |  | •              |       | •           |      |
|          | 2DIVSOIN150NO           | Roof flashing for existing chimney or flat roof, INOX - BLACK                                     |                                                                                      |                | •     | •           |      |

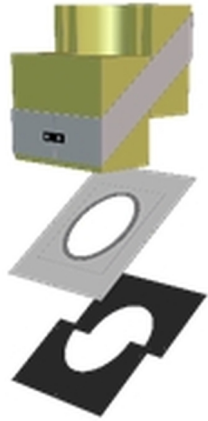

| Fig. No. | Modinox Art./ Order No. | Description                                                                                  |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                              |                                                                                      | stainless steel | antr. | rigid       | flex |
| 19       | 2PLATHOR100             | Horizontal (wall) termination kit, with rosettes, L= min. 580 mm / max. 780 mm. INOX         |    | •               |       | •           |      |
|          | 2PLATHOR100NO           | Horizontal (wall) termination kit, with rosettes, L= min. 580 mm / max. 780 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 20       | 2PLACOJO100             | Locking band, quick-fastening. INOX                                                          |    | •               |       | •           |      |
|          | 2PLACOJO100NO           | Locking band, quick-fastening. INOX - BLACK                                                  |                                                                                      |                 | •     | •           |      |
| 21       | 2PLAJOIF100             | Fiber seal                                                                                   |  |                 |       | •           |      |
| 23       | 2PLACOMU100             | Wall strap, INOX                                                                             |  | •               |       | •           |      |
|          | 2PLACOMU100NO           | Wall strap, INOX - BLACK                                                                     |                                                                                      |                 | •     | •           |      |
| 23       | 2PLASUPLR100            | Wall support, quick fastening                                                                |  | •               |       | •           |      |
| 24       | 2PLACOCF100             | Set of ceiling finishing plates / Fire stops                                                 |  | •               |       | •           |      |
| 24       | 2PLAPVEN100             | Ceiling finishing plate with ventilation openings                                            |  | •               |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                   |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                               |                                                                                      | stainless steel | antr. | rigid       | flex |
| 24       | 2PLAROSA100BT           | Rosette, IN-OX                                                |    | •               |       | •           |      |
|          | 2PLAROSA100BTNO         | Rosette, IN-OX - BLACK                                        |                                                                                      |                 | •     | •           |      |
|          | 2PLAROSA100BTBL         | Rosette, IN-OX - WHITE                                        |                                                                                      |                 |       | •           |      |
| 24       | 2PLAROSA100             | Rosette with 4 mounting holes, INOX                           |    | •               |       | •           |      |
|          | 2PLAROSA100NO           | Rosette with 4 mounting holes, INOX - BLACK                   |                                                                                      |                 | •     | •           |      |
|          | 2PLAROSA100BL           | Rosette with 4 mounting holes, INOX - WHITE                   |                                                                                      |                 |       | •           |      |
| 34       | 2PLAEMES100             | Concentric pipe with gauging orifice, L= 250 mm, INOX         |  | •               |       | •           |      |
|          | 2PLAEMES100NO           | Concentric pipe with gauging orifice, L= 250 mm, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 35       | 2PLAERAM100             | Concentric pipe with inspection/cleaning opening, L= 260 mm.  |  | •               |       | •           |      |
| 36       | 2PLACOSO100             | Floor support strap                                           |  | •               |       | •           |      |
| 36       | 2PLACTOS100             | Roof strap                                                    |  | •               |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                                                      |                                                                                      | Color (*)      |       | Application |      |
|----------|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------|-------|-------------|------|
|          |                         |                                                                                                  |                                                                                      | stainles steel | antr. | rigid       | flex |
| 36       | 2PLAEPDS100             | Clearance roof/floor pas-sage                                                                    |    | •              |       | •           |      |
| 25       | 2PLAADA71002020         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x200mm, INOX         |    | •              |       | •           | •    |
|          | 2PLAADA71002020NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x200mm, INOX - BLACK |                                                                                      |                | •     | •           | •    |
| 25       | 2PLAADA71002525         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 250x250mm, INOX         |  | •              |       | •           | •    |
|          | 2PLAADA71002525NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 250x250mm, INOX - BLACK |                                                                                      |                | •     | •           | •    |

| Fig.<br>No. | Modinox Art./ Order No. | Description                                                                                      |                                                                                      | Color (*)         |       | Application |      |
|-------------|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------|-------|-------------|------|
|             |                         |                                                                                                  |                                                                                      | stainles<br>steel | antr. | rigid       | flex |
| 25          | 2PLAADA71003030         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x300mm, INOX         |    | •                 |       | •           | •    |
|             | 2PLAADA71003030NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x300mm, INOX - BLACK |                                                                                      |                   | •     | •           | •    |
| 25          | 2PLAADA71002040         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x400mm, INOX         |  | •                 |       | •           | •    |
|             | 2PLAADA71002040NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x400mm, INOX - BLACK |                                                                                      |                   | •     | •           | •    |
| 25          | 2PLAADA71003040         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x400mm, INOX         |  | •                 |       | •           | •    |
|             | 2PLAADA71003040NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x400mm, INOX - BLACK |                                                                                      |                   | •     | •           | •    |

| Fig. No. | Modinox Art./ Order No. | Description                                                                           |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                       |                                                                                      | stainless steel | antr. | rigid       | flex |
| 25       | 2PLAADA61002020         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 200x200mm, INOX |   | •               |       | •           | •    |
|          | 2PLAADA61002525         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 250x250mm, INOX |                                                                                      | •               |       | •           | •    |
|          | 2PLAADA61003030         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 300x300mm, INOX |                                                                                      | •               |       | •           | •    |
|          | 2PLAADA61002040         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 200x400mm, INOX |                                                                                      | •               |       | •           | •    |
|          | 2PLAADA61003040         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 300x400mm, INOX |                                                                                      | •               |       | •           | •    |
|          | 2PTGKIMU100             | Insulation kit ISOMU for wall passage                                                 |  | •               |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                                                                         |                                                                                      | Color (*)      |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------|-------|-------------|------|
|          |                         |                                                                                                                     |                                                                                      | stainles steel | antr. | rigid       | flex |
|          | 2PTGKIRA100 + la pente  | Insulation kit ISORA for pitched roof passage                                                                       |    | •              |       | •           |      |
|          | 2PTGKIRAV100 + la pente | Insulation kit ISORA for pitched roof passage, roof and floor, includes a junction collar and 4 ventilation grilles |                                                                                      | •              |       | •           |      |
|          | 2PTGKIFO100             | Insulation kit FOURP for ceiling passage. Complete wood floor kit                                                   |  | •              |       | •           |      |
|          | 2PTGKIFO100BE           | Insulation kit FOURP for ceiling passage. Complete concrete floor kit                                               |                                                                                      | •              |       | •           |      |
|          | 2PTGKIFOV100            | Insulation kit FOURP for ceiling + storey floor passage. Complete wood floor kit                                    |                                                                                      | •              |       | •           |      |
|          | 2PTGKIFOVBE100          | Insulation kit FOURP for ceiling + storey floor passage. Complete concrete floor kit                                |                                                                                      | •              |       | •           |      |
|          | 2PTGPPDR100BL           | Ceiling finishing plates - Whit lacquered - Option for kit FOURP                                                    |  | •              |       | •           |      |





## 6.13




## Modinox - PLA system Ø130 - Ø200




| Fig. No. | Modinox Art./ Order No. | Description                                                                                                |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                            |                                                                                      | stainless steel | antr. | rigid       | flex |
|          | 2PLAMAFM130BEL          | Barbas appliance connection: Adapter Barbas Ø130/200 mm → Modinox PLA Ø130/200 mm. L= 230 mm. INOX         |    | •               |       | •           |      |
|          | 2PLAMAFM130BELNO        | Barbas appliance connection: Adapter Barbas Ø130/200 mm → Modinox PLA Ø130/200 mm. L= 230 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 100      | 2PLAMAFM130100BEL       | Barbas appliance connection: Adapter Barbas Ø130/200 mm → Modinox PLA Ø100/153 mm. L= 180 mm. INOX         |  | •               |       | •           |      |
|          | 2PLAMAFM130100BELNO     | Barbas appliance connection: Adapter Barbas Ø130/200 mm → Modinox PLA Ø100/153 mm. L= 180 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |



| Fig. No. | Modinox Art./ Order No. | Description                                                                        |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                    |                                                                                      | stainless steel | antr. | rigid       | flex |
| 100      | 2PLAMAFM130100          | Adapter Modinox PLA Ø130/200 mm → Modinox PLA Ø100/153 mm. L= 225 mm. INOX         |    | •               |       | •           |      |
|          | 2PLAMAFM130100NO        | Adapter Modinox PLA Ø130/200 mm → Modinox PLA Ø100/153 mm. L= 225 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 110      | 2PLAELDR130250          | Twin-wall balanced flue pipe, L= 250 mm., INOX                                     |   | •               |       | •           |      |
|          | 2PLAELDR130250NO        | Twin-wall balanced flue pipe, L= 250 mm., INOX - BLACK                             |                                                                                      |                 | •     | •           |      |
| 110      | 2PLAELDR130330          | Twin-wall balanced flue pipe, L= 330 mm., INOX                                     |  | •               |       | •           |      |
|          | 2PLAELDR130330NO        | Twin-wall balanced flue pipe, L= 330 mm., INOX - BLACK                             |                                                                                      |                 | •     | •           |      |
| 110      | 2PLAELDR130500          | Twin-wall balanced flue pipe, L= 500 mm., INOX                                     |  | •               |       | •           |      |
|          | 2PLAELDR130500NO        | Twin-wall balanced flue pipe, L= 500 mm., INOX - BLACK                             |                                                                                      |                 | •     | •           |      |
| 111      | 2PLAELDR1301000         | Twin-wall balanced flue pipe, L= 1000 mm., INOX                                    |  | •               |       | •           |      |
|          | 2PLAELDR1301000NO       | Twin-wall balanced flue pipe, L= 1000 mm., INOX - BLACK                            |                                                                                      |                 | •     | •           |      |



| Fig. No. | Modinox Art./ Order No. | Description                                                                        |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                    |                                                                                      | stainless steel | antr. | rigid       | flex |
| 112      | 2PLAELRE130500          | Telescopic twin-wall balanced flue pipe, L= min. 300 / max. 500 mm., IN-OX         |    | •               |       | •           |      |
|          | 2PLAELRE130500NO        | Telescopic twin-wall balanced flue pipe, L= min. 300 / max. 500 mm., IN-OX - BLACK |                                                                                      |                 | •     | •           |      |
| 114      | 2PLACO90130             | Twin-wall balanced flue elbow 90°, IN-OX                                           |   | •               |       | •           |      |
|          | 2PLACO90130NO           | Twin-wall balanced flue elbow 90°, IN-OX - BLACK                                   |                                                                                      |                 | •     | •           |      |
| 115      | 2PLACO45130             | Twin-wall balanced flue elbow 45°, IN-OX                                           |  | •               |       | •           |      |
|          | 2PLACO45130NO           | Twin-wall balanced flue elbow 45°, IN-OX - BLACK                                   |                                                                                      |                 | •     | •           |      |
| 115      | 2PLACO30130             | Twin-wall balanced flue elbow 30°, IN-OX                                           |  | •               |       | •           |      |
|          | 2PLACO30130NO           | Twin-wall balanced flue elbow 30°, IN-OX - BLACK                                   |                                                                                      |                 | •     | •           |      |
| 115      | 2PLACO15130             | Twin-wall balanced flue elbow 15°, IN-OX                                           |  | •               |       | •           |      |
|          | 2PLACO15130NO           | Twin-wall balanced flue elbow 15°, IN-OX - BLACK                                   |                                                                                      |                 | •     | •           |      |




| Fig. No. | Modinox Art./ Order No. | Description                                              |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                          |                                                                                      | stainless steel | antr. | rigid       | flex |
| 116      | 2PLACHAR130             | Vertical (roof) termination cap, L= 360 mm, INOX         |    | •               |       | •           |      |
|          | 2PLACHAR130NO           | Vertical (roof) termination cap, L= 360 mm, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 117      | 2DIVS5IN200             | Roof flashing for a roof pitch of 5°- 30°, INOX          |    | •               |       | •           |      |
|          | 2DIVS5IN200NO           | Roof flashing for a roof pitch of 5°- 30°, INOX - BLACK  |                                                                                      |                 | •     | •           |      |
| 117      | 2DIVS3IN200             | Roof flashing for a roof pitch of 31°- 45°, INOX         |  | •               |       | •           |      |
|          | 2DIVS3IN200NO           | Roof flashing for a roof pitch of 31°- 45°, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 117      | 2DIVRTS1                | Roof tile fitting for roof flashing                      |  |                 | •     | •           |      |
| 117      | 2DIVCSOL200             | Collar for roof flashing, INOX                           |  | •               |       | •           |      |
|          | 2DIVCSOL200NO           | Collar for roof flashing, INOX - BLACK                   |                                                                                      | •               |       | •           |      |
|          | 2DIVJOCO205             | Sealing ring for collar roof flashing                    |                                                                                      |                 |       | •           |      |



| Fig. No. | Modinox Art./ Order No. | Description                                                                                       |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                   |                                                                                      | stainless steel | antr. | rigid       | flex |
| 117      | 2DIVS5PS200             | Roof flashing, standard model, lead: 0,6mm thick, for a roof pitch of 5°- 30°, with IN-OX cone    |    | •               |       | •           |      |
|          | 2DIVS5PR210             | Roof flashing, large tile model, lead: 1,0mm thick, for a roof pitch of 5°- 30°, with IN-OX cone  |                                                                                      | •               |       | •           |      |
|          | 2DIVS3PS200             | Roof flashing, standard model, lead: 0,6mm thick, for a roof pitch of 31°- 45°, with IN-OX cone   |                                                                                      | •               |       | •           |      |
|          | 2DIVS3PR210             | Roof flashing, large tile model, lead: 1,0mm thick, for a roof pitch of 31°- 45°, with IN-OX cone |                                                                                      | •               |       | •           |      |
| 117      | 2DIVC5LA200NO           | Cone cover for roof flashing, lead, for a roof pitch of 5°- 30°, INOX - BLACK                     |  |                 | •     | •           |      |
|          | 2DIVC3LA200NO           | Cone cover for roof flashing, lead, for a roof pitch of 31°- 45°, INOX - BLACK                    |                                                                                      |                 | •     | •           |      |
| 118      | 2DIVSOIN200             | Roof flashing for existing chimney or flat roof, INOX                                             |  | •               |       | •           |      |
|          | 2DIVSOIN200NO           | Roof flashing for existing chimney or flat roof, INOX - BLACK                                     |                                                                                      |                 | •     | •           |      |

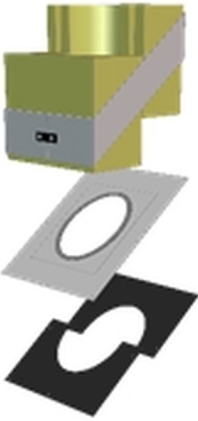

| Fig. No. | Modinox Art./ Order No. | Description                                                                                  |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                              |                                                                                      | stainless steel | antr. | rigid       | flex |
| 119      | 2PLATHOR130             | Horizontal (wall) termination kit, with rosettes, L= min. 580 mm / max. 780 mm. INOX         |    | •               |       | •           |      |
|          | 2PLATHOR130NO           | Horizontal (wall) termination kit, with rosettes, L= min. 580 mm / max. 780 mm. INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 120      | 2PLACOJO130             | Locking band, quick-fastening. INOX                                                          |    | •               |       | •           |      |
|          | 2PLACOJO130NO           | Locking band, quick-fastening. INOX - BLACK                                                  |                                                                                      |                 | •     | •           |      |
| 121      | 2PLAJOIF130             | Fiber seal                                                                                   |  |                 |       | •           |      |
| 123      | 2PLACOMU130             | Wall strap, INOX                                                                             |  | •               |       | •           |      |
|          | 2PLACOMU130NO           | Wall strap, INOX - BLACK                                                                     |                                                                                      |                 | •     | •           |      |
| 123      | 2PLASUPLR130            | Wall support, quick fastening                                                                |  | •               |       | •           |      |
| 124      | 2PLACOCF130             | Set of ceiling finishing plates / Fire stops                                                 |  | •               |       | •           |      |
| 124      | 2PLAPVEN130             | Ceiling finishing plate with ventilation openings                                            |  | •               |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                   |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                               |                                                                                      | stainless steel | antr. | rigid       | flex |
| 124      | 2PLAROSA130BT           | Rosette, IN-OX                                                |    | •               |       | •           |      |
|          | 2PLAROSA130BTNO         | Rosette, IN-OX - BLACK                                        |                                                                                      |                 | •     | •           |      |
|          | 2PLAROSA130BTBL         | Rosette, IN-OX - WHITE                                        |                                                                                      |                 |       | •           |      |
| 124      | 2PLAROSA130             | Rosette with 4 mounting holes, INOX                           |    | •               |       | •           |      |
|          | 2PLAROSA130NO           | Rosette with 4 mounting holes, INOX - BLACK                   |                                                                                      |                 | •     | •           |      |
|          | 2PLAROSA130BL           | Rosette with 4 mounting holes, INOX - WHITE                   |                                                                                      |                 |       | •           |      |
| 134      | 2PLAEMES130             | Concentric pipe with gauging orifice, L= 250 mm, INOX         |  | •               |       | •           |      |
|          | 2PLAEMES130NO           | Concentric pipe with gauging orifice, L= 250 mm, INOX - BLACK |                                                                                      |                 | •     | •           |      |
| 135      | 2PLAERAM130             | Concentric pipe with inspection/ cleaning opening, L= 260 mm. |  | •               |       | •           |      |
| 136      | 2PLACOSO130             | Floor support strap                                           |  | •               |       | •           |      |
| 136      | 2PLACTOS130             | Roof strap                                                    |  | •               |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                                                      |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                  |                                                                                      | stainless steel | antr. | rigid       | flex |
| 136      | 2PLAEPDS130             | Clearance roof/floor pas-sage                                                                    |    | •               |       | •           |      |
| 125      | 2PLAADA71302020         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x200mm, INOX         |    | •               |       | •           | •    |
|          | 2PLAADA71302020NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x200mm, INOX - BLACK |                                                                                      |                 | •     | •           | •    |
| 125      | 2PLAADA71302525         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 250x250mm, INOX         |  | •               |       | •           | •    |
|          | 2PLAADA71302525NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 250x250mm, INOX - BLACK |                                                                                      |                 | •     | •           | •    |

| Fig. No. | Modinox Art./ Order No. | Description                                                                                      |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                  |                                                                                      | stainless steel | antr. | rigid       | flex |
| 125      | 2PLAADA71303030         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x300mm, INOX         |    | •               |       | •           | •    |
|          | 2PLAADA71303030NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x300mm, INOX - BLACK |                                                                                      |                 | •     | •           | •    |
| 125      | 2PLAADA71302040         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x400mm, INOX         |  | •               |       | •           | •    |
|          | 2PLAADA71302040NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 200x400mm, INOX - BLACK |                                                                                      |                 | •     | •           | •    |
| 125      | 2PLAADA71303040         | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x400mm, INOX         |  | •               |       | •           | •    |
|          | 2PLAADA71303040NO       | Adapter Modinox PLA → Flexible pipe, with chimney bottom finishing plate 300x400mm, INOX - BLACK |                                                                                      |                 | •     | •           | •    |

| Fig.<br>No. | Modinox Art./ Order No. | Description                                                                           |                                                                                      | Color (*)          |       | Application |      |
|-------------|-------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------|-------|-------------|------|
|             |                         |                                                                                       |                                                                                      | stainless<br>steel | antr. | rigid       | flex |
| 125         | 2PLAADA61302020         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 200x200mm, INOX |   | •                  |       | •           | •    |
|             | 2PLAADA61302525         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 250x250mm, INOX |                                                                                      | •                  |       | •           | •    |
|             | 2PLAADA61303030         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 300x300mm, INOX |                                                                                      | •                  |       | •           | •    |
|             | 2PLAADA61302040         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 200x400mm, INOX |                                                                                      | •                  |       | •           | •    |
|             | 2PLAADA61303040         | Adapter Flexible pipe → Modinox PLA, with chimney top finishing plate 300x400mm, INOX |                                                                                      | •                  |       | •           | •    |
|             | 2PTGKIMU130             | Insulation kit ISOMU for wall passage                                                 |  | •                  |       | •           |      |

| Fig. No. | Modinox Art./ Order No. | Description                                                                                                         |                                                                                      | Color (*)       |       | Application |      |
|----------|-------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------|-------------|------|
|          |                         |                                                                                                                     |                                                                                      | stainless steel | antr. | rigid       | flex |
|          | 2PTGKIRA130 + la pente  | Insulation kit ISORA for pitched roof passage                                                                       |    | •               |       | •           |      |
|          | 2PTGKIRAV130 + la pente | Insulation kit ISORA for pitched roof passage, roof and floor, includes a junction collar and 4 ventilation grilles |                                                                                      | •               |       | •           |      |
|          | 2PTGKIFO130             | Insulation kit FOURP for ceiling passage. Complete wood floor kit                                                   |  | •               |       | •           |      |
|          | 2PTGKIFO130BE           | Insulation kit FOURP for ceiling passage. Complete concrete floor kit                                               |                                                                                      | •               |       | •           |      |
|          | 2PTGKIFOV130            | Insulation kit FOURP for ceiling + storey floor passage. Complete wood floor kit                                    |                                                                                      | •               |       | •           |      |
|          | 2PTGKIFOVBE130          | Insulation kit FOURP for ceiling + storey floor passage. Complete concrete floor kit                                |                                                                                      | •               |       | •           |      |
|          | 2PTGPPDR130BL           | Ceiling finishing plates - White lacquered - Option for kit FOURP                                                   |  | •               |       | •           |      |





# barbas .

Your Barbas dealer